

Modeling Current-Voltage Curves Using Bilinear Interpolation

Preprint

B. Marion, J. del Cueto, and B. Sekulic

*To be presented at the World Renewable Energy
Congress VIII and Expo
Denver, Colorado
August 29–September 3, 2004*



NREL

National Renewable Energy Laboratory
1617 Cole Boulevard, Golden, Colorado 80401-3393
303-275-3000 • www.nrel.gov

Operated for the U.S. Department of Energy
Office of Energy Efficiency and Renewable Energy
by Midwest Research Institute • Battelle

Contract No. DE-AC36-99-GO10337

NOTICE

The submitted manuscript has been offered by an employee of the Midwest Research Institute (MRI), a contractor of the US Government under Contract No. DE-AC36-99GO10337. Accordingly, the US Government and MRI retain a nonexclusive royalty-free license to publish or reproduce the published form of this contribution, or allow others to do so, for US Government purposes.

This report was prepared as an account of work sponsored by an agency of the United States government. Neither the United States government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States government or any agency thereof.

Available electronically at <http://www.osti.gov/bridge>

Available for a processing fee to U.S. Department of Energy and its contractors, in paper, from:

U.S. Department of Energy
Office of Scientific and Technical Information
P.O. Box 62
Oak Ridge, TN 37831-0062
phone: 865.576.8401
fax: 865.576.5728
email: <mailto:reports@adonis.osti.gov>

Available for sale to the public, in paper, from:

U.S. Department of Commerce
National Technical Information Service
5285 Port Royal Road
Springfield, VA 22161
phone: 800.553.6847
fax: 703.605.6900
email: orders@ntis.fedworld.gov
online ordering: <http://www.ntis.gov/ordering.htm>



Modeling Current-Voltage Curves Using Bilinear Interpolation

B. Marion, J. del Cueto, and B. Sekulic
National Renewable Energy Laboratory
1617 Cole Boulevard, Golden CO 80401
bill_marion@nrel.gov

ABSTRACT

Current-voltage (I-V) curves for photovoltaic (PV) modules representing all PV technologies were modeled by bilinearly interpolating the I-V curves from a PV module's four reference I-V curves. The interpolation was performed first with respect to open-circuit voltage to account for PV module temperature, and second with respect to short-circuit current to account for irradiance. The modeled I-V curves compared closely with measured I-V curves for 26 PV modules located at the National Renewable Energy Laboratory.

BACKGROUND

Expanding on work by Hishikawa et al.¹ that developed translation equations for interpolating with respect to irradiance a current-voltage (I-V) curve from two I-V curves at the same photovoltaic (PV) module temperature, Marion et al.² developed a method where four I-V curves could be used to bilinearly interpolate an I-V curve with respect to both irradiance and PV module temperature.

Figure 1 illustrates the bilinear interpolation methodology. I-V curves 1-4 are the reference I-V curves measured for combinations of two PV module temperature and two irradiance settings. I-V curves 1 and 2 are measured at the same nominal irradiance, likewise for I-V curves 3 and 4. I-V curves 1 and 3 are measured at the same nominal PV module temperature, likewise for I-V curves 2 and 4. The term nominal is used when referring to irradiance and temperature settings because the method's equations

accommodate unintended variations in settings that might occur. From the four reference curves, temperature and irradiance correction factors for short-circuit current (I_{sc}) and open-circuit voltage (V_{oc}) are determined: α , the I_{sc} correction factor for PV module temperature ($^{\circ}C^{-1}$); β , the V_{oc} correction factor for PV module temperature ($^{\circ}C^{-1}$); $mT + b$, the V_{oc} correction for irradiance as a linear function of PV module temperature T , where m ($^{\circ}C^{-1}$) is the slope and b (dimensionless) is the y-intercept.

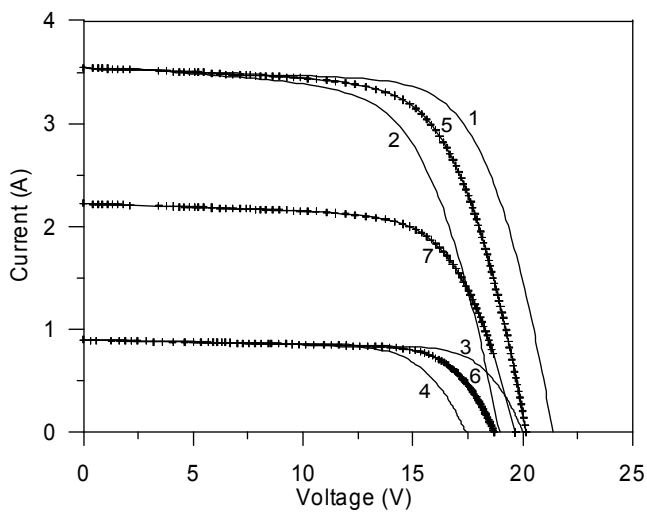


Figure 1. Numbering of I-V curves for bilinear interpolation

To perform the bilinear interpolation, I-V curves 5 and 6 are interpolated with respect to Voc from I-V curves 1 and 2, and 3 and 4, respectively, and I-V curve 7 is interpolated with respect to Isc from I-V curves 5 and 6. I-V curve 7 is the translated I-V curve for the desired conditions of irradiance and PV module temperature. The method was evaluated² for seven PV module technologies by comparing modeled and measured I-V curves. I-V curve measurements were performed both indoors using a solar simulator and outdoors under clear skies. The indoor and outdoor results were favorable with root-mean-square-errors (rmse) of 1.5% or less for the I-V curve parameters of Isc, Voc, maximum power (Pm), voltage at maximum power (Vmp), and current at maximum power (Imp). For fill factor (FF), the rmse was 2%. Mean-bias-errors (mbe) were less than 1%.

This paper presents additional evaluation results for the method by using I-V curve measurement data from the Performance and Energy Rating Test bed (PERT) located at the National Renewable Energy Laboratory (NREL).

COMPARISON OF MODELED AND MEASURED I-V CURVES

The PERT contains numerous PV modules of various technology and manufacture. Each PV module faces south and is tilted from the horizontal at an angle of 40°, which approximates the local latitude. The PV modules are operated at their peak-power point to provide energy performance data, except once every 15 minutes they are temporarily disconnected in order that a complete I-V curve can be measured. Supporting data include incident solar irradiance measured with a pyranometer and PV module back-surface temperature measured with a thermocouple.

From a day with clear skies (September 22, 2003 for the majority of the PV modules, but August 14, 2003 for a few), four I-V curves per PV module were selected for use as the reference I-V curves. The remaining I-V curves for the day were used to compare with bilinearly interpolated/extrapolated I-V curves for the same conditions of irradiance and PV module temperature.

Reference I-V curves were typically selected for times of 7:00 (reference I-V curve 3), 10:00 (reference I-V curve 1), 13:45 (reference I-V curve 2), and 16:45 hours (reference I-V curve 4). This resulted in irradiance values of 920-940 W/m² for reference I-V curves 1 and 2 and 200-220 W/m² for reference I-V curves 3 and 4. PV module back-surface temperatures were typically 48°C for reference I-V curve 1, 58°C for reference I-V curve 2, 12°C for reference I-V curve 3, and 32°C for reference I-V curve 4. When using in-situ data of this nature, achievable differences in temperature between reference curves 1 and 2 are a function of the rise in ambient air temperature over the mid portion of the day, which is climate dependent. A more humid climate with a smaller hourly variation in temperature would result in a smaller temperature differential than the 10°C achieved at NREL's location. The reference I-V curves for previous evaluations² had greater temperature differentials of 25° to 30°C. Typically, a greater temperature differential is desirable for general application of the method because it lessens the need to extrapolate performance and the resulting impact on accuracy.

Besides the relatively small temperature difference between reference I-V curves 1 and 2, their temperature range is not the same as I-V curves 3 and 4, in fact, they do not even overlap. Consequently, for any desired I-V curve temperature, one or both of the

intermediate I-V curves 5 and 6 will be extrapolated. I-V curve 7 will also require extrapolation for irradiances above 940 W/m^2 (midday values as great as 1080 W/m^2) and below 200 W/m^2 (morning and evening values as small as 30 W/m^2). Although the reference I-V curves are not optimum for the temperature and irradiance conditions for which they are applied, they do provide a rigorous test of the method's ability to extrapolate I-V curves outside reference I-V curve temperature and irradiance ranges.

For comparison with the remaining I-V curves measured on the clear day, modeled I-V curves were bilinearly interpolated for the same conditions of PV module temperature and irradiance. To account for the temperature gradient between the PV module cell and the PV module back-surface, 2.5°C per 1000 W/m^2 irradiance was added to the PV module back-surface temperature to establish the PV module temperature.³ Irradiance was determined from the measured I_{sc} and PV module temperature.² This minimized errors associated with spectral response differences between the pyranometer and the PV modules, orientation misalignment between the pyranometer and the PV modules, and differences in their angular response.

Comparisons of modeled (bilinearly interpolated) and measured I-V curves were made using rmse and mbe statistics to show differences between the modeled and measured I-V curve parameters V_{oc} , P_m , V_{mp} , I_{mp} , and FF. Statistics are not provided for I_{sc} because the manner in which the irradiance was determined results in no error when modeling I_{sc} . Consequently, the results portray translation and measurement errors not related to irradiance or spectral mismatch errors. The rmse provides information on the variation of the modeled values from the measured values, while the mbe provides the average deviation of the modeled values from the measured values.

The statistical results are shown in Table I for 26 PV modules. As indicated by the low errors in the tables, the method performed well for all the PV module technologies. On average, rmses were 0.6% for V_{oc} , 0.8% for P_m , 0.7% for V_{mp} , 0.5% for I_{mp} , and 1.1% for FF. The average mbes ranged from -0.2% to +0.1%. The poorest results were for the CdS/CdTe #485005 PV module from manufacturer (Man.) D where the model estimates of V_{oc} for irradiances below 100 W/m^2 were too large, thereby increasing the rmse for V_{oc} , and also for FF. Modeling for two other PV modules, the CdS/CdTe #14407 and single-crystal Si #270-2301 PV module, overestimated the FF for irradiances below 100 W/m^2 and this resulted in larger FF rmses. At low irradiances, the FF of these PV modules decreased more than the extrapolated FF.

For nine PV modules with known stable performance, comparisons between modeled and measured I-V curves were made for the period July-December 2003. Table II includes the results for this comparison and shows that the approximately 6000 I-V curves for each PV module were successfully modeled from four reference I-V curves. Error statistics were increased only slightly when compared to those in Table I even though the range of irradiances and PV module temperatures were larger than that occurring on the day the reference I-V curves were measured.

Figure 2 uses the July-December data to contour the P_m bias error of the single-crystal Si #270-2301 PV module, which had the highest errors, as a function of irradiance and PV module temperature. In Figure 2, the irradiance and temperature conditions for the reference I-V curves are represented by the location of the bold numbers 1-4 and for measured I-V curves (only 10% shown for clarity) by the location of the + symbols. Errors are smallest near reference I-V curve conditions, underestimate P_m by 0-3%

between the reference I-V curve irradiance levels, and increasingly overestimate P_m (as a percentage) at lower irradiances. The contours near reference I-V curves 1 and 2 locations show a positive bias error with increasing temperature and a negative bias error with decreasing temperature. The temperature difference between reference I-V curves 1 and 2 is only 8°C; if the reference I-V curves had been measured with a larger temperature difference the change in bias error with temperature would likely have been less. For the other PV modules in Table II, contours of P_m bias errors were more favorable, particularly at low irradiance, than those shown in Figure 2.

Table I. Model root-mean-square-error (rmse) and mean-bias-error (mbe) as a percentage of the average V_{oc} , P_m , V_{mp} , I_{mp} , or FF using single day data. (~ 45 I-V curves per module)

PV Module	Man.	V_{oc}		P_m		V_{mp}		I_{mp}		FF	
		rmse	mbe	rmse	mbe	rmse	mbe	rmse	mbe	rmse	mbe
a-Si #47-37	A	0.3	0.1	0.6	0.0	0.3	0.1	0.4	-0.1	0.7	-0.2
a-Si #51-13	A	0.3	0.2	0.4	0.0	0.3	0.0	0.2	0.0	0.7	-0.3
a-Si/a-Si #6766	B	0.3	-0.1	0.9	-0.2	0.4	-0.2	0.7	0.0	0.9	-0.2
a-Si/a-Si #6760	B	0.4	-0.1	1.3	-0.2	0.7	-0.2	0.7	-0.1	1.3	-0.3
a-Si/a-Si #390M-14	C	0.1	0.0	0.4	-0.1	0.4	0.0	0.2	-0.1	0.4	-0.1
a-Si/a-Si #390M-9	C	0.2	0.0	0.4	0.0	0.5	-0.2	0.2	0.1	0.4	-0.1
a-Si/a-Si:Ge #49	D	0.6	0.4	0.5	0.2	0.8	-0.5	0.4	-0.3	0.5	-0.2
a-Si/a-Si/a-Si:Ge #74	B	0.5	0.2	0.6	-0.1	0.6	0.0	0.4	-0.1	0.6	-0.3
a-Si/a-Si/a-Si:Ge #1736	B	0.2	-0.1	0.4	-0.2	0.2	0.0	0.3	-0.2	0.6	-0.2
a-Si/a-Si/a-Si:Ge #16912	B	0.3	0.0	0.4	-0.1	0.4	0.0	0.3	0.0	0.7	-0.1
a-Si/a-Si/a-Si:Ge #011	E	0.3	0.1	0.4	-0.1	0.2	0.1	0.4	-0.1	0.7	-0.2
CdS/CdTe #485005	D	6.3	1.2	2.2	0.0	1.7	-1.1	3.5	1.3	4.1	-1.3
CdS/CdTe #K98012825	F	0.8	0.0	1.1	0.1	1.1	0.2	0.7	0.1	0.8	0.0
Cds/CdTe #14407	F	0.6	-0.1	2.2	-0.8	1.9	-0.7	0.9	-0.3	3.2	-0.9
CdS/Cu(Ga,In)(S,Se) #4079	G	0.3	-0.1	0.4	-0.2	0.3	-0.2	0.2	-0.1	0.4	-0.2
CdS/Cu(Ga,In)(S,Se) #5165	H	0.2	-0.1	0.3	0.0	0.2	0.0	0.2	0.1	0.3	0.0
Multi-crystal Si #0162	I	0.1	0.0	0.6	0.0	0.3	0.0	0.3	0.0	0.6	-0.2
Multi-crystal Si #0194	I	0.1	0.0	0.7	-0.4	0.6	-0.4	0.3	-0.1	1.0	-0.6
Multi-crystal Si #4978	J	0.8	-0.1	1.0	-0.2	0.9	-0.2	0.3	0.0	0.7	-0.2
Multi-crystal Si #9365	D	0.1	0.1	0.4	0.2	0.3	0.1	0.1	0.0	0.3	0.0
Multi-crystal Si #9366	D	0.2	0.0	0.4	-0.3	0.2	0.0	0.4	-0.3	0.4	-0.3
Single-crystal Si #270-2301	D	0.4	0.1	1.4	-0.2	2.1	0.2	0.9	-0.2	4.0	0.4
Single-crystal Si #585-2316	D	0.1	0.0	0.6	-0.2	0.4	-0.2	0.2	-0.1	0.8	-0.3
Single-crystal Si #585-2164	D	0.1	0.0	0.6	0.1	0.6	0.0	0.2	0.2	0.8	0.2
Single-crystal Si #270-2577	D	0.5	0.0	1.1	0.0	1.7	0.0	0.9	0.4	1.6	-0.3
Single-crystal Si #0442	H	0.5	0.2	0.9	0.1	0.9	0.1	0.3	0.0	0.8	-0.1
Average		0.6	0.1	0.8	-0.1	0.7	-0.1	0.5	0.0	1.1	-0.2

Table II. Model root-mean-square-error (rmse) and mean-bias-error (mbe) as a percentage of the average V_{oc} , P_m , V_{mp} , I_{mp} , or FF using July-December 2003 data. (~ 6000 I-V curves per module)

PV Module	Man.	V_{oc}		P_m		V_{mp}		I_{mp}		FF	
		rmse	mbe	rmse	mbe	rmse	mbe	rmse	mbe	rmse	mbe
CdS/Cu(Ga,In)(S,Se) #5165	H	0.4	0.0	1.0	-0.1	0.9	-0.2	0.4	0.0	1.1	-0.4
Multi-crystal Si #0162	I	0.4	0.1	1.0	-0.2	0.8	-0.1	0.7	-0.1	1.3	-0.2
Multi-crystal Si #0194	I	0.2	0.1	1.3	-0.2	0.7	-0.2	0.7	-0.1	1.3	-0.3
Multi-crystal Si #9365	D	0.3	0.1	0.7	0.1	0.5	0.0	0.6	0.1	1.0	0.0
Multi-crystal Si #9366	D	0.4	0.1	0.8	-0.3	0.8	0.1	0.8	-0.4	0.8	-0.3
Single-crystal Si #270-2301	D	0.6	0.3	2.0	0.0	3.6	0.7	1.5	-0.1	7.2	2.2
Single-crystal Si #585-2316	D	0.4	0.2	1.0	0.3	1.5	0.5	0.6	0.2	3.2	1.3
Single-crystal Si #585-2164	D	0.4	0.2	1.5	0.7	1.5	0.3	1.0	0.6	4.3	1.9
Single-crystal Si #270-2577	D	1.5	1.3	2.1	0.9	1.8	-0.8	2.6	1.9	3.5	0.7
Average		0.5	0.3	1.3	0.1	1.3	0.0	1.0	0.2	2.6	0.5

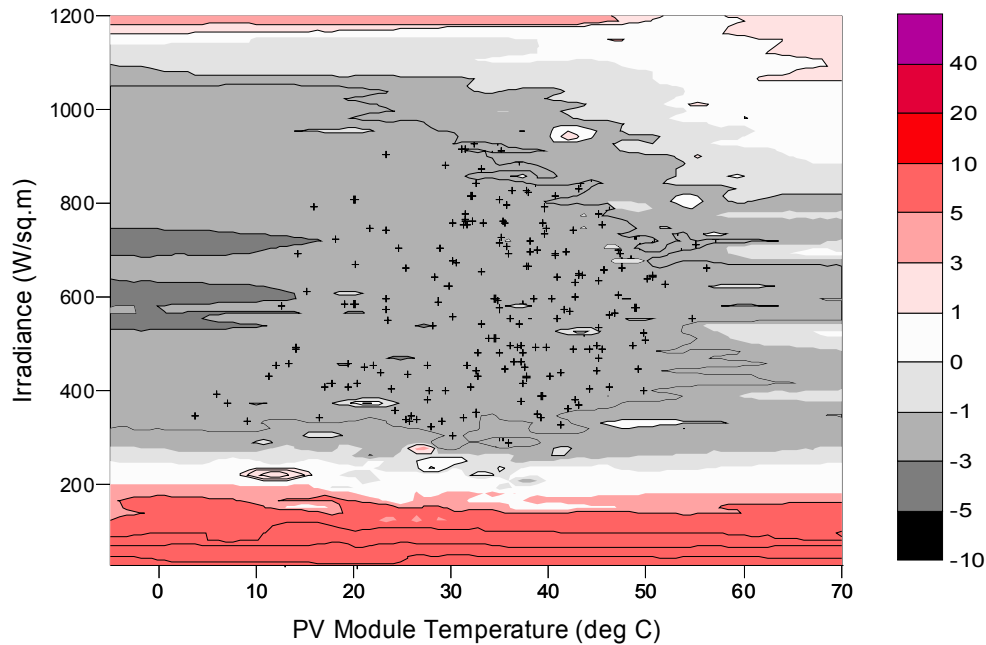


Figure 2. Contour map for the single-crystal Si #2301 PV module (which had the highest errors) showing percent bias in P_m when translated from reference I-V curves measured for conditions represented by the location of the bold numbers 1-4. Map based on July-December 2003 data (~6000 I-V curves), + symbols show ranges of temperature and irradiance for the period.

SUMMARY AND DISCUSSION

For 26 PV modules at NREL, I-V curves were modeled, by bilinearly interpolating from four reference I-V curves, and then compared with measured I-V curves for a clear day. The method performed well for all the PV module technologies. On average, rmses were 0.6% for V_{oc} , 0.8% for P_m , 0.7% for V_{mp} , 0.5% for I_{mp} , and 1.1% for FF. The average mbes ranged from -0.2% to +0.1%. For nine of the PV modules, a more extensive evaluation was performed using approximately 6000 I-V curves per PV module for July-December 2003. Error statistics increased only slightly from the clear day error statistics. Because irradiance values were derived from I_{sc} , the error statistics portray model and measurement errors not related to spectral or angular response. Increased errors would have resulted if irradiances were from pyranometer measurements.

REFERENCES

1. Hishikawa Y, Imura Y, Oshiro T. "Irradiance-dependence and translation of the *I-V* characteristics of crystalline silicon solar cells." 28th IEEE PV Specialist Conference, Anchorage, AK, 2000, pp.1464–1467.
2. Marion B, Rummel S, Anderberg A. Current-voltage curve translation by bilinear interpolation, *Progress in Photovoltaics: Research and Applications* 2004; **12**:1–16.
3. Whitfield K, Osterwald C. Procedure for determining the uncertainty of photovoltaic module for outdoor electrical performance, *Progress in Photovoltaics: Research and Applications* 2001; **9**:87–102.

REPORT DOCUMENTATION PAGE

Form Approved
OMB No. 0704-0188

The public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing the burden, to Department of Defense, Executive Services and Communications Directorate (0704-0188). Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.

PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ORGANIZATION.

1. REPORT DATE (DD-MM-YYYY) August 2004		2. REPORT TYPE Conference Paper		3. DATES COVERED (From - To)		
4. TITLE AND SUBTITLE Modeling Current-Voltage Curves Using Bilinear Interpolation: Preprint			5a. CONTRACT NUMBER DE-AC36-99-GO10337			
			5b. GRANT NUMBER			
			5c. PROGRAM ELEMENT NUMBER			
6. AUTHOR(S) B. Marion, J. del Cueto, and B. Sekulic			5d. PROJECT NUMBER NREL/CP-520-36232			
			5e. TASK NUMBER PVP47301			
			5f. WORK UNIT NUMBER			
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) National Renewable Energy Laboratory 1617 Cole Blvd. Golden, CO 80401-3393				8. PERFORMING ORGANIZATION REPORT NUMBER NREL/CP-520-36232		
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S) NREL		
				11. SPONSORING/MONITORING AGENCY REPORT NUMBER		
12. DISTRIBUTION AVAILABILITY STATEMENT National Technical Information Service U.S. Department of Commerce 5285 Port Royal Road Springfield, VA 22161						
13. SUPPLEMENTARY NOTES						
14. ABSTRACT (Maximum 200 Words) Current-voltage (I-V) curves for photovoltaic (PV) modules representing all PV technologies were modeled by bilinearly interpolating the I-V curves from a PV module's four reference I-V curves. The interpolation was performed first with respect to open-circuit voltage to account for PV module temperature, and second with respect to short-circuit current to account for irradiance. The modeled I-V curves compared closely with measured I-V curves for 26 PV modules located at the National Renewable Energy Laboratory.						
15. SUBJECT TERMS PV; current-voltage (I-V); module; bilinear interpolation; irradiance; modeling						
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT UL	18. NUMBER OF PAGES	19a. NAME OF RESPONSIBLE PERSON	
a. REPORT Unclassified	b. ABSTRACT Unclassified	c. THIS PAGE Unclassified			19b. TELEPHONE NUMBER (Include area code)	

Standard Form 298 (Rev. 8/98)
Prescribed by ANSI Std. Z39.18