



Controlled Hydrogen Fleet and Infrastructure Demonstration and Validation Project

Fall 2008

Composite Data Products
Final Version September 24, 2008

Keith Wipke, Sam Sprik, Jennifer Kurtz, and Todd Ramsden

Technical Report
NREL/TP-560-44256
October 2008

NREL is operated for DOE by the Alliance for Sustainable Energy, LLC

Contract No. DE-AC36-08-GO28308





Disclaimer and Government License

This work has been authored by Midwest Research Institute (MRI) under Contract No. DE-AC36-99GO10337 with the U.S. Department of Energy (the “DOE”). The United States Government (the “Government”) retains and the publisher, by accepting the work for publication, acknowledges that the Government retains a non-exclusive, paid-up, irrevocable, worldwide license to publish or reproduce the published form of this work, or allow others to do so, for Government purposes.

Neither MRI, the DOE, the Government, nor any other agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe any privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not constitute or imply its endorsement, recommendation, or favoring by the Government or any agency thereof. The views and opinions of the authors and/or presenters expressed herein do not necessarily state or reflect those of MRI, the DOE, the Government, or any agency thereof.


Controlled Hydrogen Fleet and Infrastructure Demonstration and Validation Project

Fall 2008

*Composite Data Products
September 24, 2008 (Final)*

Keith Wipke, Sam Sprik, Jennifer Kurtz, Todd Ramsden


CDP#1: Hours Accumulated and Projected Hours to 10% Stack Voltage Degradation

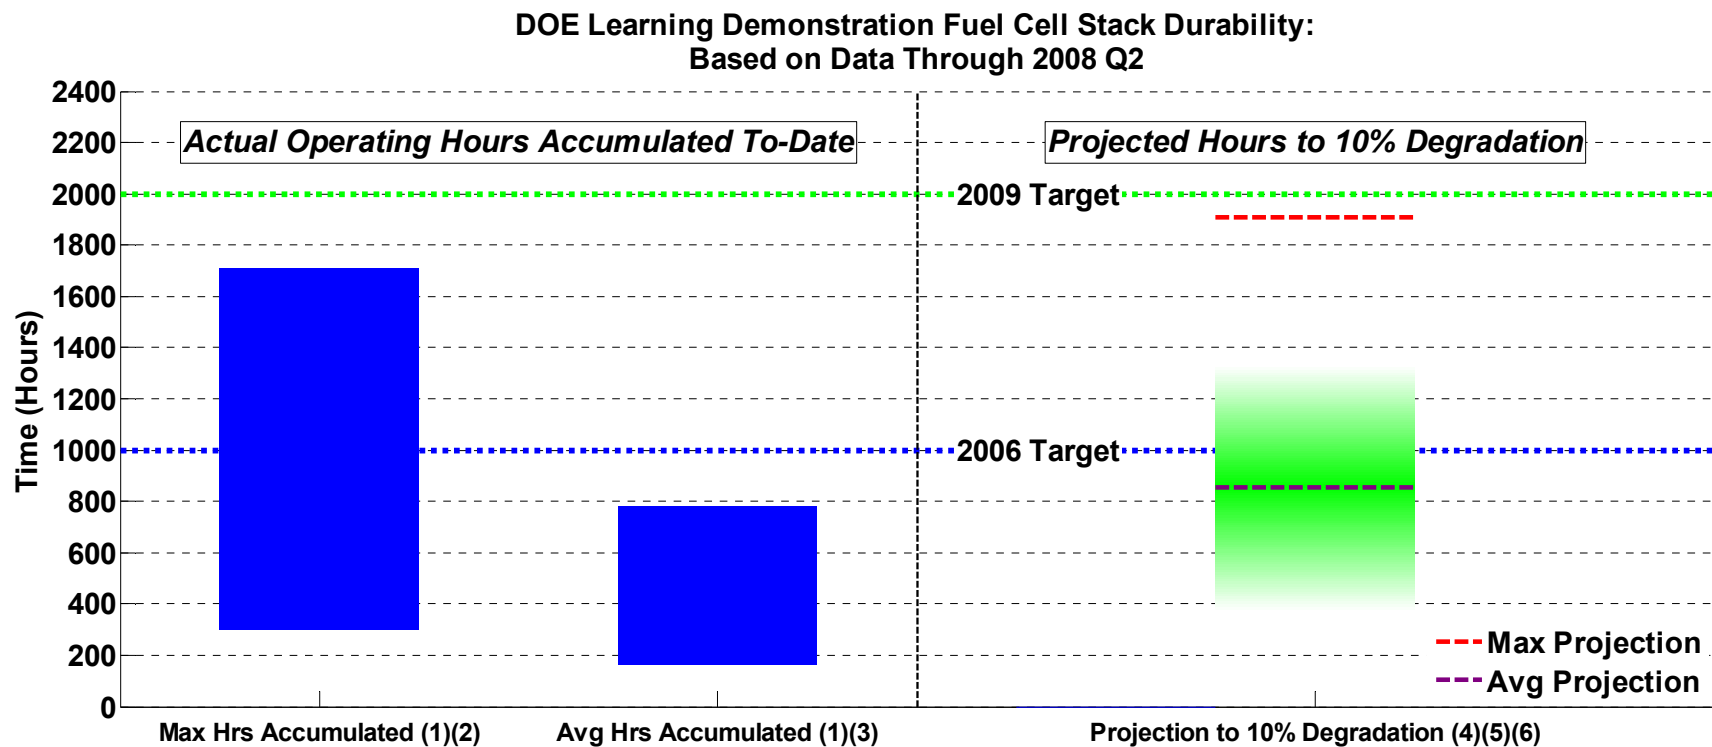

- (1) Range bars created using one data point for each OEM. Some stacks have accumulated hours beyond 10% voltage degradation.
- (2) Range (highest and lowest) of the maximum operating hours accumulated to-date of any OEM's individual stack in "real-world" operation.
- (3) Range (highest and lowest) of the average operating hours accumulated to-date of all stacks in each OEM's fleet.
- (4) Projection using on-road data -- degradation calculated at high stack current. This criterion is used for assessing progress against DOE targets, may differ from OEM's end-of-life criterion, and does not address "catastrophic" failure modes, such as membrane failure.
- (5) Using one nominal projection per OEM: "Max Projection" = highest nominal projection, "Avg Projection" = average nominal projection. The shaded green bar represents an engineering judgment of the uncertainty on the "Avg Projection" due to data and methodology limitations. Projections will change as additional data are accumulated.
- (6) Projection method was modified beginning with 2008 Q2 data.

Created: Sep-03-08 10:36 AM

CDP#2: Vehicle Range

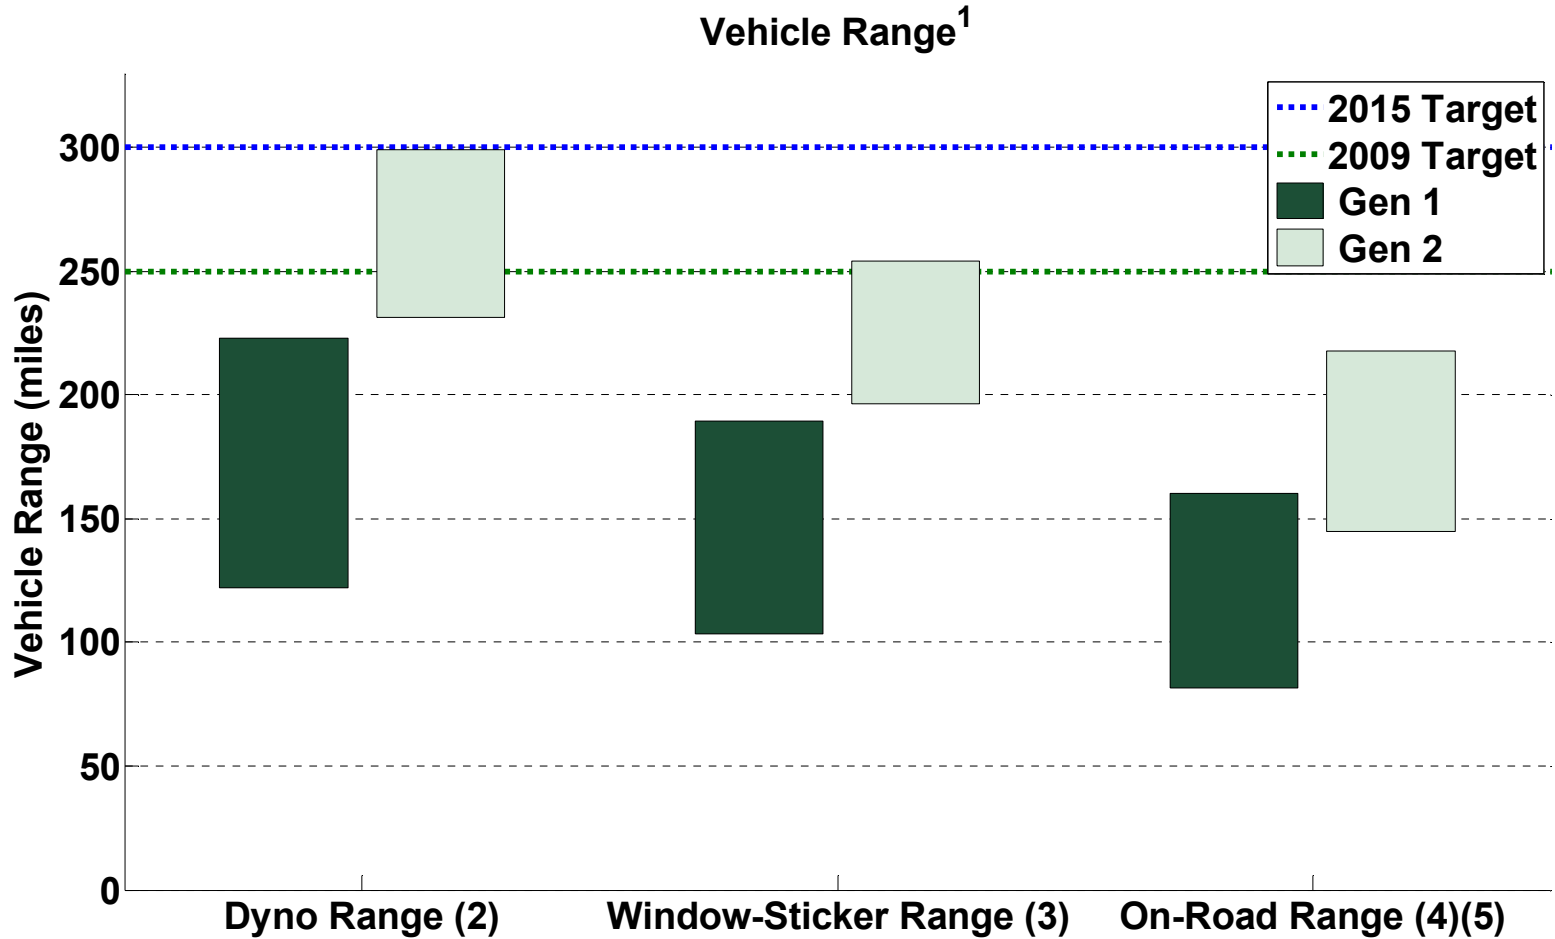

(1) Range is based on fuel economy and usable hydrogen on-board the vehicle. One data point for each make/model.

(2) Fuel economy from unadjusted combined City/Hwy per DRAFT SAE J2572.


(3) Fuel economy from EPA Adjusted combined City/Hwy (0.78 x Hwy, 0.9 x City).

(4) Excludes trips < 1 mile. One data point for on-road fleet average of each make/model.

(5) Fuel economy calculated from on-road fuel cell stack current or mass flow readings.

Created: Sep-22-08 11:51 AM


CDP#6: Fuel Economy

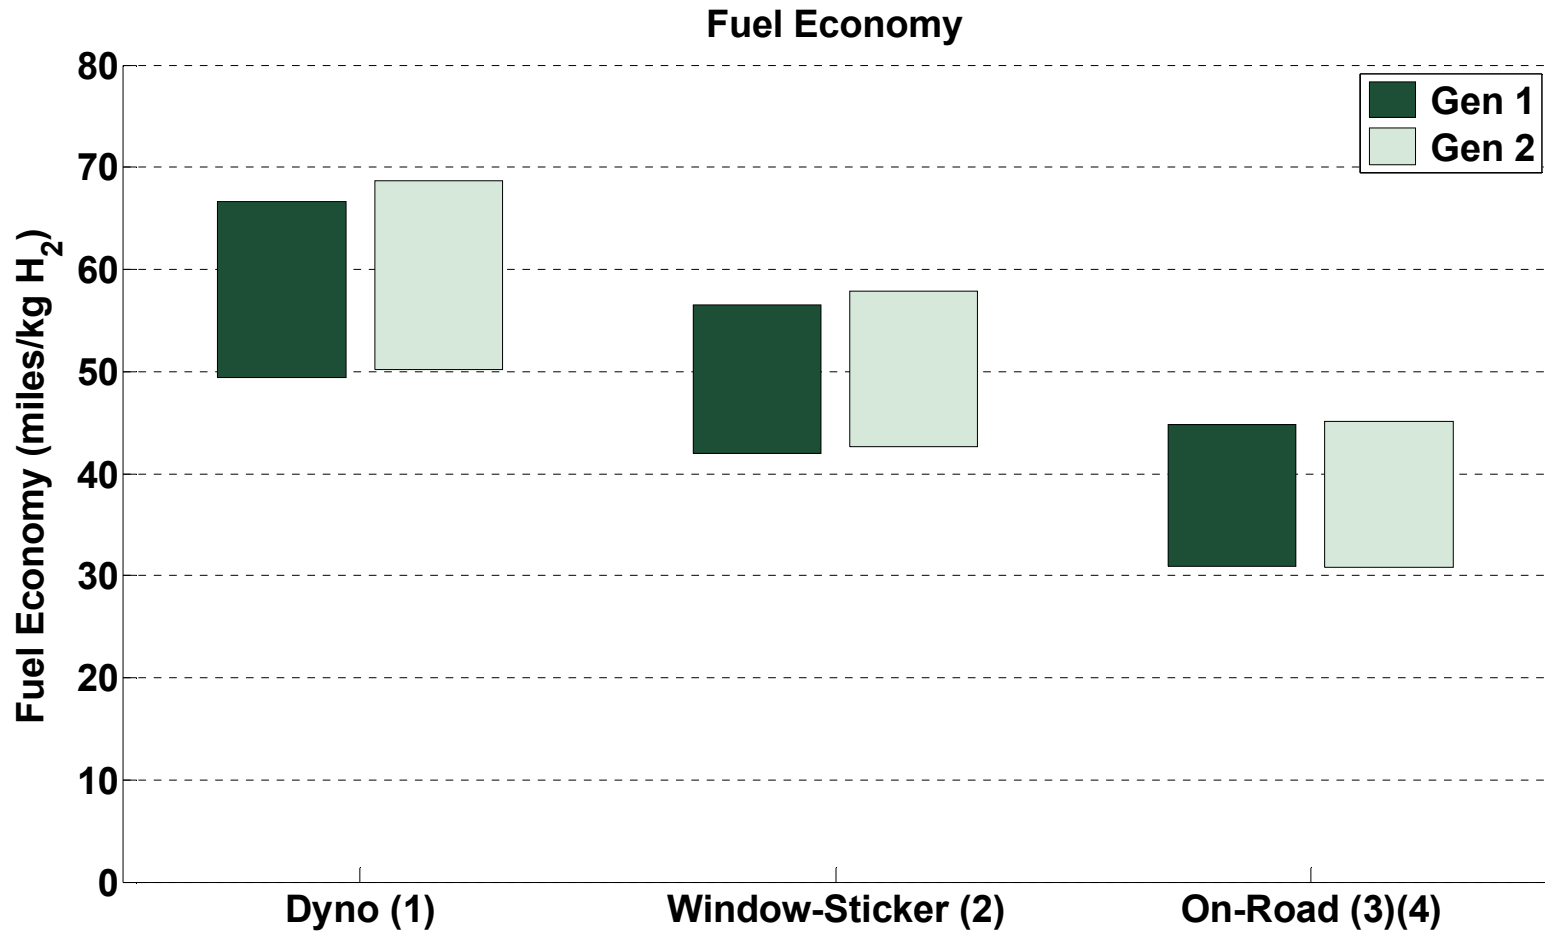

- (1) One data point for each make/model. Combined City/Hwy fuel economy per DRAFT SAE J2572.
- (2) Adjusted combined City/Hwy fuel economy (0.78 x Hwy, 0.9 x City).
- (3) Excludes trips < 1 mile. One data point for on-road fleet average of each make/model.
- (4) Calculated from on-road fuel cell stack current or mass flow readings.

Created: Sep-22-08 11:51 AM

CDP#8: FC System Efficiency

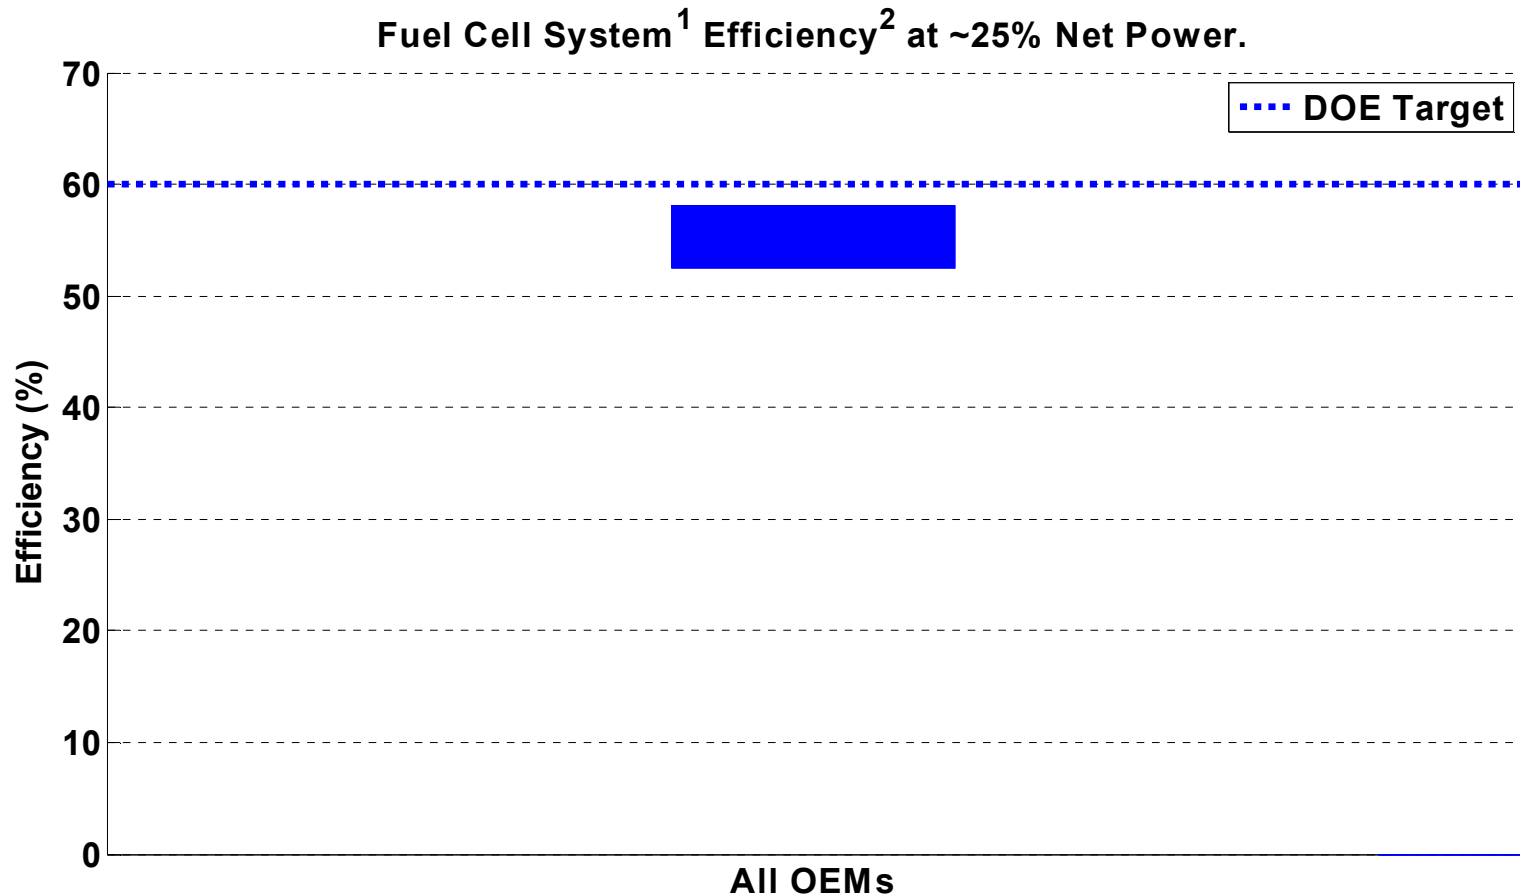


¹ Gross stack power minus fuel cell system auxiliaries, per DRAFT SAEJ2615.

² Ratio of DC output energy to the lower heating value of the input fuel (hydrogen). Excludes power electronics and electric drive.

Created: Aug-29-06 4:09 PM


CDP#9: Safety Reports – Vehicles

Safety Reports - Vehicle Operation

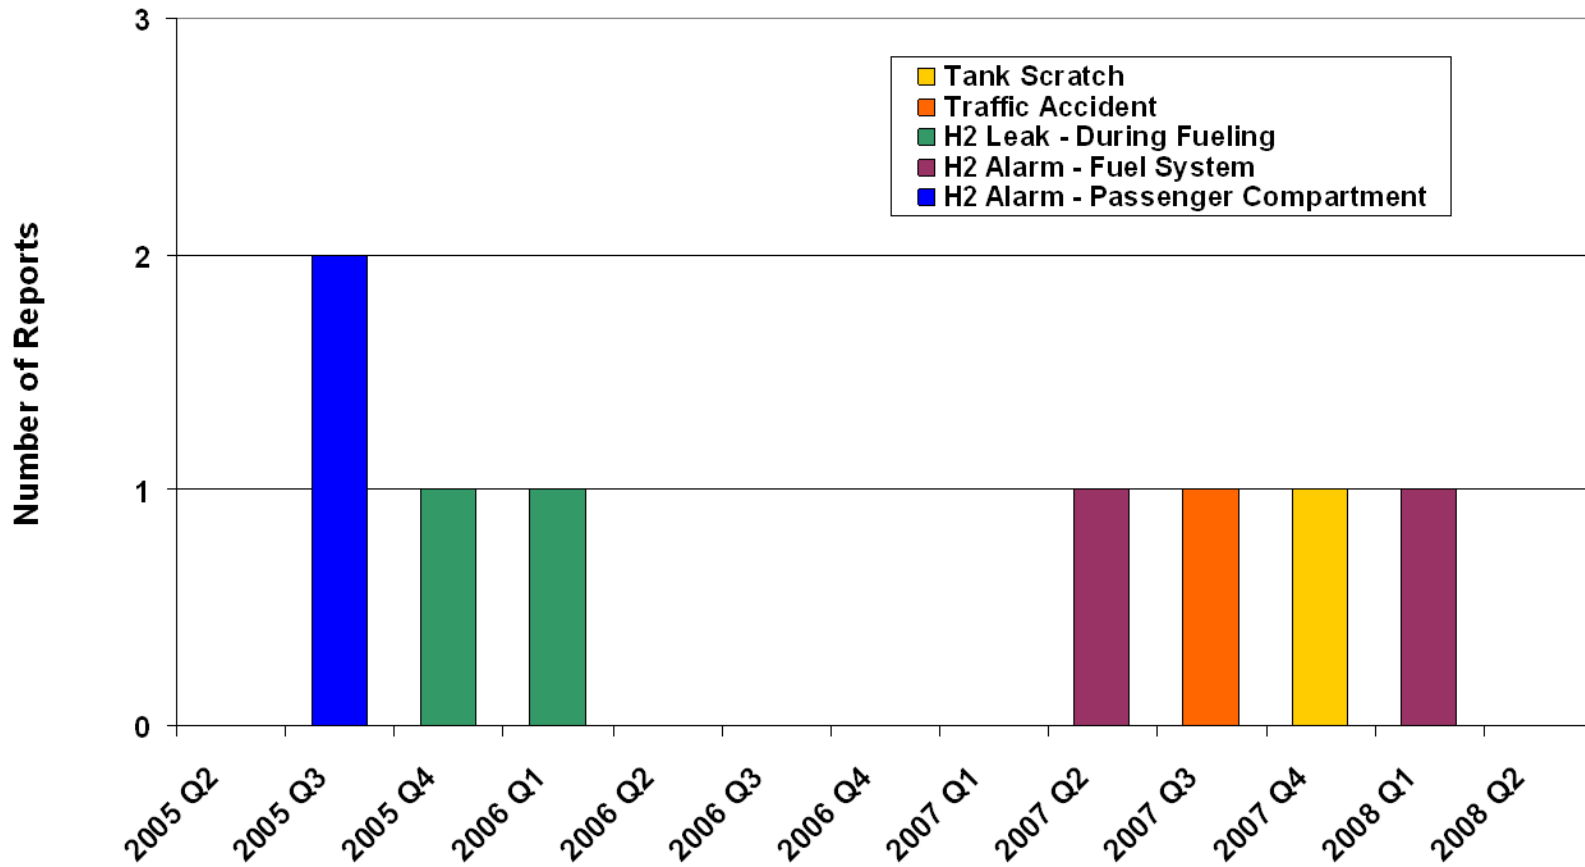

Created: Aug-18-08 3:49 PM


CDP#10: Storage Weight % Hydrogen

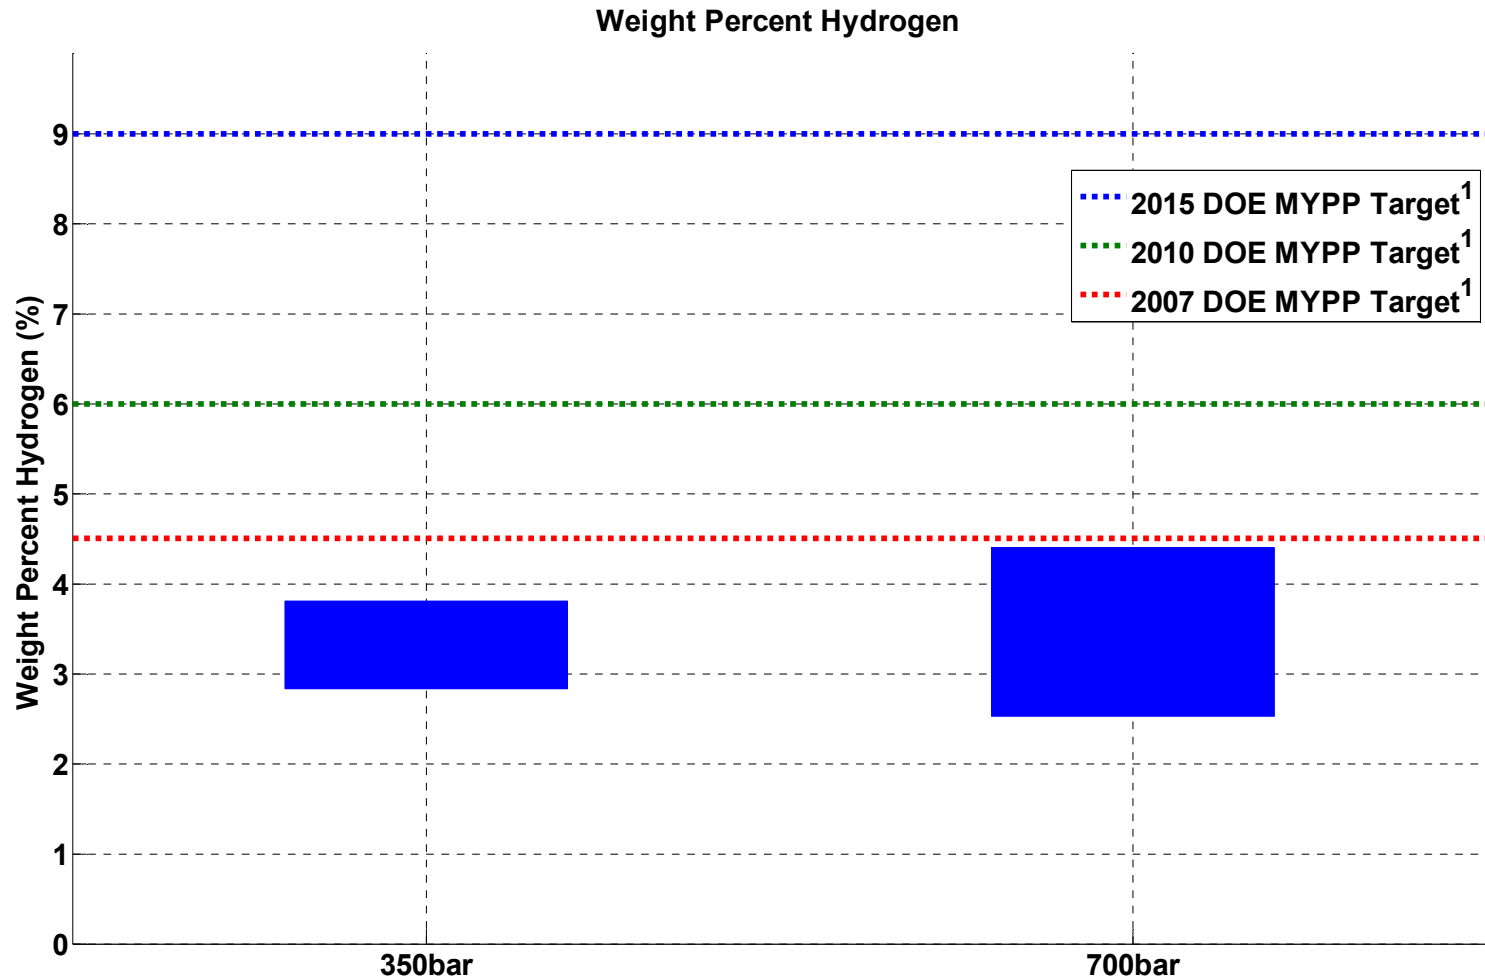

¹Targets are set for advanced materials-based hydrogen storage technologies.

Created: Aug-19-08 11:39 AM


CDP#11: Volumetric Capacity of H2 Storage

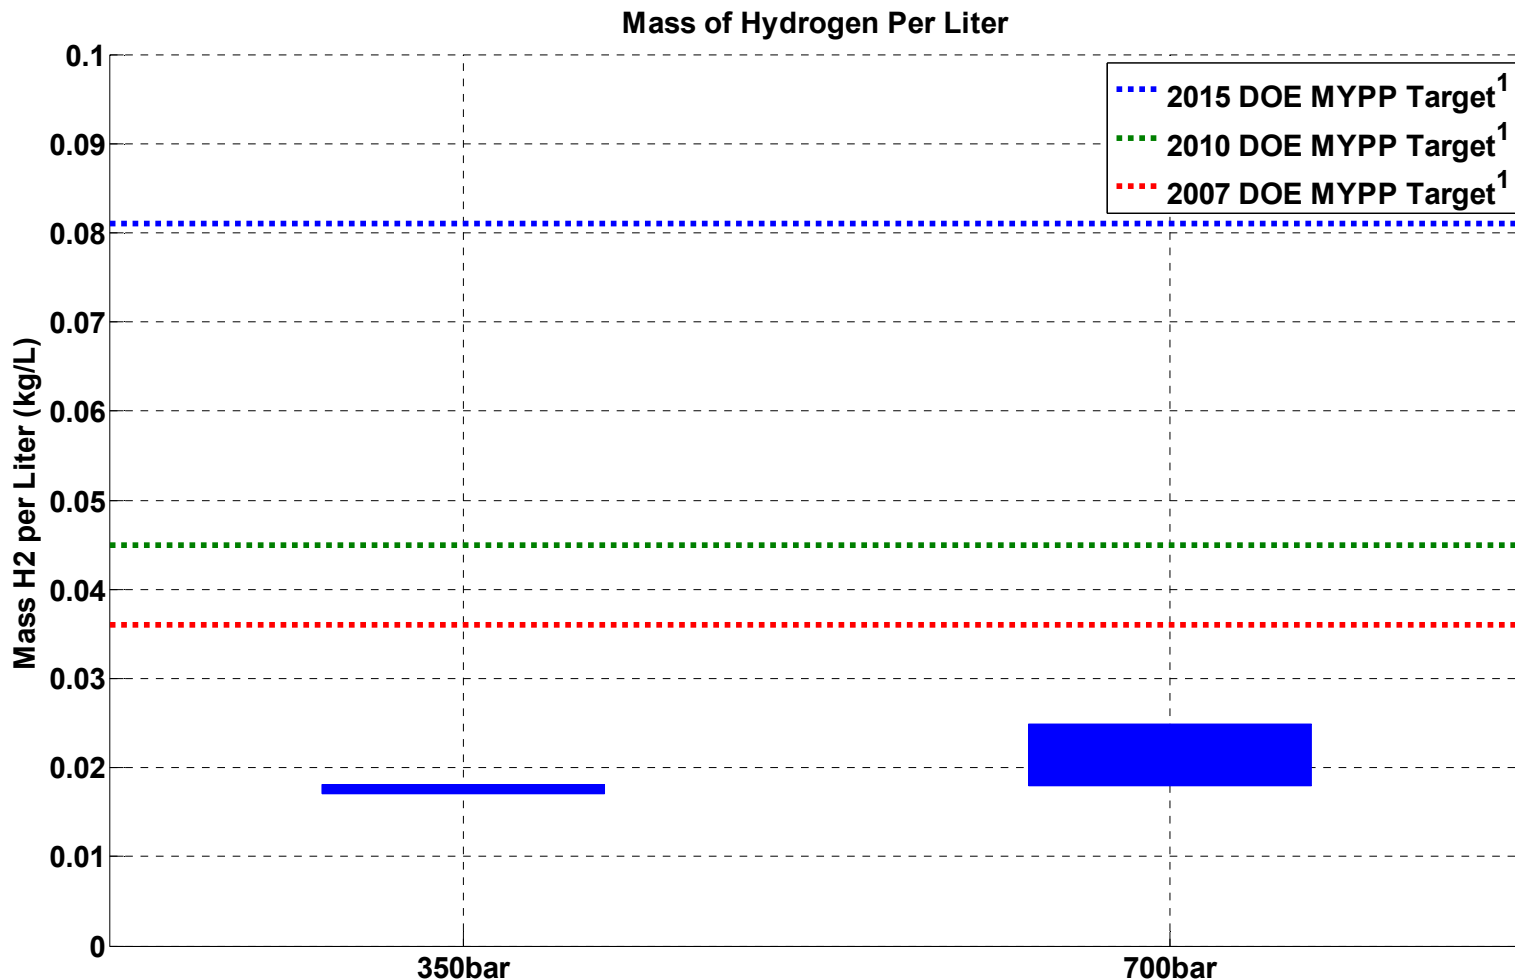

¹Targets are set for advanced materials-based hydrogen storage technologies.

Created: Aug-19-08 11:39 AM

CDP#12: Vehicle Hydrogen Tank Cycle Life

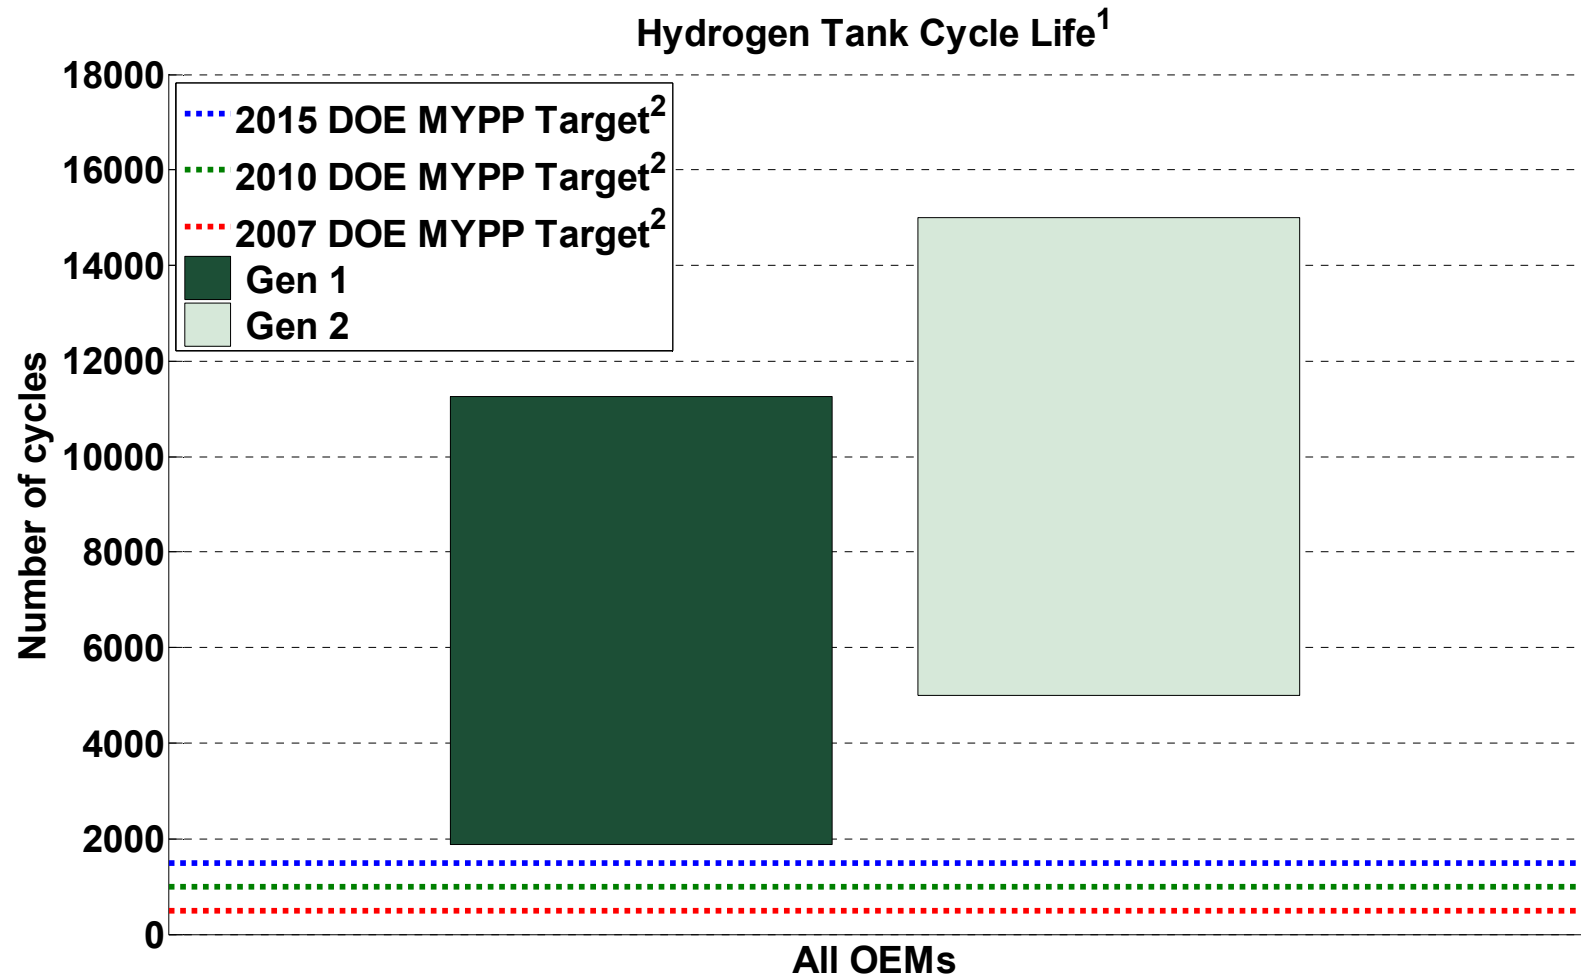


¹Data reported reference NGV2, HGV2, or EIHP standards.

²Some near-term targets have been achieved with compressed and liquid tanks. Emphasis is on advanced materials-based technologies.


Created: Sep-17-08 10:29 AM

CDP#13: On-Site Hydrogen Production Efficiency

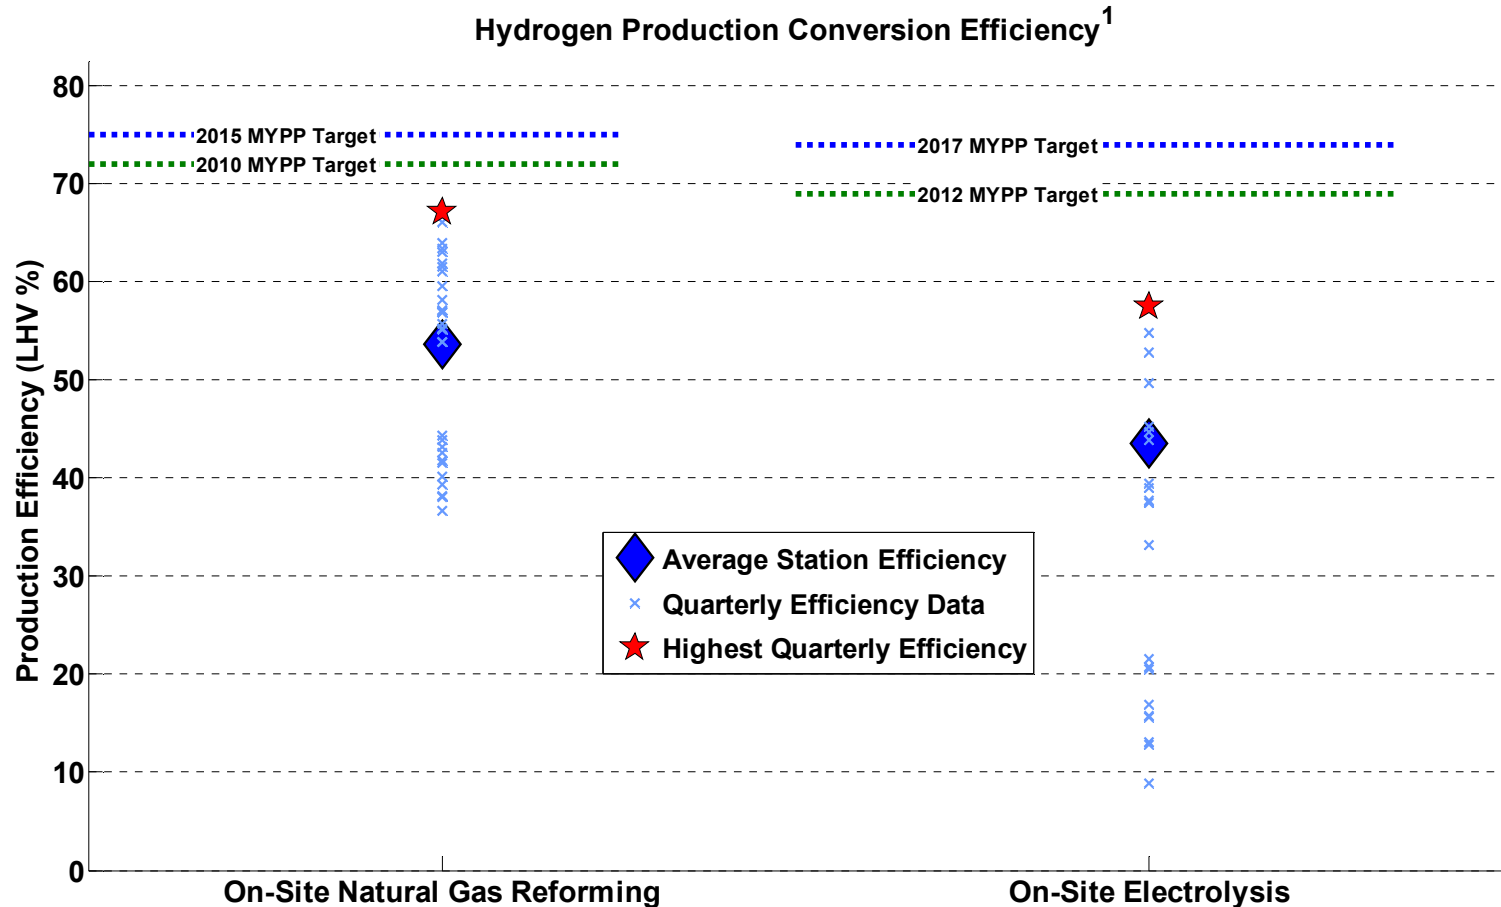

¹Production conversion efficiency is defined as the energy of the hydrogen out of the process (on an LHV basis) divided by the sum of the energy into the production process from the feedstock and all other energy as needed. Conversion efficiency does not include energy used for compression, storage, and dispensing.


CDP#18: Refueling Rates

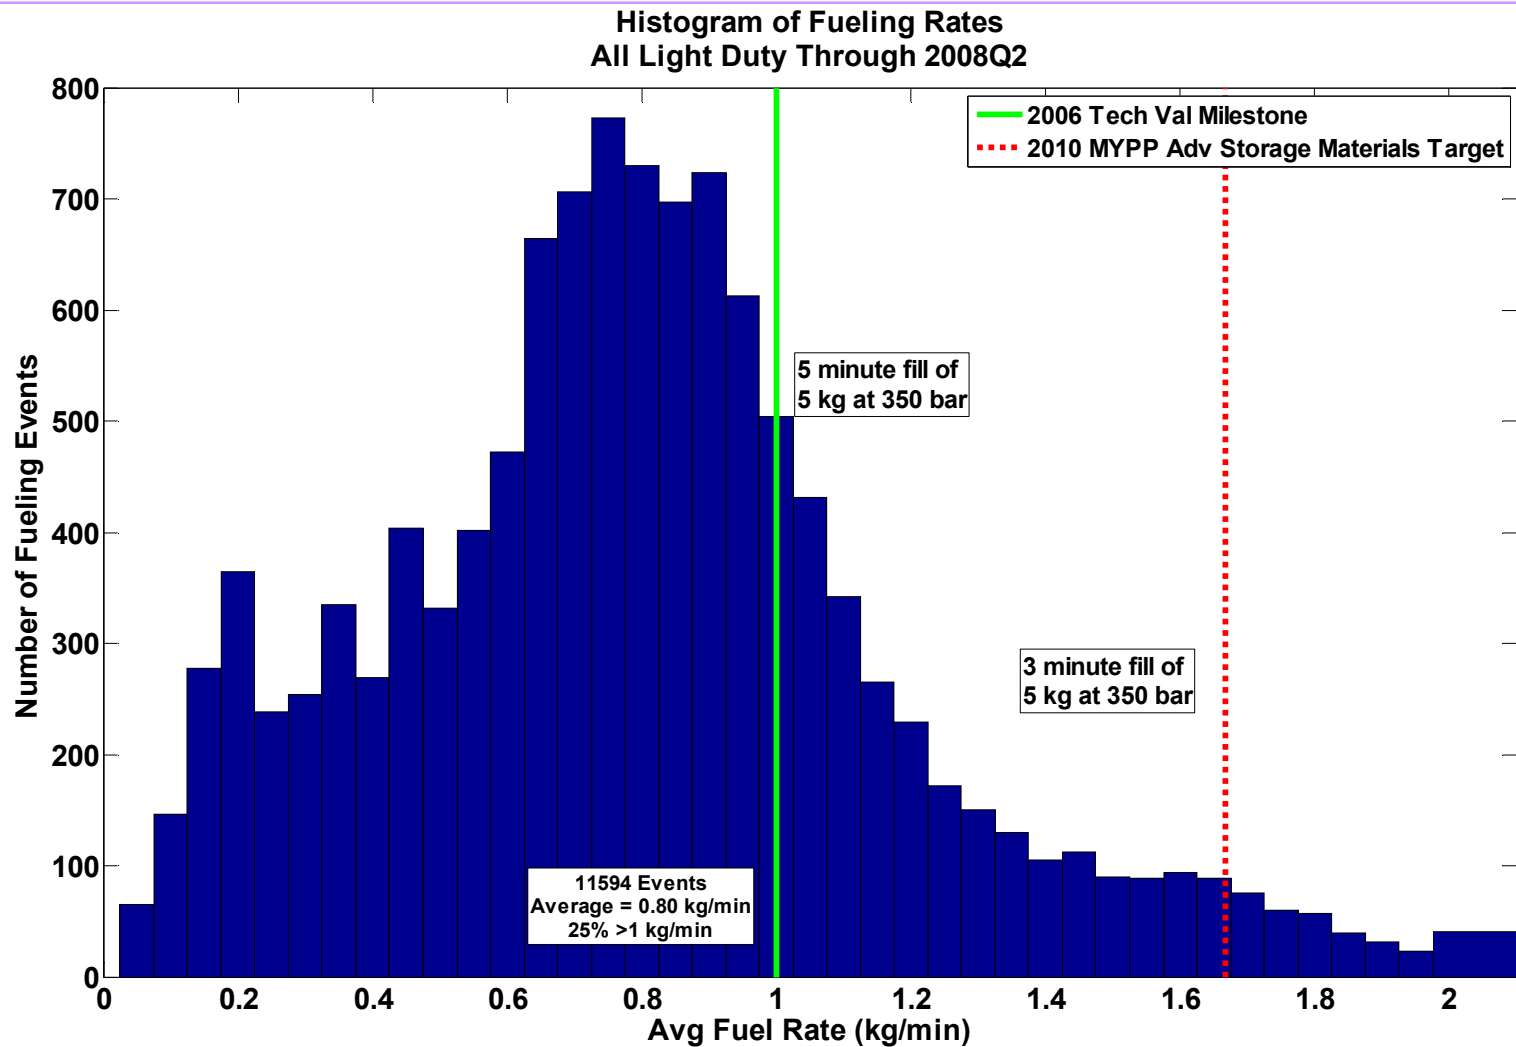

Created: Sep-02-08 4:10 PM

CDP#20: Safety Reports – Infrastructure

Total Infrastructure Safety Reports by Severity and Report Type Through 2008 Q2

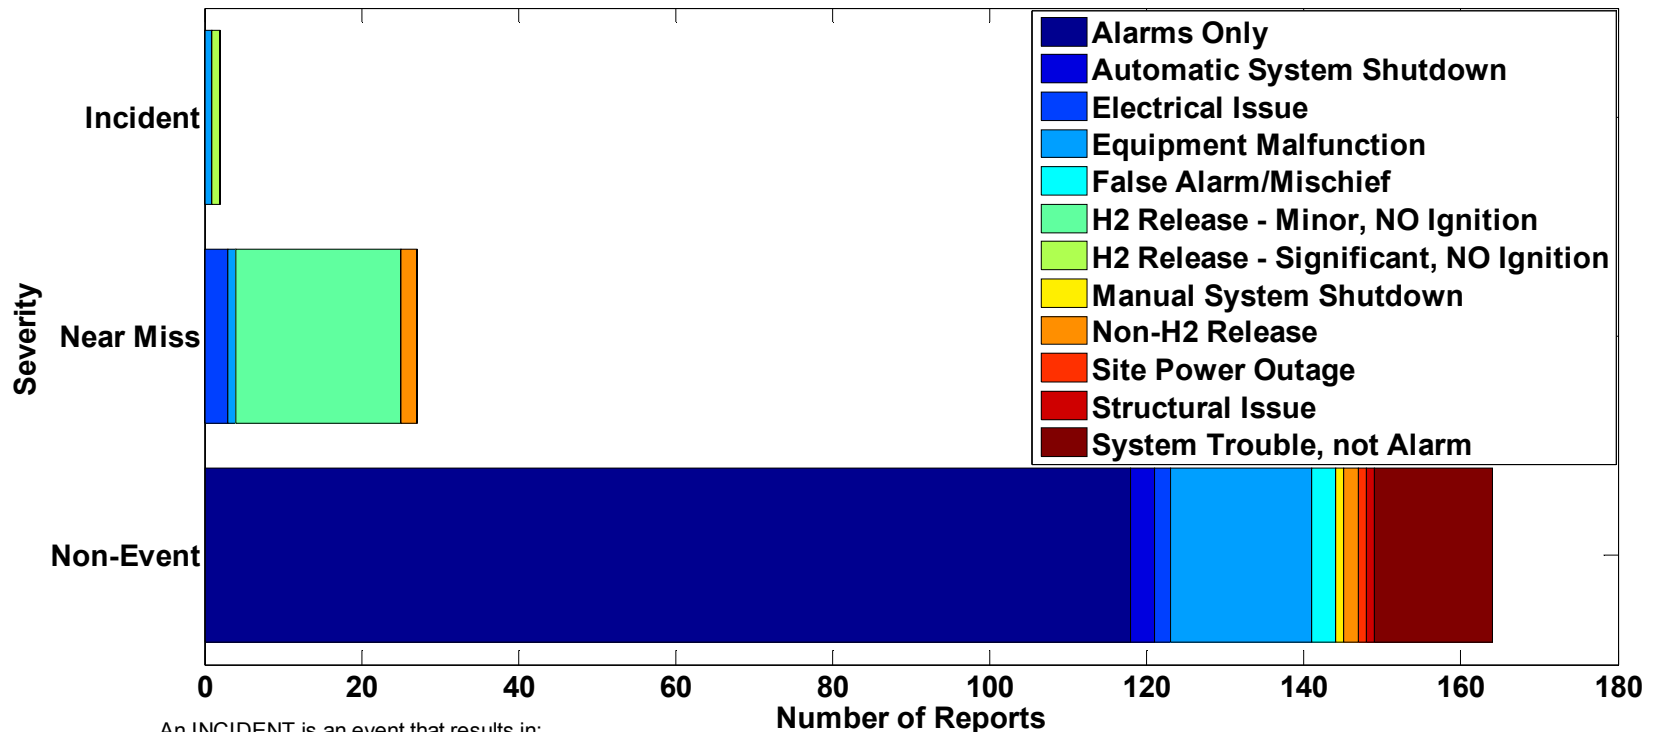


An INCIDENT is an event that results in:

- a lost time accident and/or injury to personnel
- damage/unplanned downtime for project equipment, facilities or property
- impact to the public or environment
- any hydrogen release that unintentionally ignites or is sufficient to sustain a flame if ignited
- release of any volatile, hydrogen containing compound (other than the hydrocarbons used as common fuels)

A NEAR-MISS is:

- an event that under slightly different circumstances could have become an incident
- unplanned H2 release insufficient to sustain a flame


CDP#21: Range of Ambient Temperature During Vehicle Operation

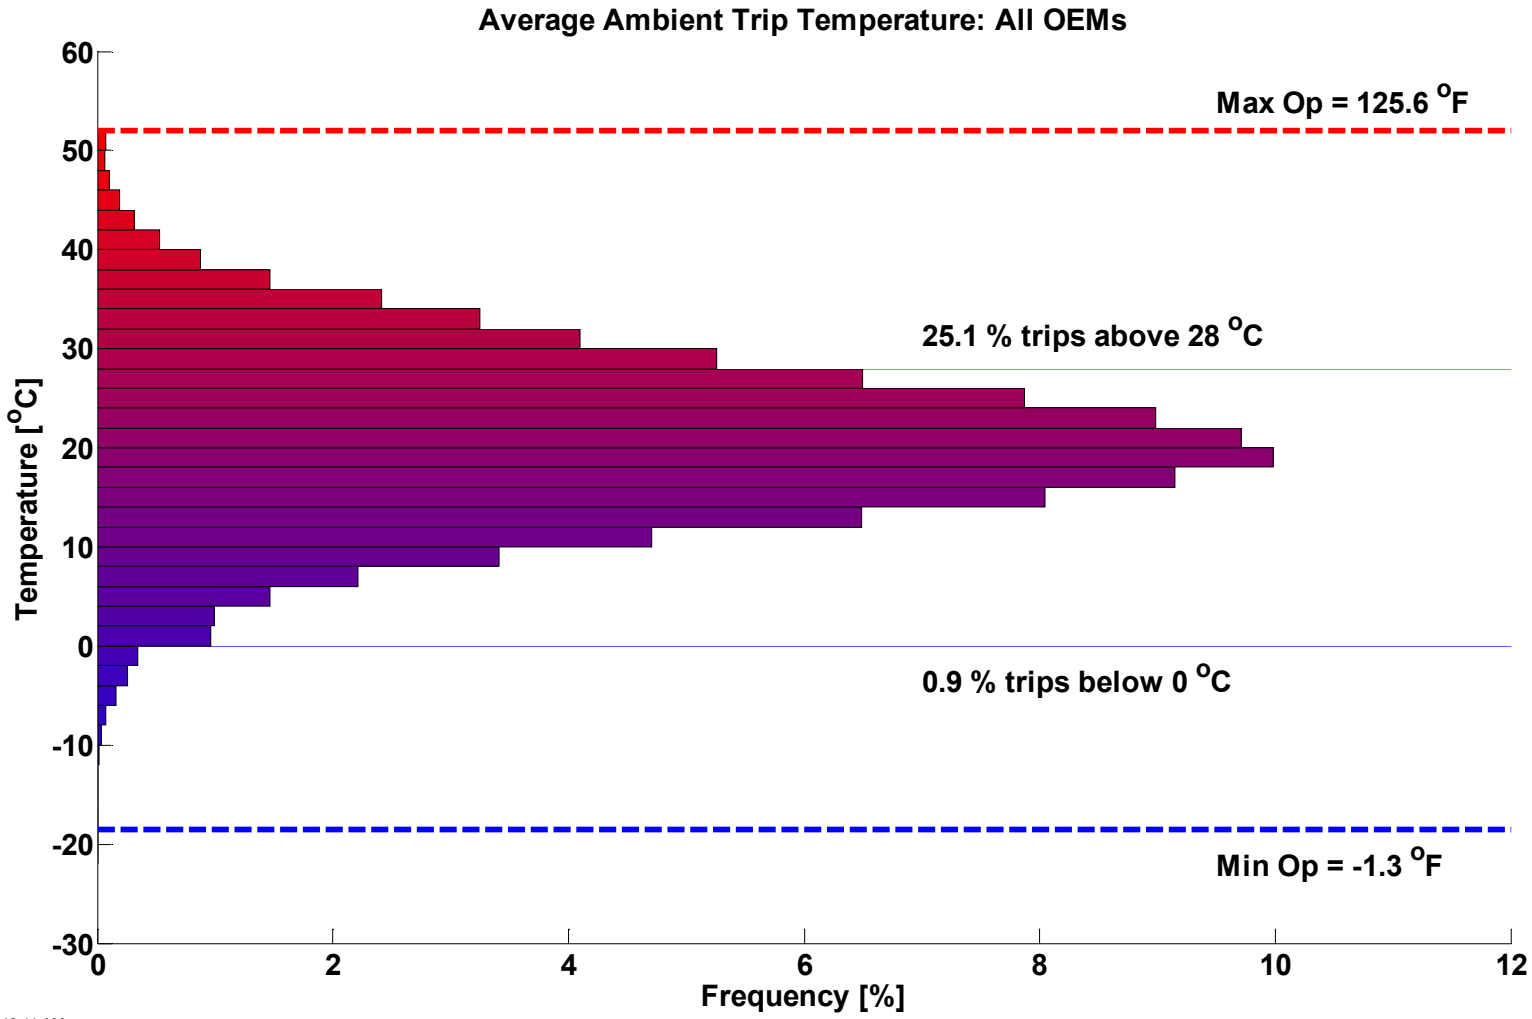

Created: Sep-03-08 10:41 AM

CDP#22: Vehicle Operating Hours


Vehicle Hours: All OEMs, Gen 1 and Gen 2
Through 2008 Q2

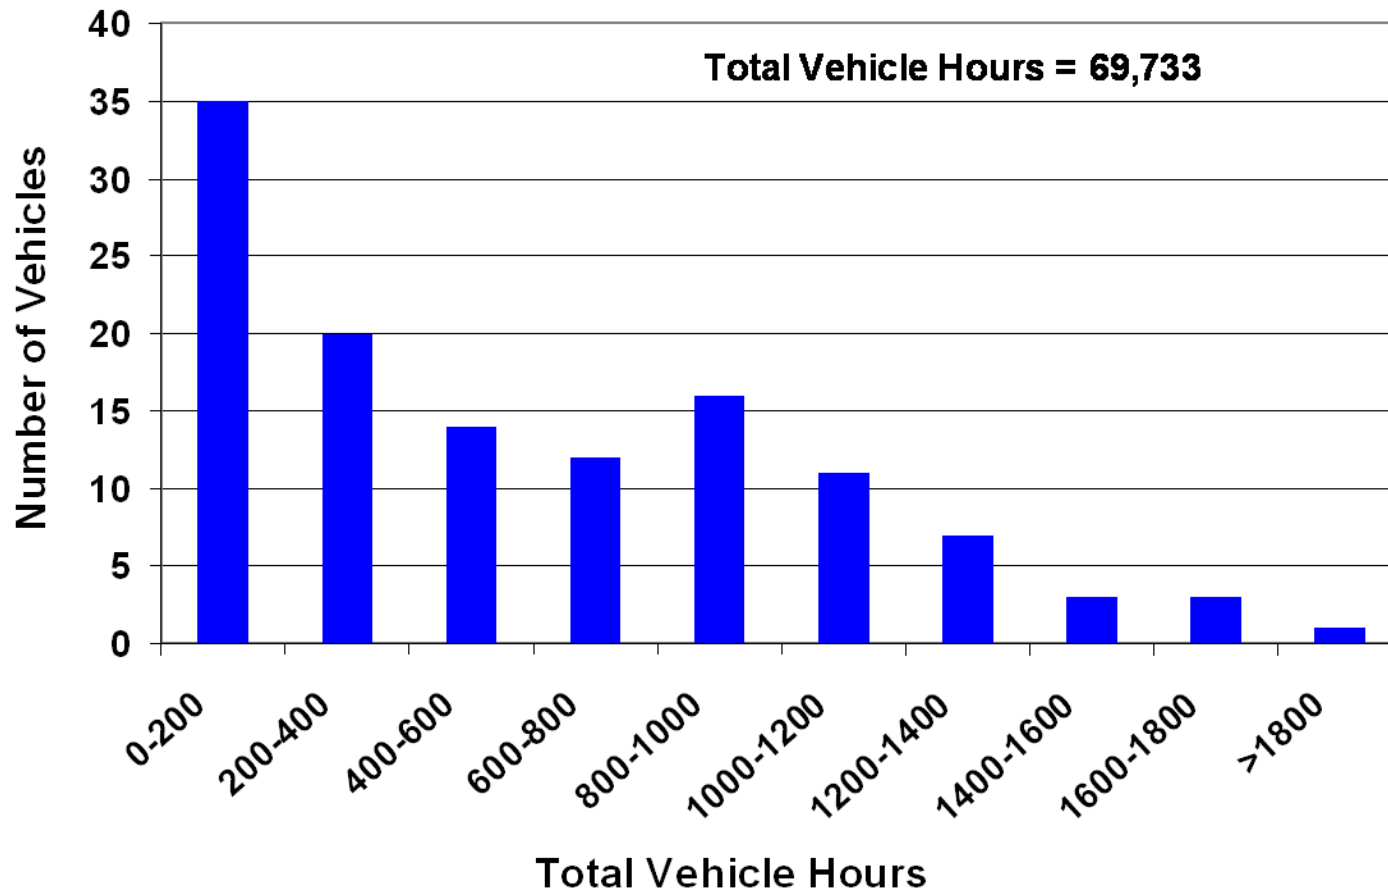

Created: Sep-22-08 02:00 PM

CDP#23: Vehicles vs. Miles Traveled


Vehicle Miles: All OEMs, Gen 1 and Gen 2
Through 2008 Q2

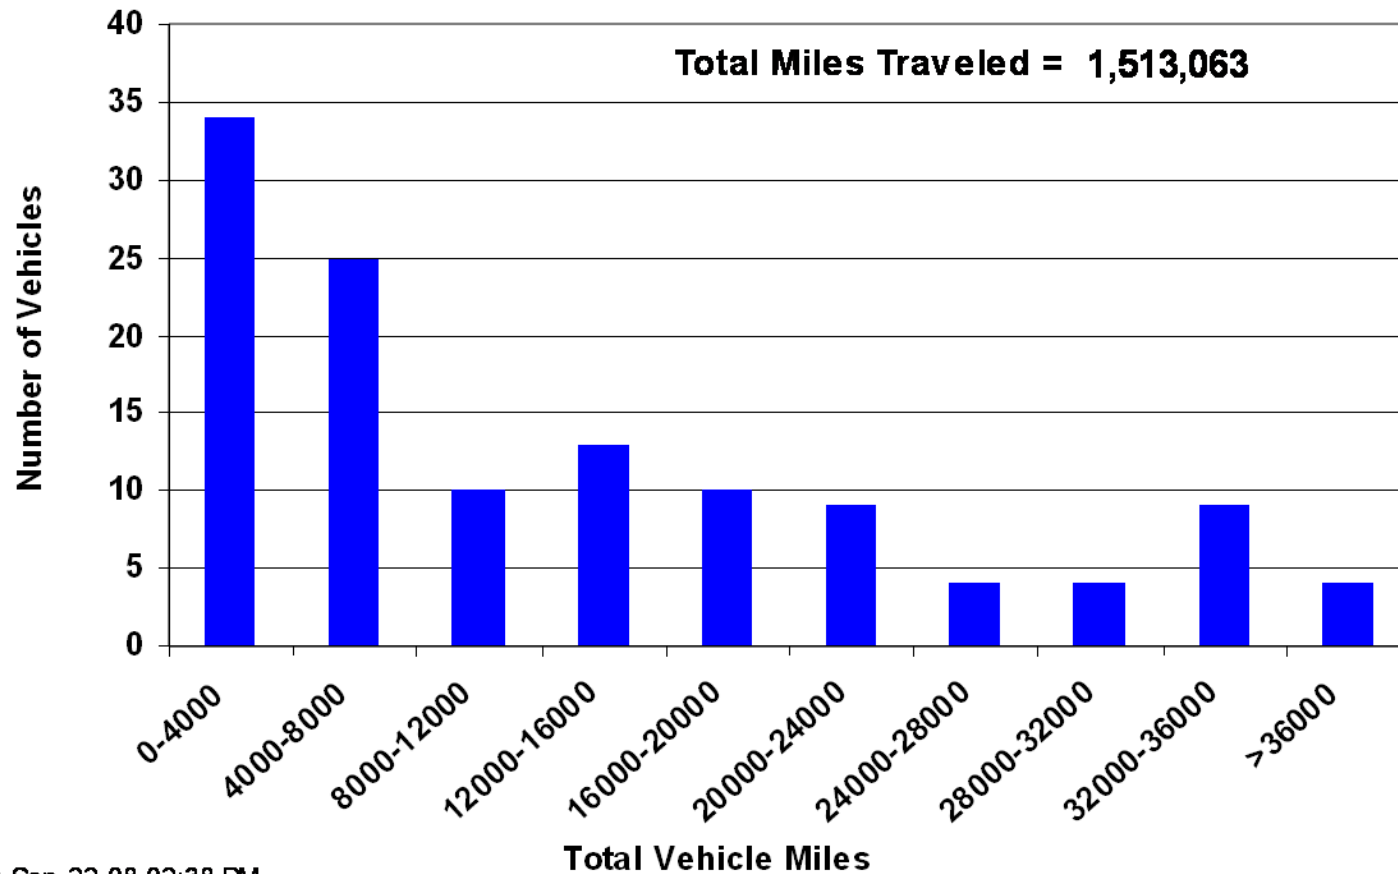

Created: Sep-22-08 02:38 PM


CDP#24: Cumulative Vehicle Miles Traveled

Cumulative Vehicle Miles: All OEMs, Gen 1 and Gen 2
Through 2008 Q2

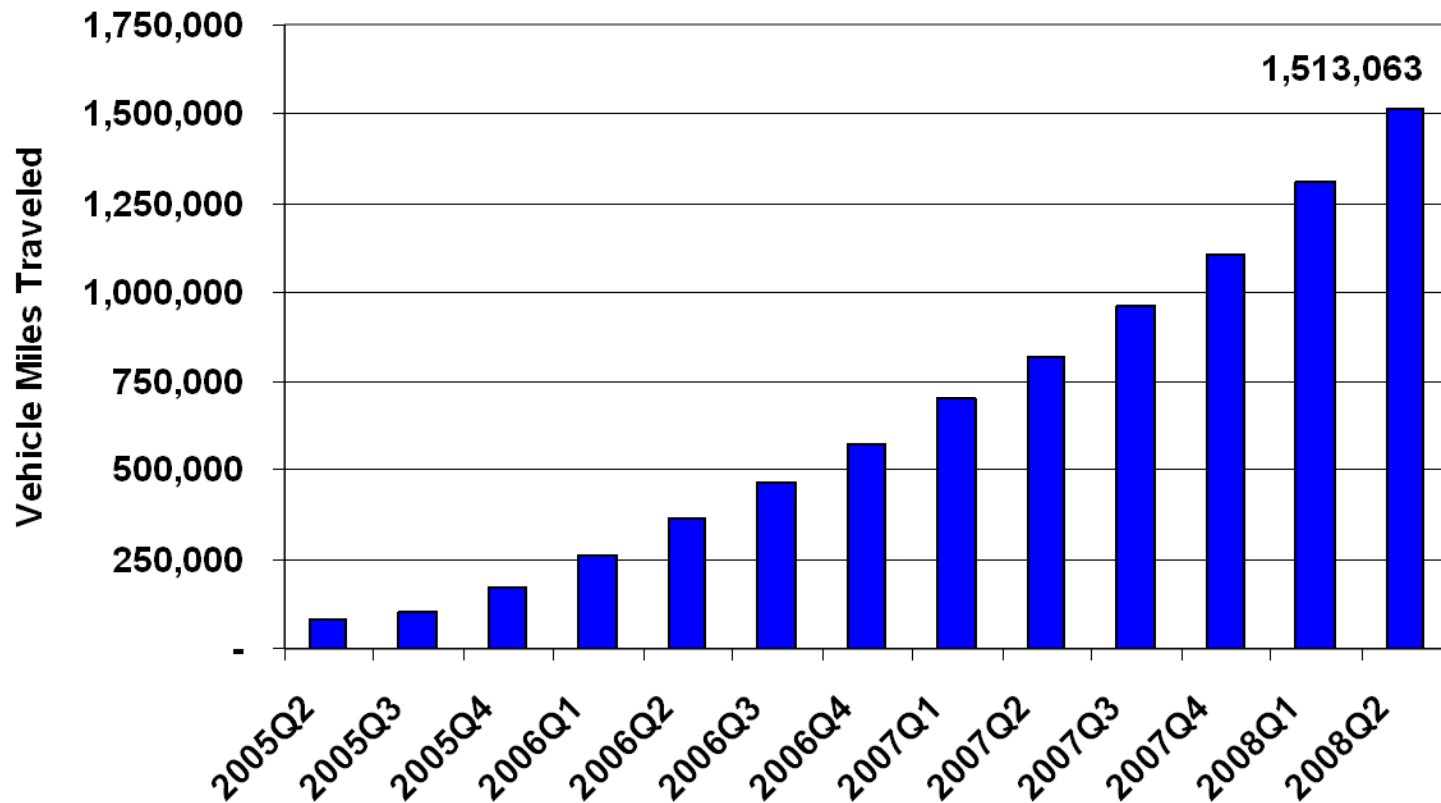

Created: Sep-22-08 02:00 PM

CDP#25: Vehicle H2 Storage Technologies

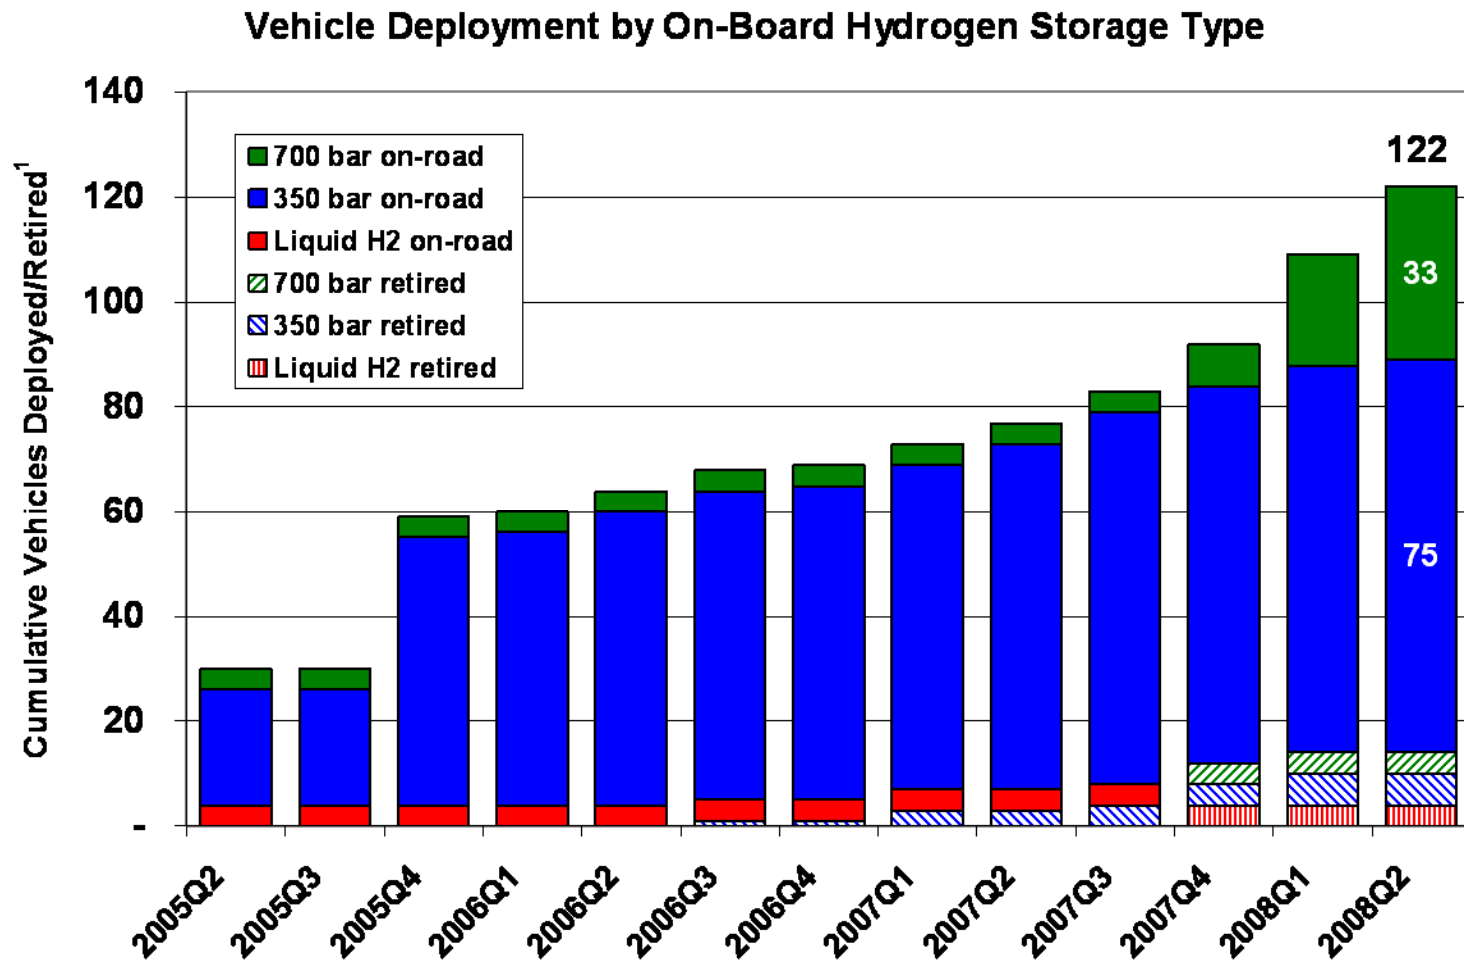


Created Sep-18-2008 8:20 AM

(1) Retired vehicles have left DOE fleet and are no longer providing data to NREL


CDP#26: Cumulative H2 Produced or Dispensed

Cumulative Hydrogen Produced or Dispensed Through 2008 Q2

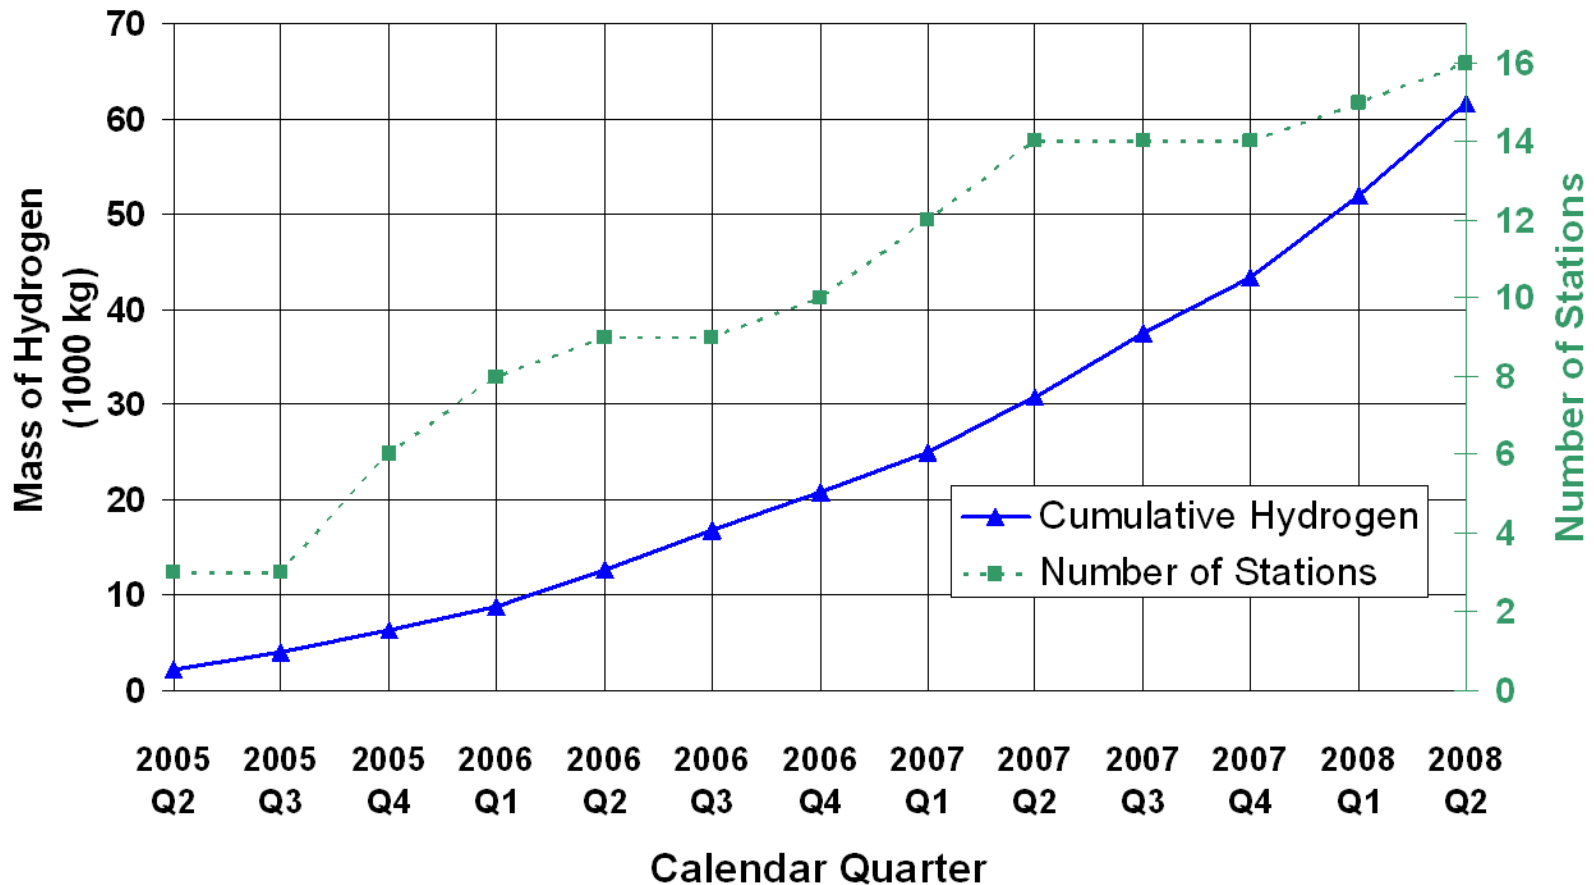

Created 2008-Sep-04-3:41pm

CDP#27: Hydrogen Quality Index

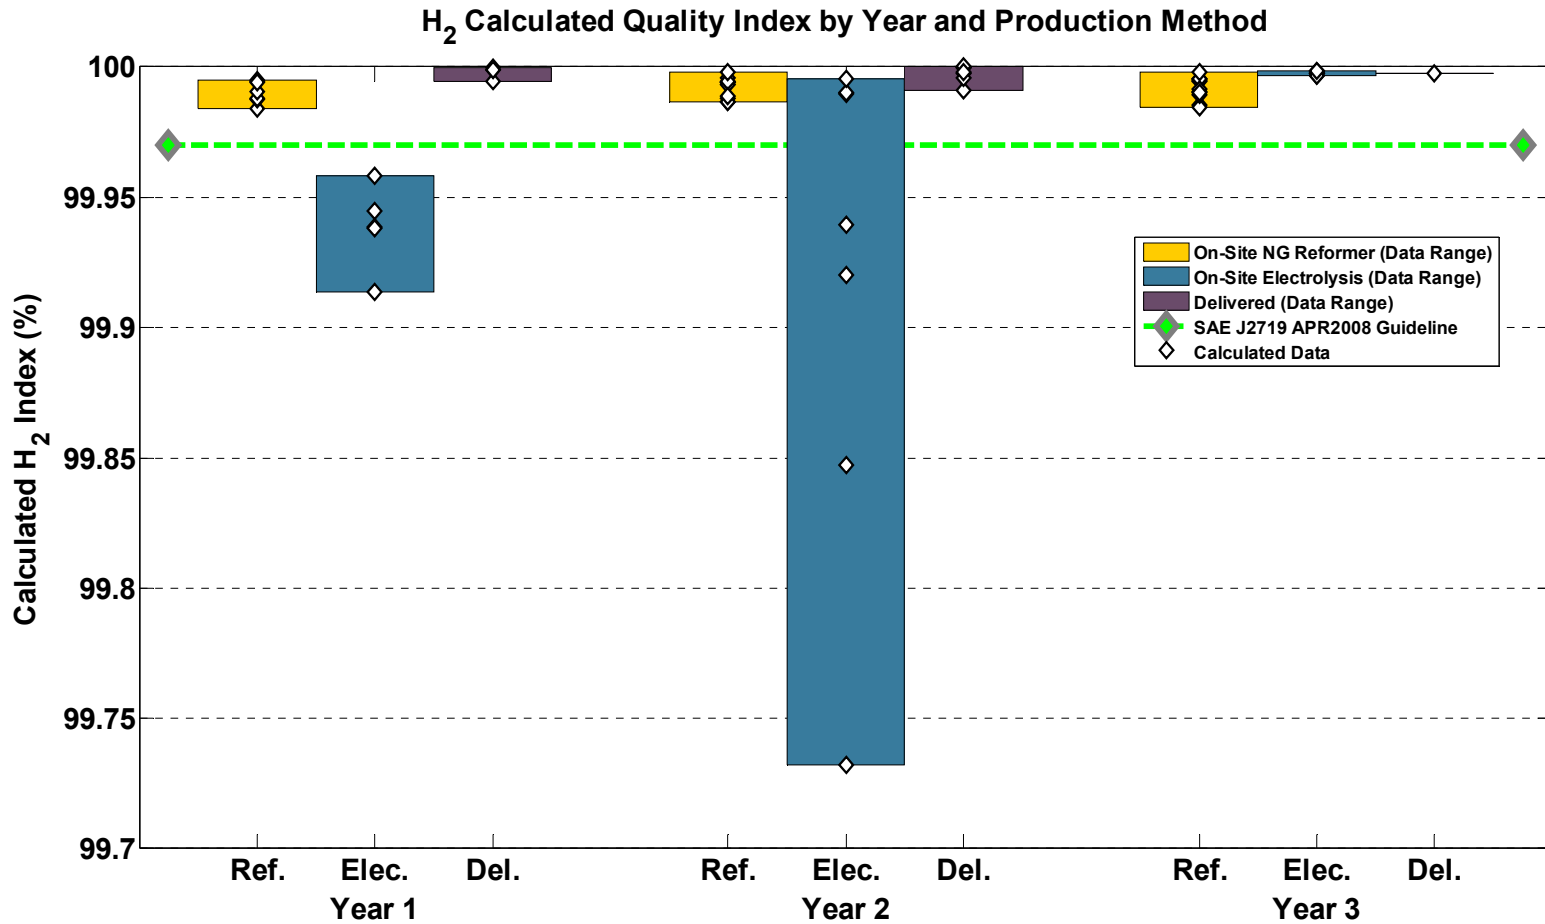


Data is from Learning Demonstration and California Fuel Cell Partnership testing
 Year 1 is 2005Q3-2006Q2, Year 2 is 2006Q3-2007Q2, and Year 3 is 2007Q3-2008Q2

Created: Sep-22-08 1:41 PM

CDP #28: Hydrogen Impurities

H₂ Impurities

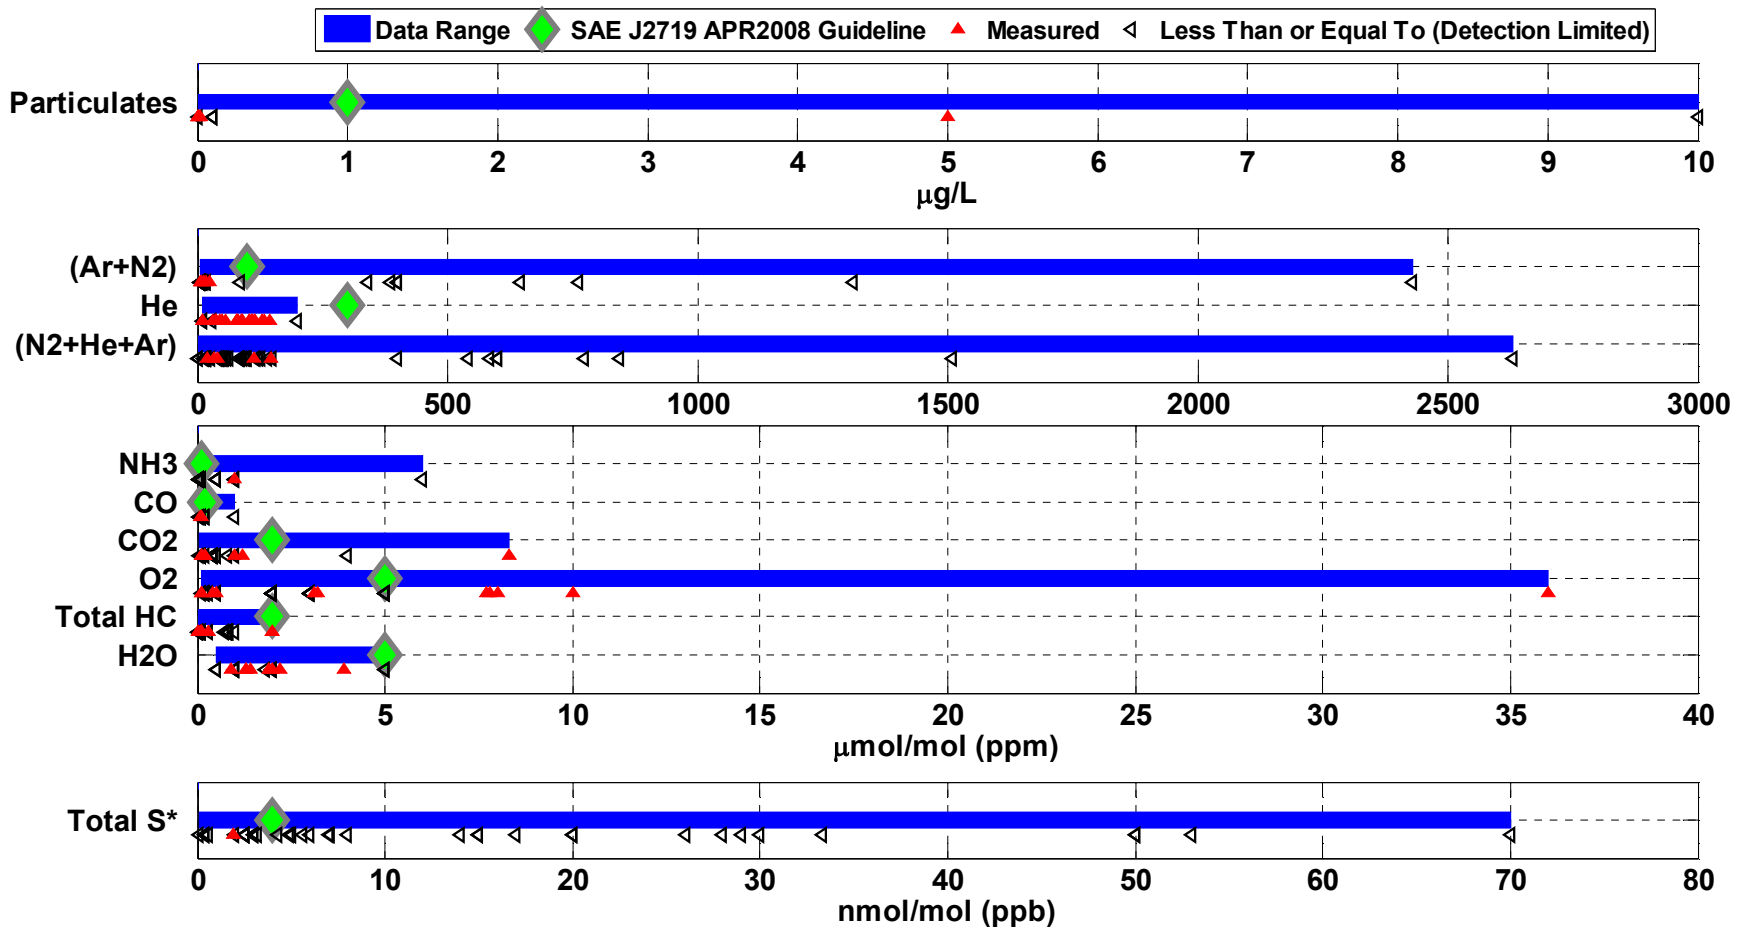


Created: Sep-22-08 1:41 PM

Data is from Learning Demonstration and California Fuel Cell Partnership testing

*Total S calculated from SO₂, COS, H₂S, CS₂, and Methyl Mercaptan (CH₃SH).


CDP#28 Supplemental: Hydrogen Impurities by Year and Production Method

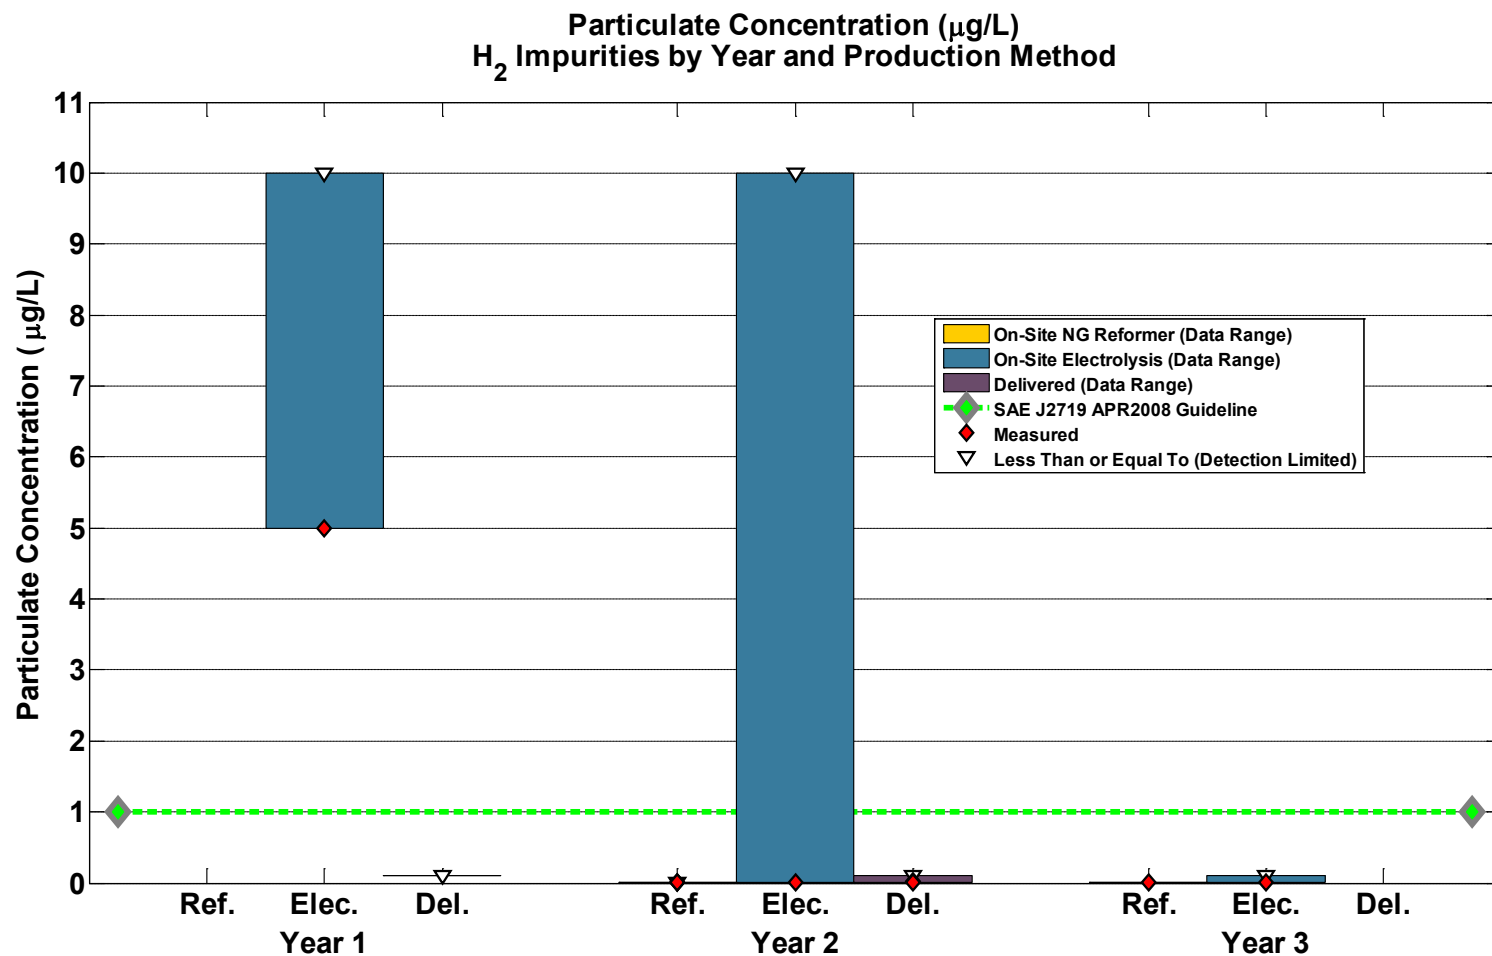

Data is from Learning Demonstration and California Fuel Cell Partnership testing
Year 1 is 2005Q3-2006Q2, Year 2 is 2006Q3-2007Q2, and Year 3 is 2007Q3-2008Q2

Created: Sep-22-08 1:42 PM


CDP#28 Supplemental: Hydrogen Impurities by Year and Production Method

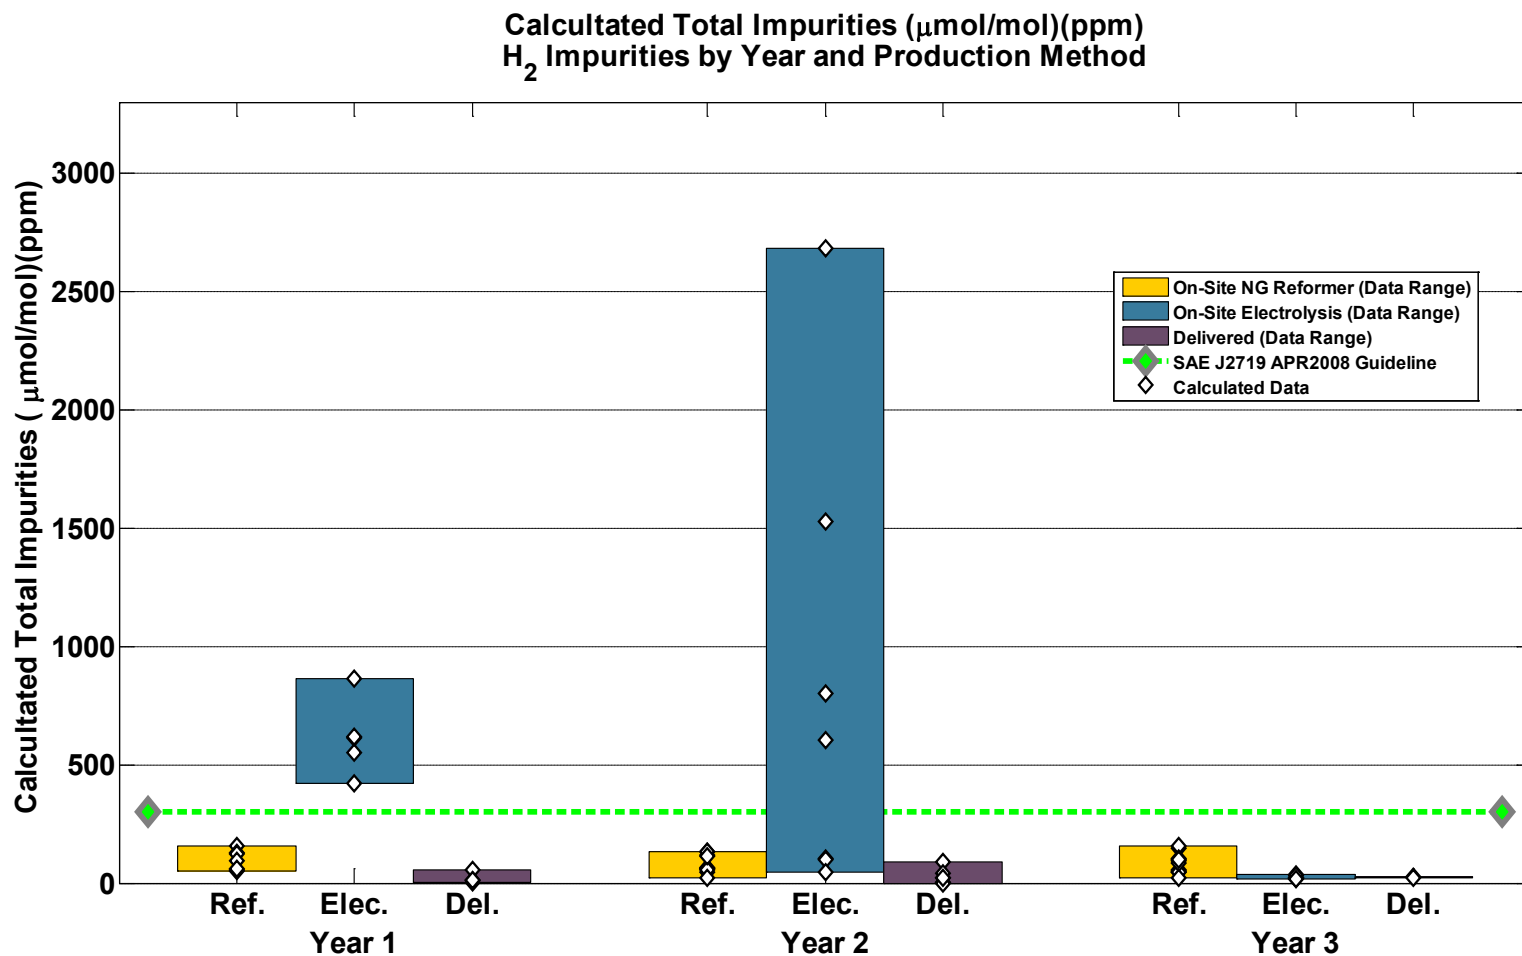

Data is from Learning Demonstration and California Fuel Cell Partnership testing
 Year 1 is 2005Q3-2006Q2, Year 2 is 2006Q3-2007Q2, and Year 3 is 2007Q3-2008Q2

Created: Sep-22-08 1:41 PM


CDP#28 Supplemental: Hydrogen Impurities by Year and Production Method

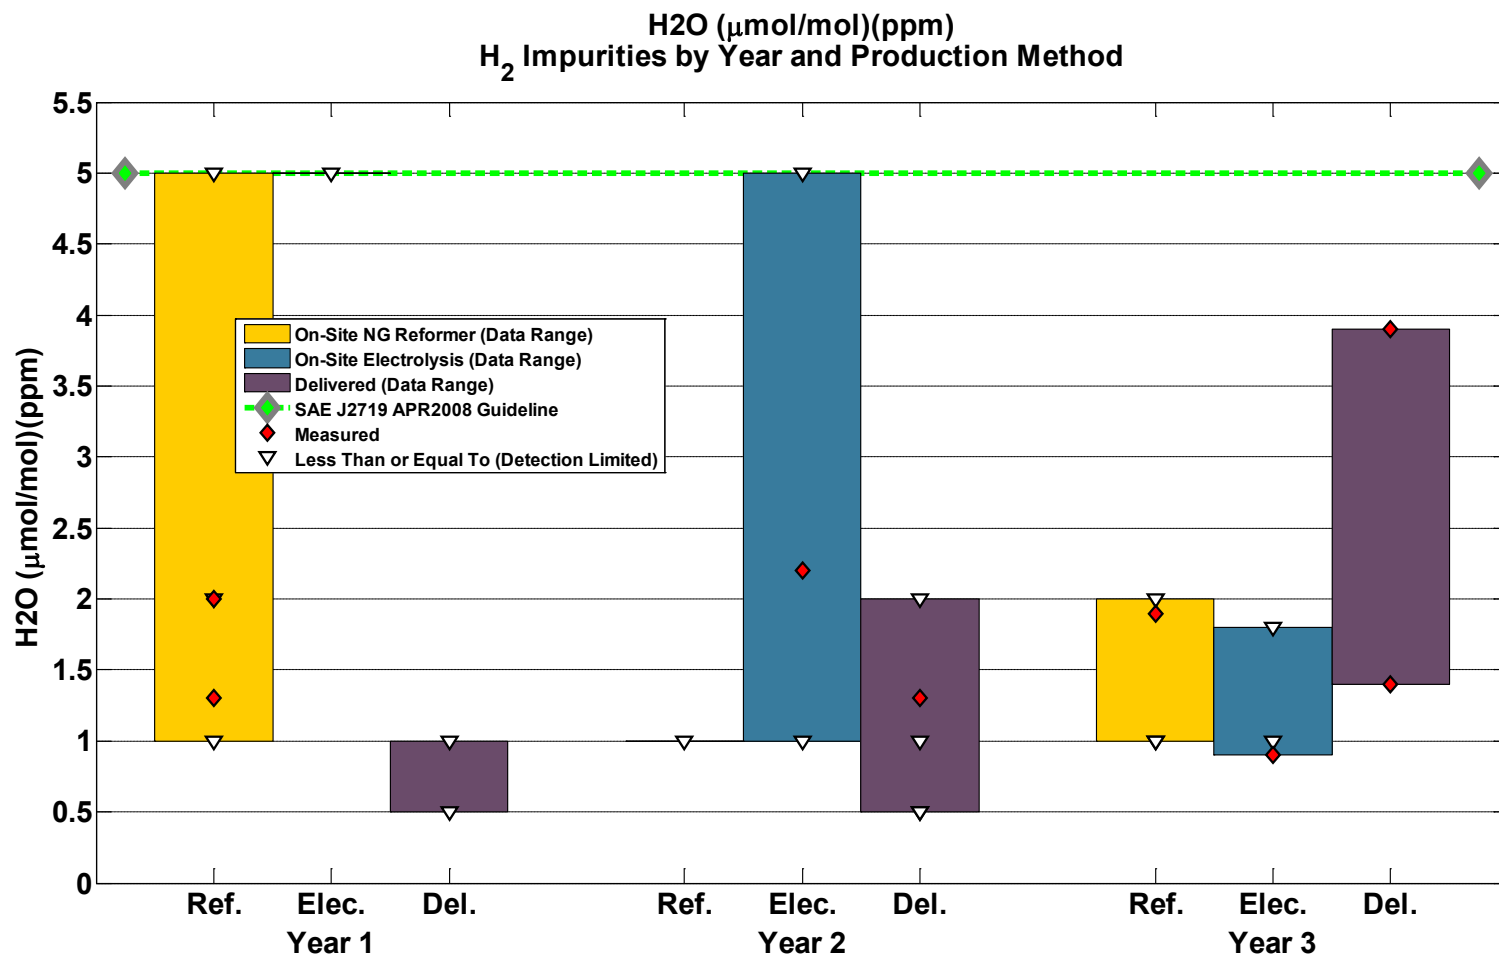

Data is from Learning Demonstration and California Fuel Cell Partnership testing
 Year 1 is 2005Q3-2006Q2, Year 2 is 2006Q3-2007Q2, and Year 3 is 2007Q3-2008Q2

Created: Sep-22-08 1:41 PM


CDP#28 Supplemental: Hydrogen Impurities by Year and Production Method

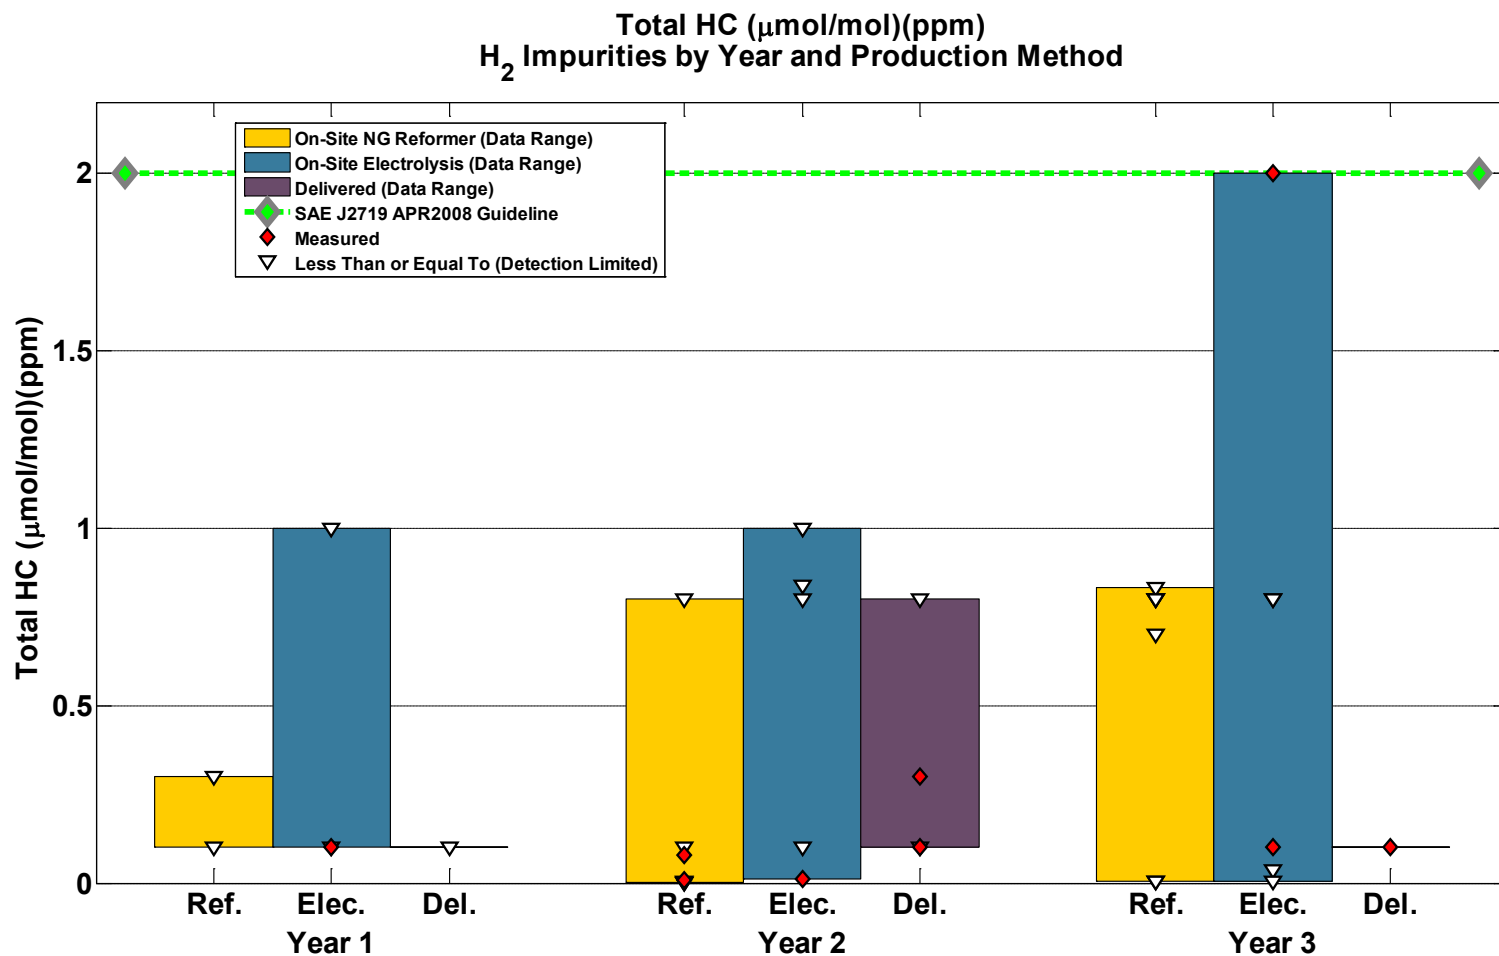

Data is from Learning Demonstration and California Fuel Cell Partnership testing
Year 1 is 2005Q3-2006Q2, Year 2 is 2006Q3-2007Q2, and Year 3 is 2007Q3-2008Q2

Created: Sep-22-08 1:41 PM


CDP#28 Supplemental: Hydrogen Impurities by Year and Production Method

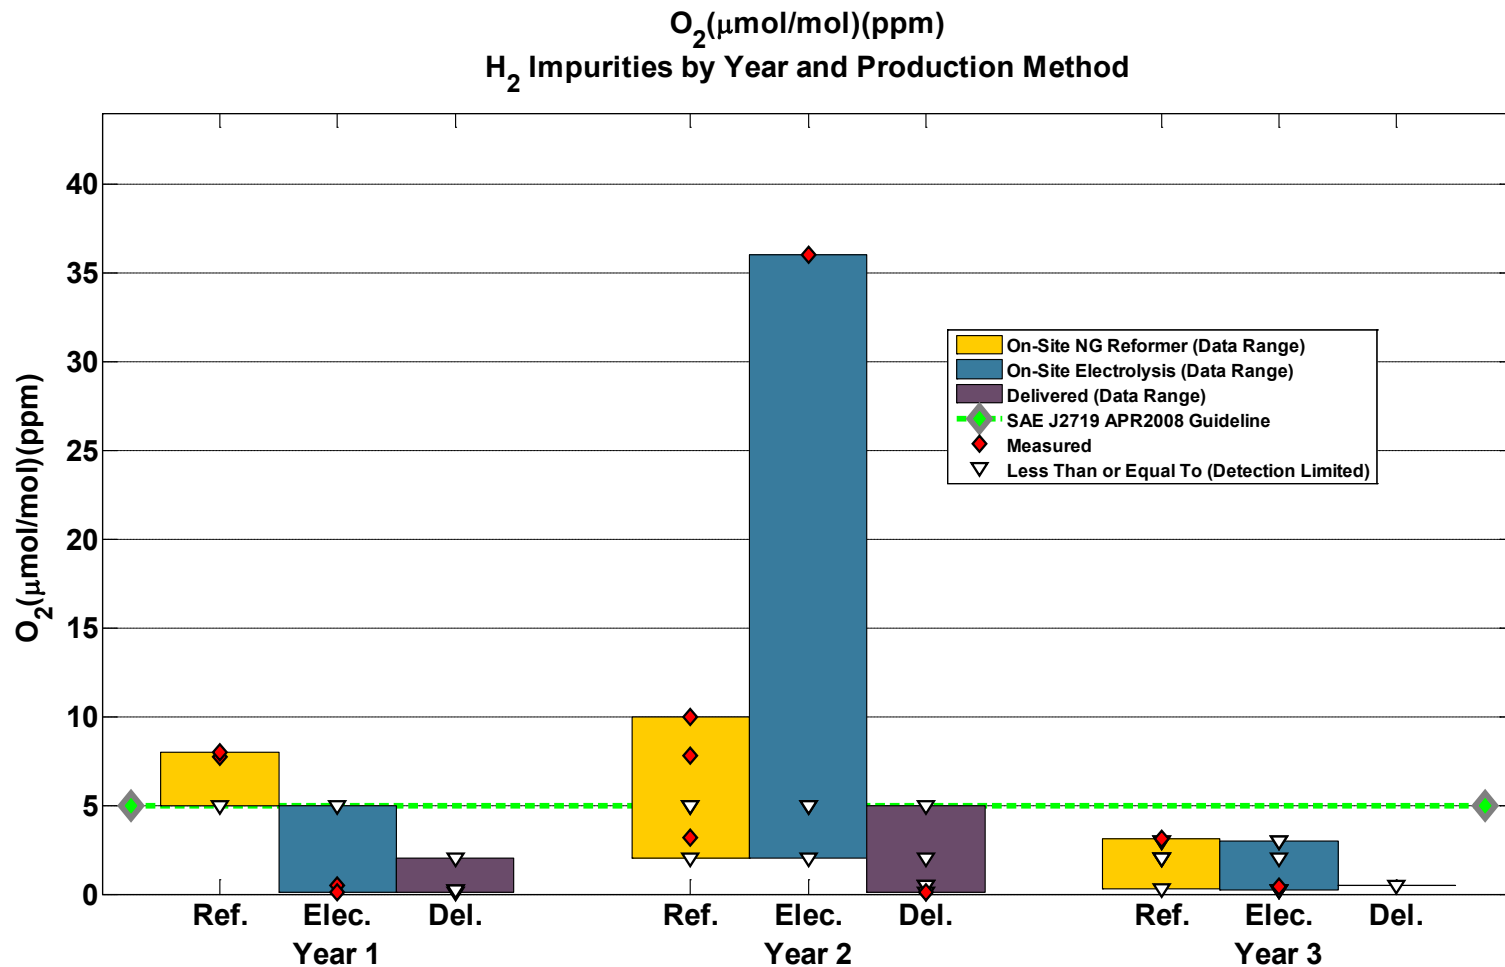

Data is from Learning Demonstration and California Fuel Cell Partnership testing
 Year 1 is 2005Q3-2006Q2, Year 2 is 2006Q3-2007Q2, and Year 3 is 2007Q3-2008Q2

Created: Sep-22-08 1:41 PM


CDP#28 Supplemental: Hydrogen Impurities by Year and Production Method

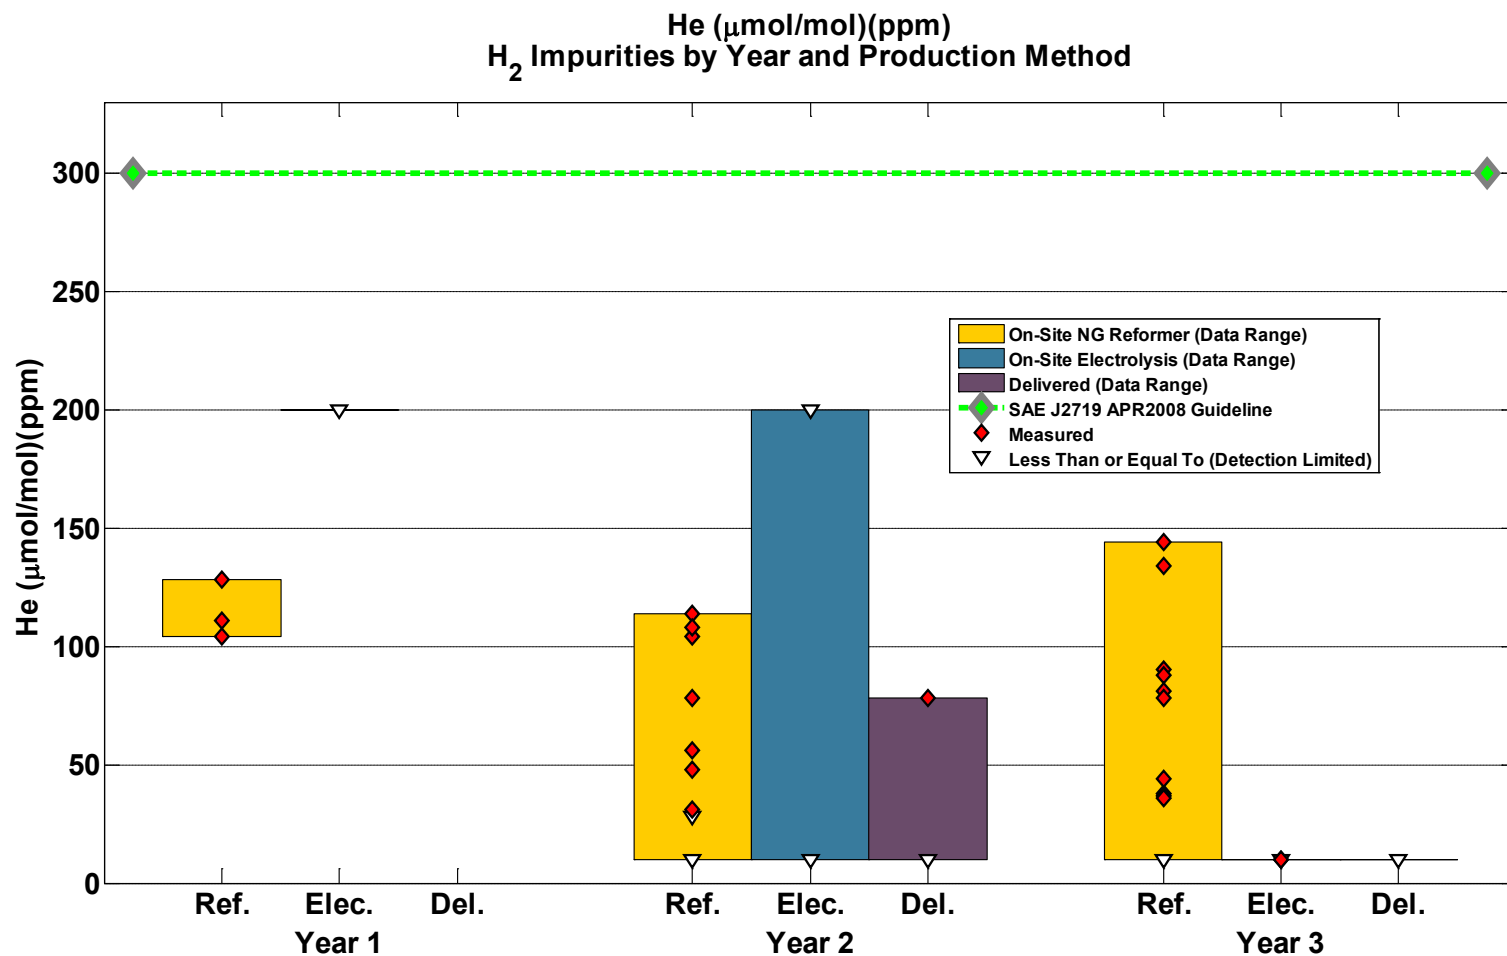

Data is from Learning Demonstration and California Fuel Cell Partnership testing
Year 1 is 2005Q3-2006Q2, Year 2 is 2006Q3-2007Q2, and Year 3 is 2007Q3-2008Q2

Created: Sep-22-08 1:41 PM


CDP#28 Supplemental: Hydrogen Impurities by Year and Production Method

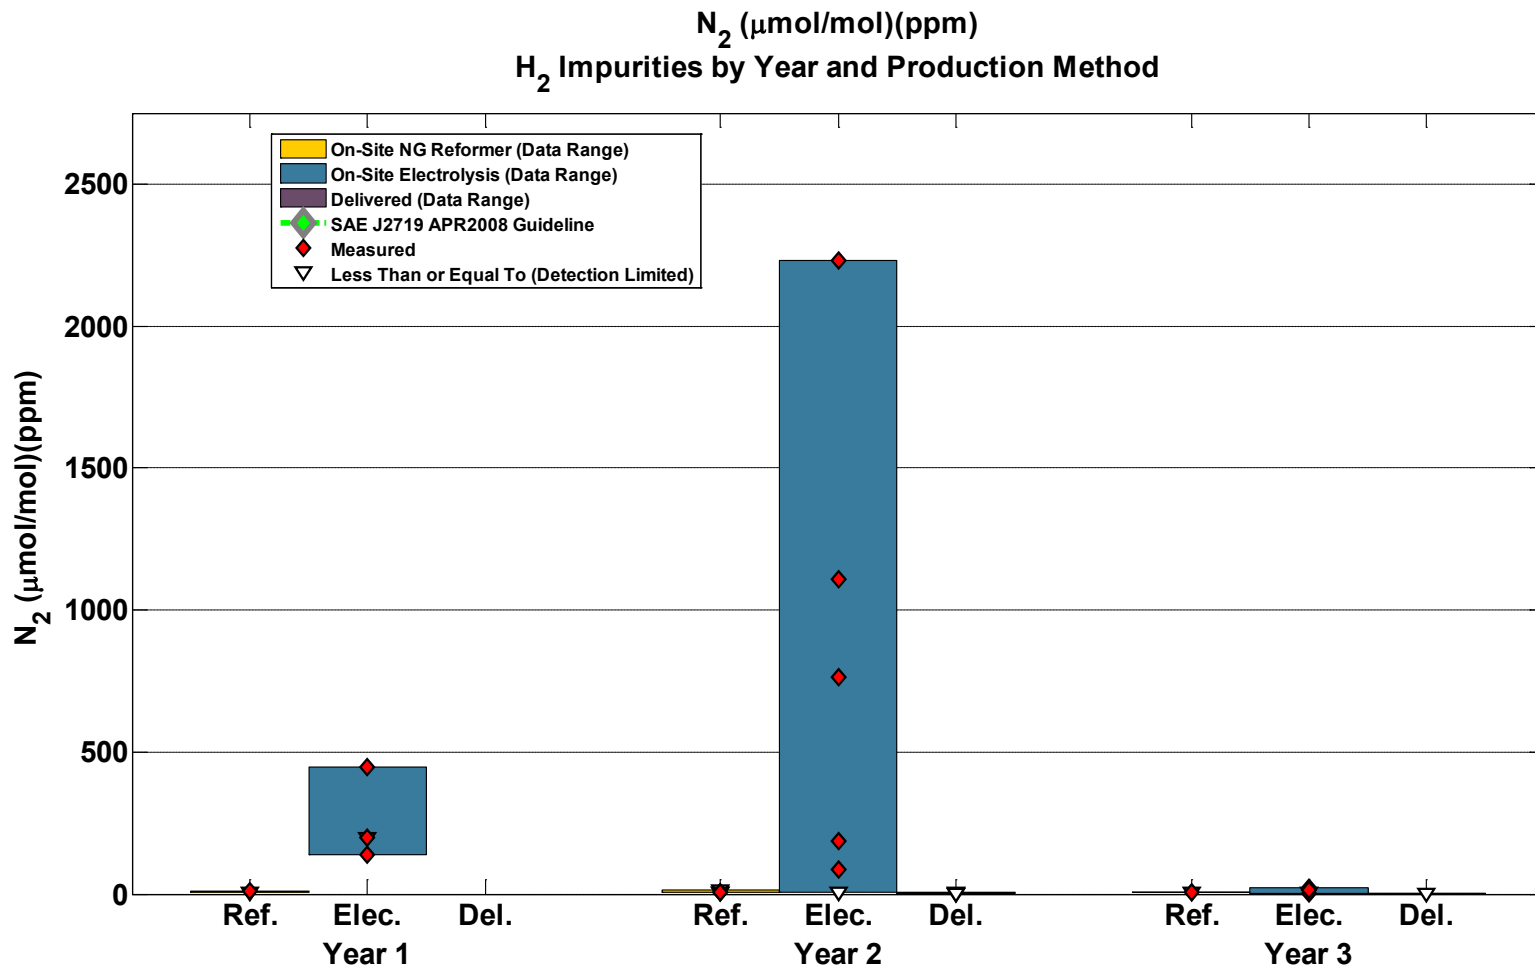

Data is from Learning Demonstration and California Fuel Cell Partnership testing
 Year 1 is 2005Q3-2006Q2, Year 2 is 2006Q3-2007Q2, and Year 3 is 2007Q3-2008Q2

Created: Sep-22-08 1:42 PM


CDP#28 Supplemental: Hydrogen Impurities by Year and Production Method

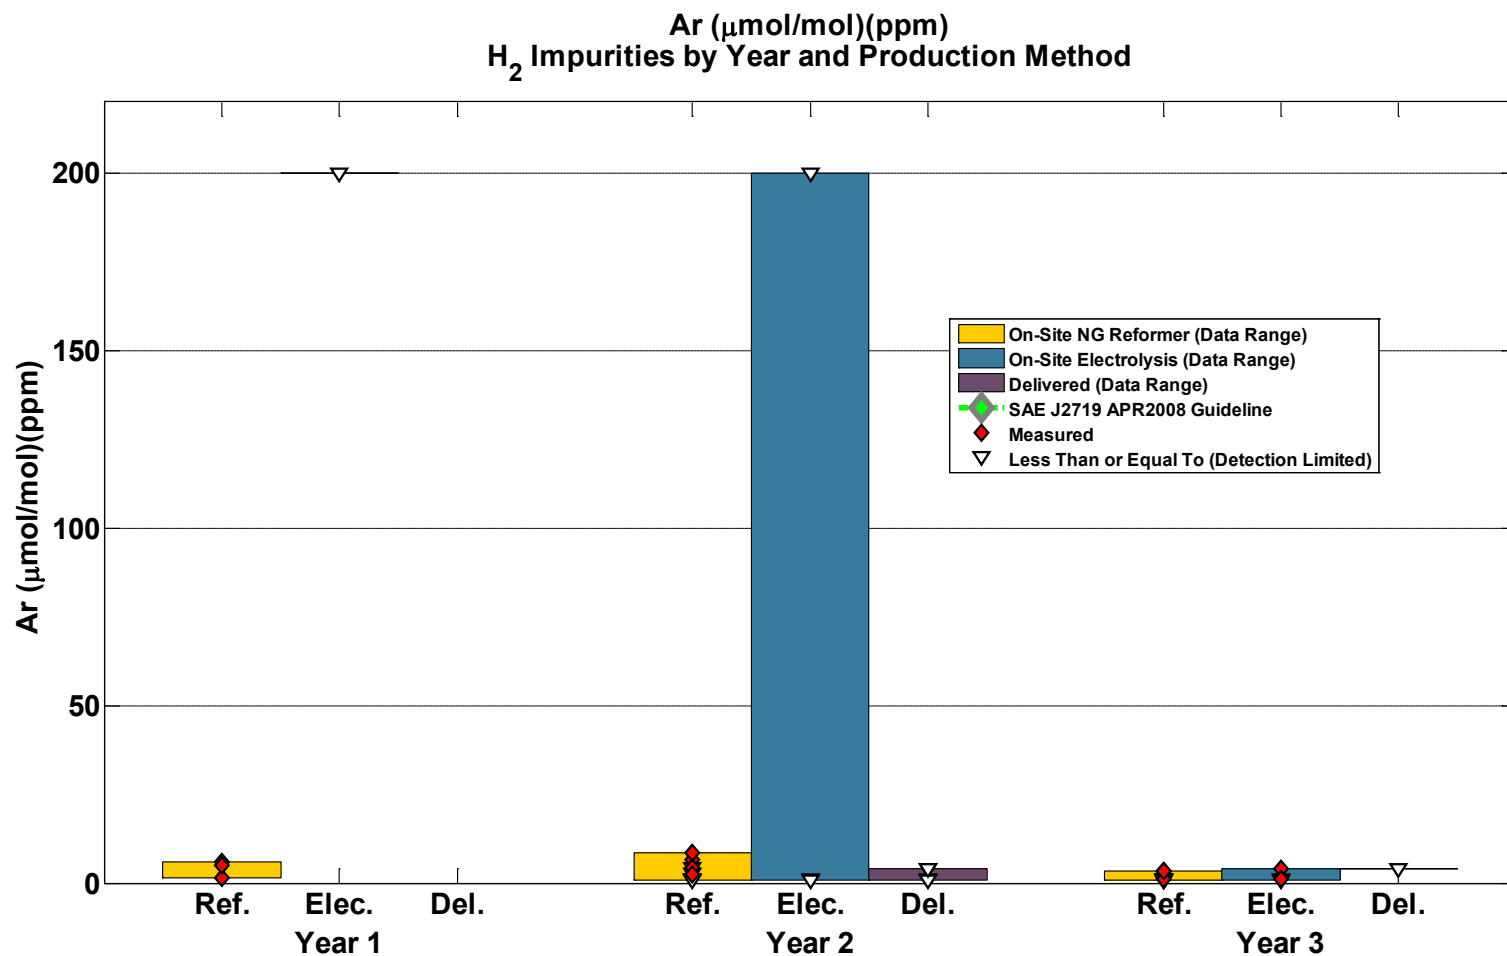

Data is from Learning Demonstration and California Fuel Cell Partnership testing
 Year 1 is 2005Q3-2006Q2, Year 2 is 2006Q3-2007Q2, and Year 3 is 2007Q3-2008Q2

Created: Sep-22-08 1:42 PM


CDP#28 Supplemental: Hydrogen Impurities by Year and Production Method

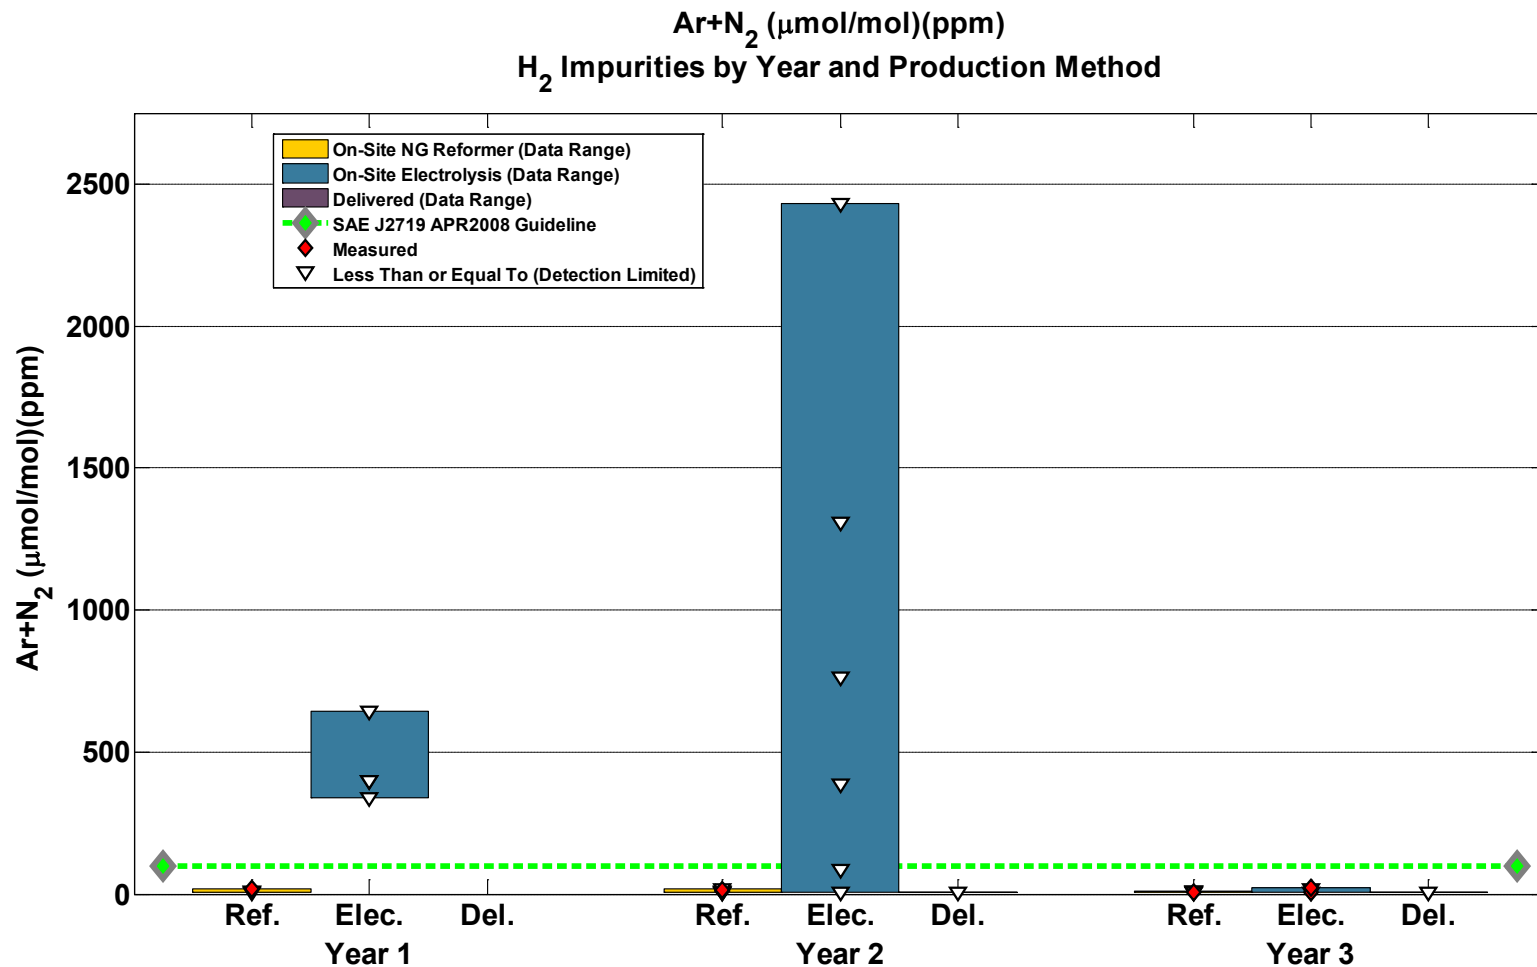

Data is from Learning Demonstration and California Fuel Cell Partnership testing
 Year 1 is 2005Q3-2006Q2, Year 2 is 2006Q3-2007Q2, and Year 3 is 2007Q3-2008Q2

Created: Sep-22-08 1:42 PM


CDP#28 Supplemental: Hydrogen Impurities by Year and Production Method

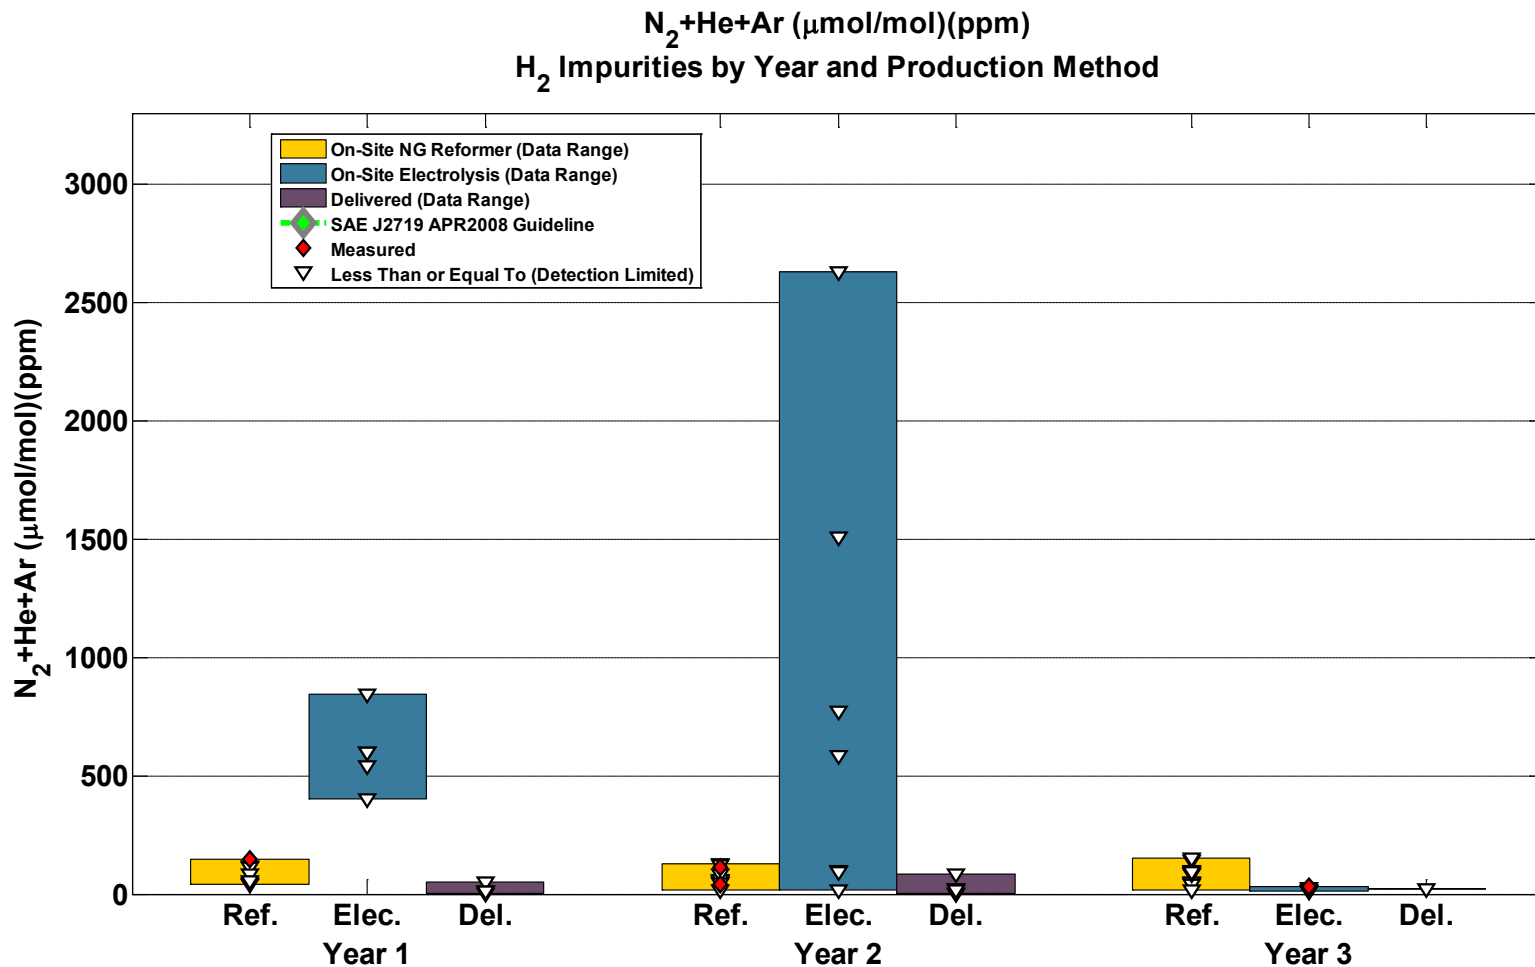

Data is from Learning Demonstration and California Fuel Cell Partnership testing
Year 1 is 2005Q3-2006Q2, Year 2 is 2006Q3-2007Q2, and Year 3 is 2007Q3-2008Q2

Created: Sep-22-08 1:42 PM


CDP#28 Supplemental: Hydrogen Impurities by Year and Production Method

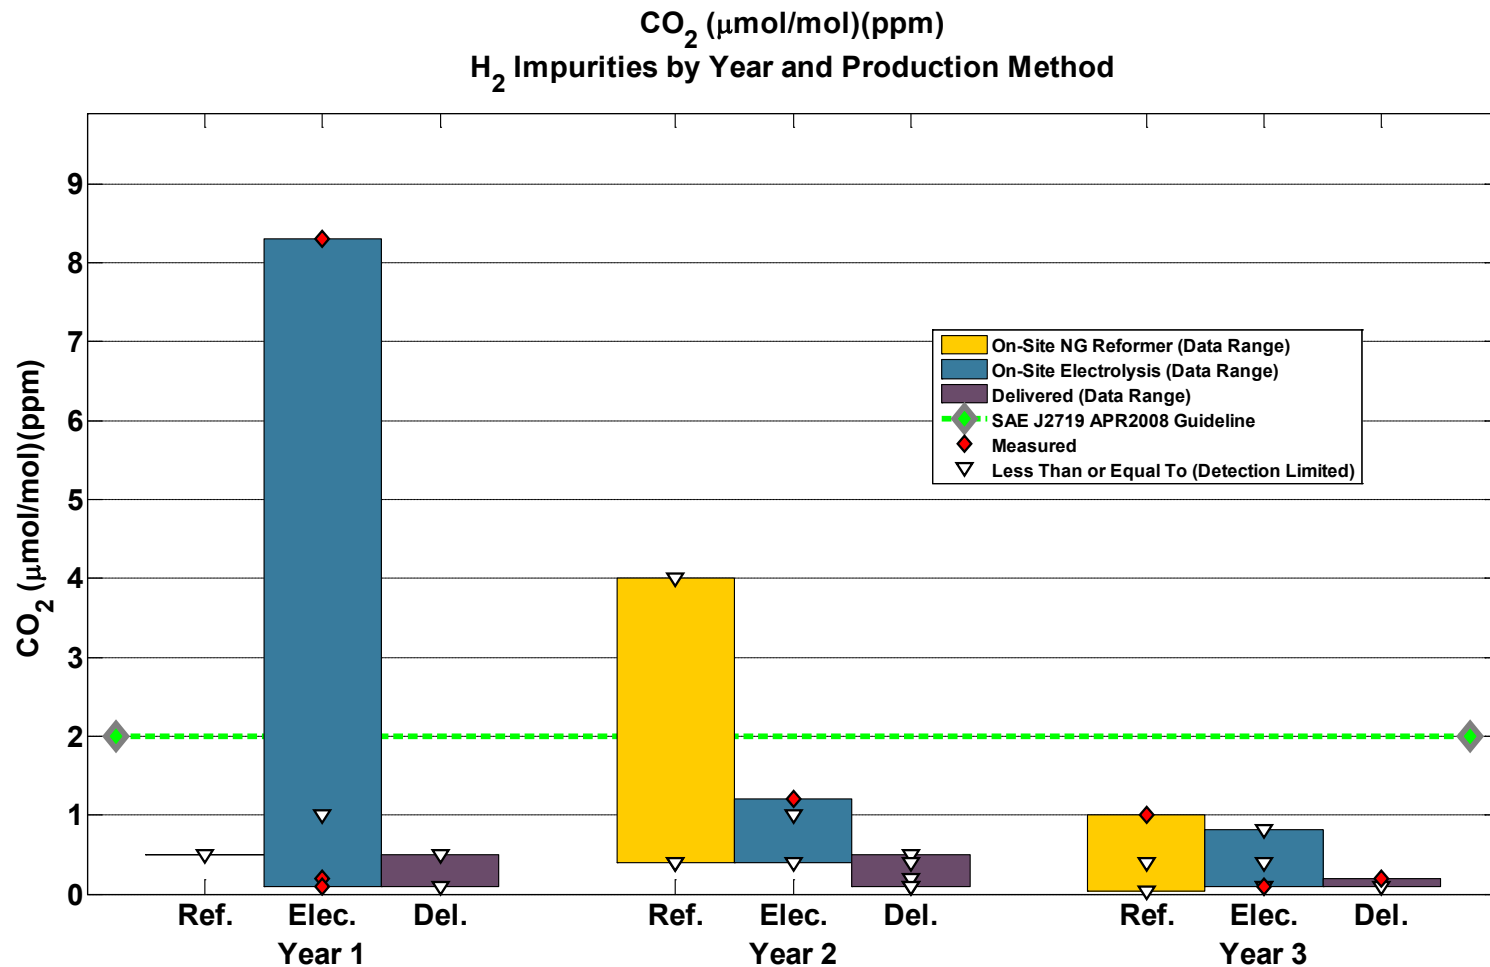

Data is from Learning Demonstration and California Fuel Cell Partnership testing
Year 1 is 2005Q3-2006Q2, Year 2 is 2006Q3-2007Q2, and Year 3 is 2007Q3-2008Q2

Created: Sep-22-08 1:42 PM


CDP#28 Supplemental: Hydrogen Impurities by Year and Production Method

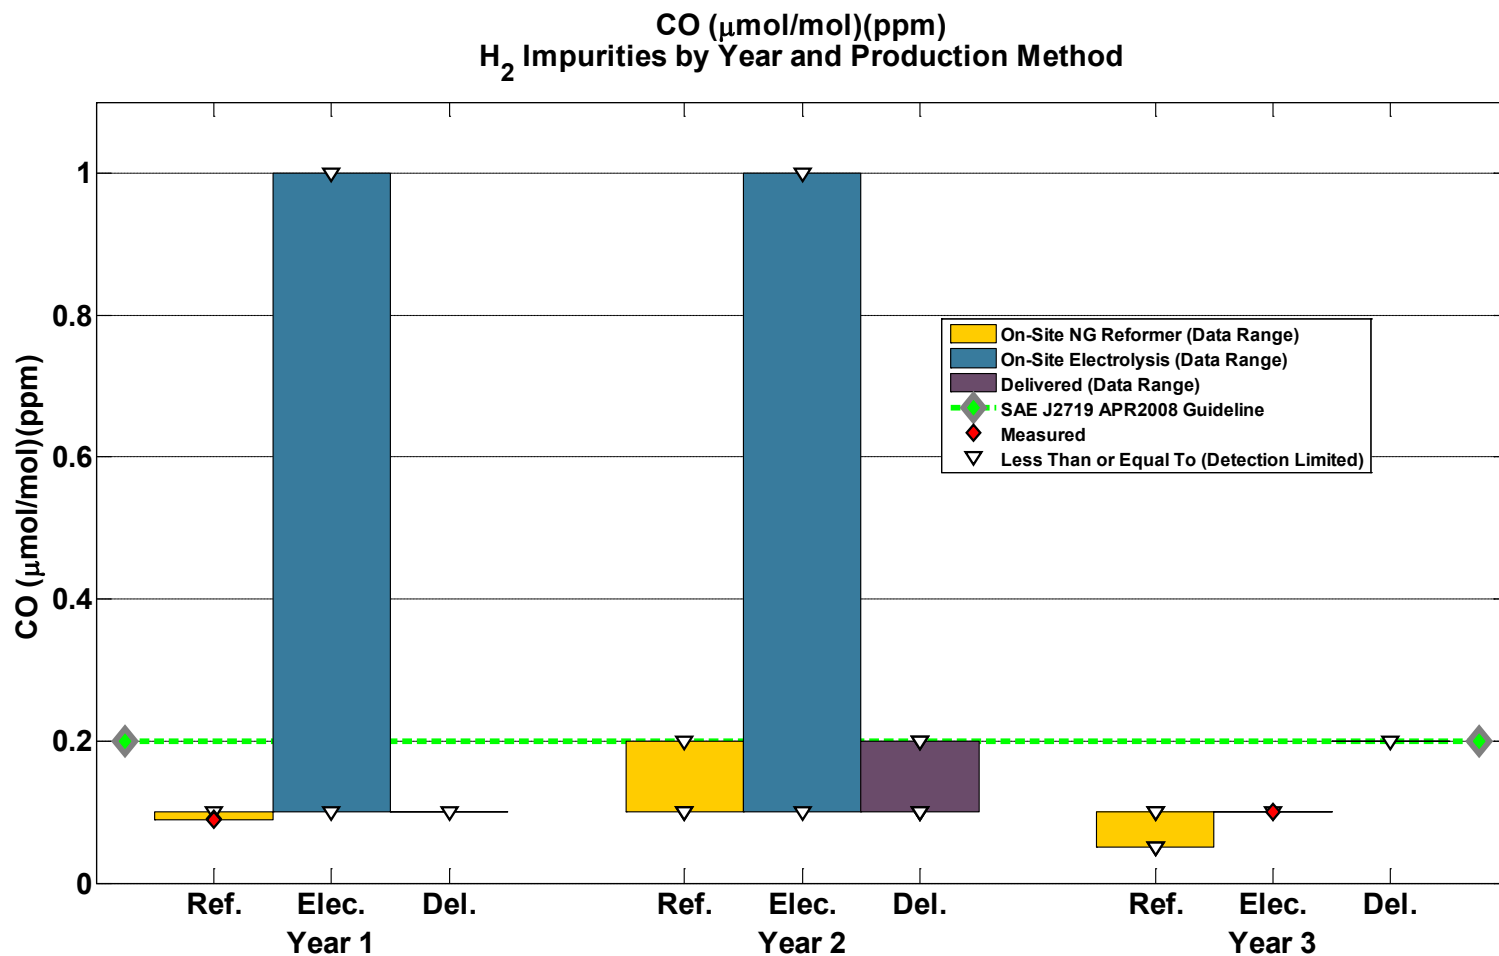

Data is from Learning Demonstration and California Fuel Cell Partnership testing
Year 1 is 2005Q3-2006Q2, Year 2 is 2006Q3-2007Q2, and Year 3 is 2007Q3-2008Q2

Created: Sep-22-08 1:42 PM


CDP#28 Supplemental: Hydrogen Impurities by Year and Production Method

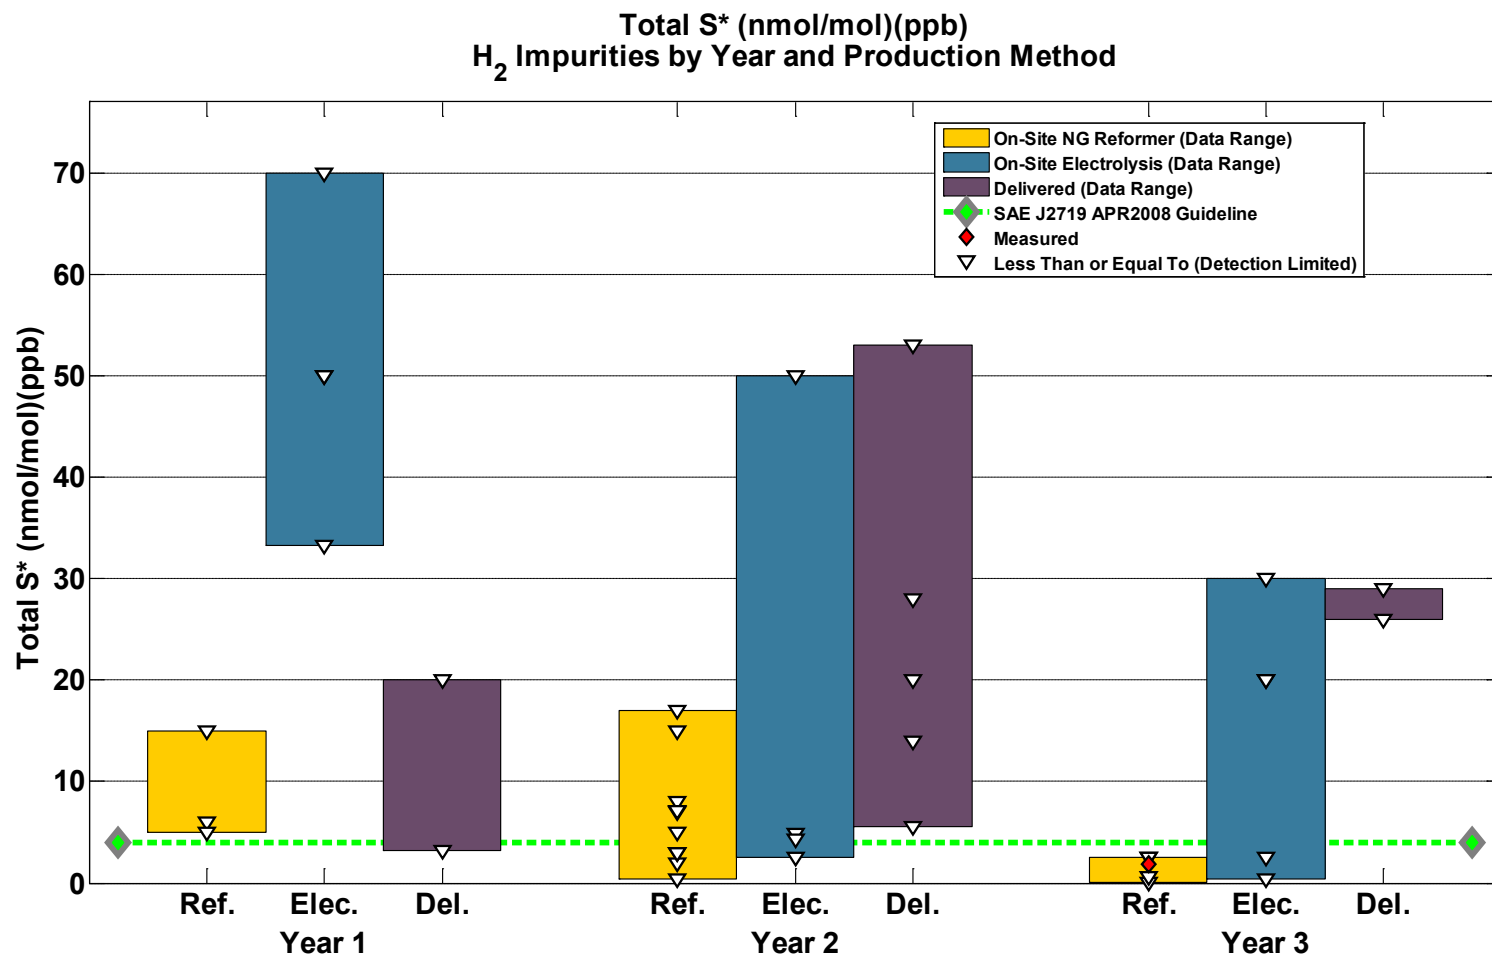

Data is from Learning Demonstration and California Fuel Cell Partnership testing
 Year 1 is 2005Q3-2006Q2, Year 2 is 2006Q3-2007Q2, and Year 3 is 2007Q3-2008Q2
 *Total S calculated from SO₂, COS, H₂S, CS₂, and Methyl Mercaptan (CH₃SH).

Created: Sep-22-08 1:42 PM


CDP#28 Supplemental: Hydrogen Impurities by Year and Production Method

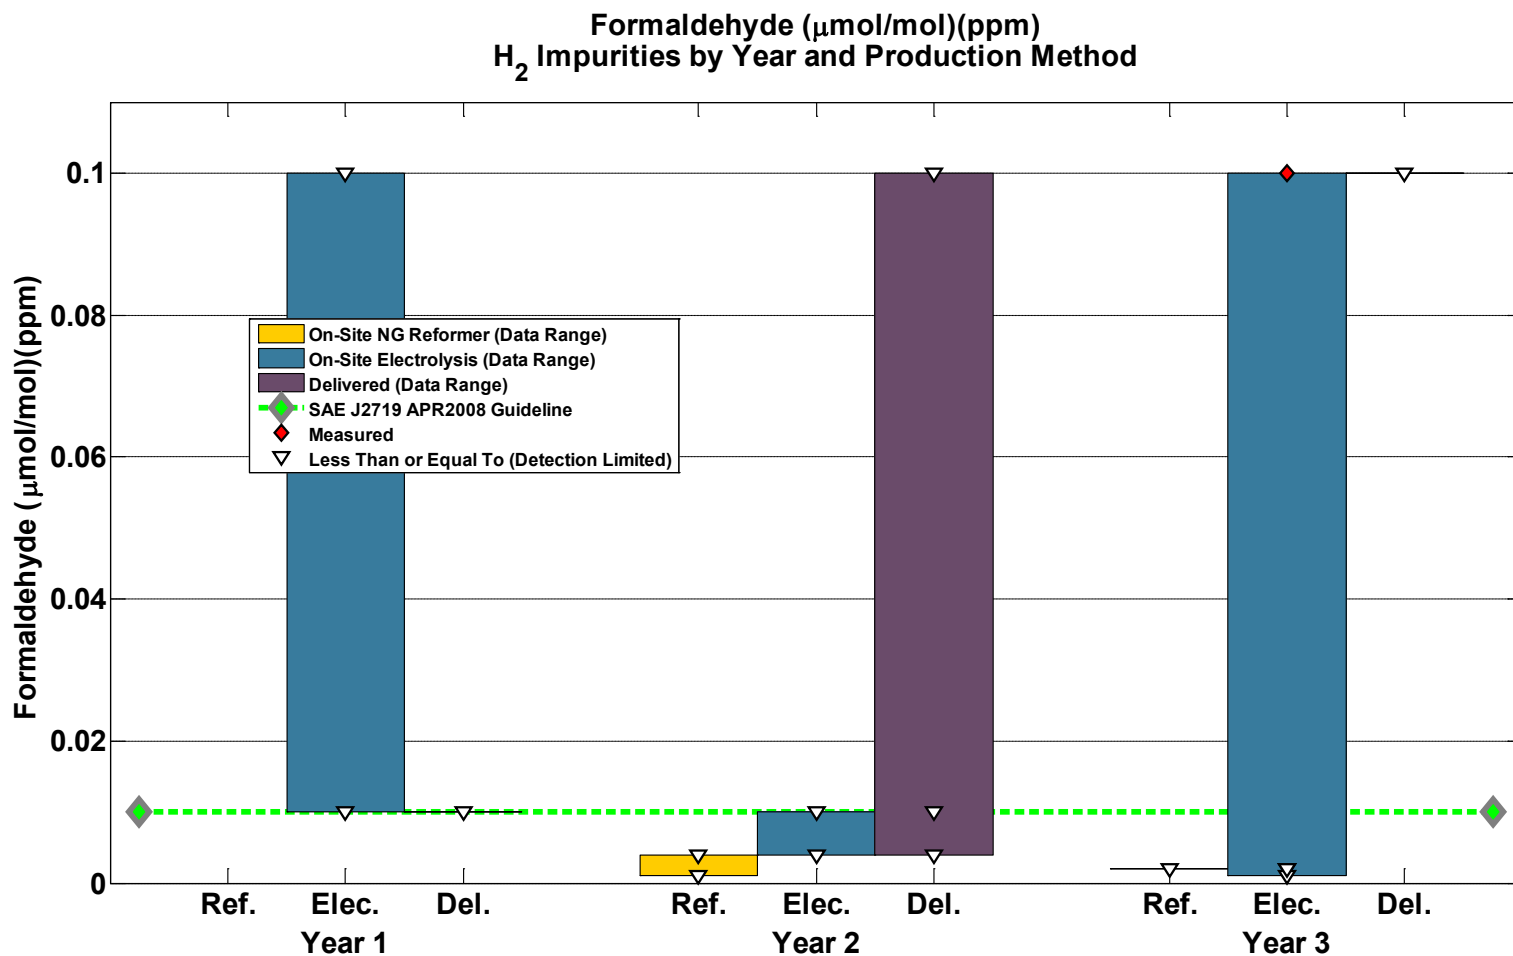

Data is from Learning Demonstration and California Fuel Cell Partnership testing
 Year 1 is 2005Q3-2006Q2, Year 2 is 2006Q3-2007Q2, and Year 3 is 2007Q3-2008Q2

Created: Sep-22-08 1:42 PM


CDP#28 Supplemental: Hydrogen Impurities by Year and Production Method

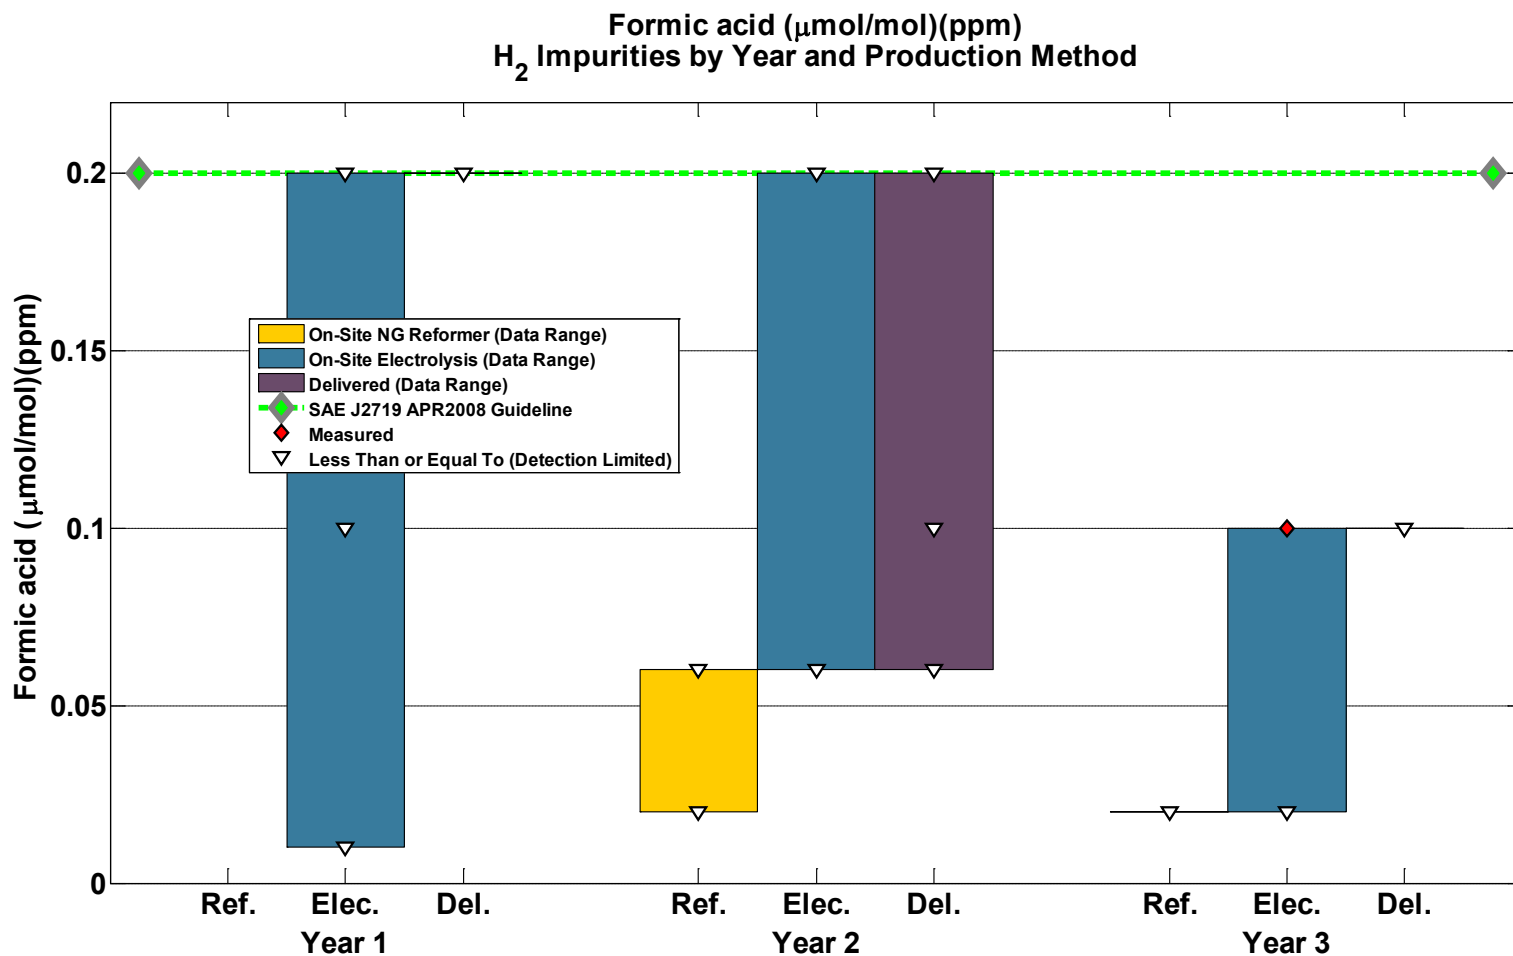

Data is from Learning Demonstration and California Fuel Cell Partnership testing
Year 1 is 2005Q3-2006Q2, Year 2 is 2006Q3-2007Q2, and Year 3 is 2007Q3-2008Q2

Created: Sep-22-08 1:42 PM


CDP#28 Supplemental: Hydrogen Impurities by Year and Production Method

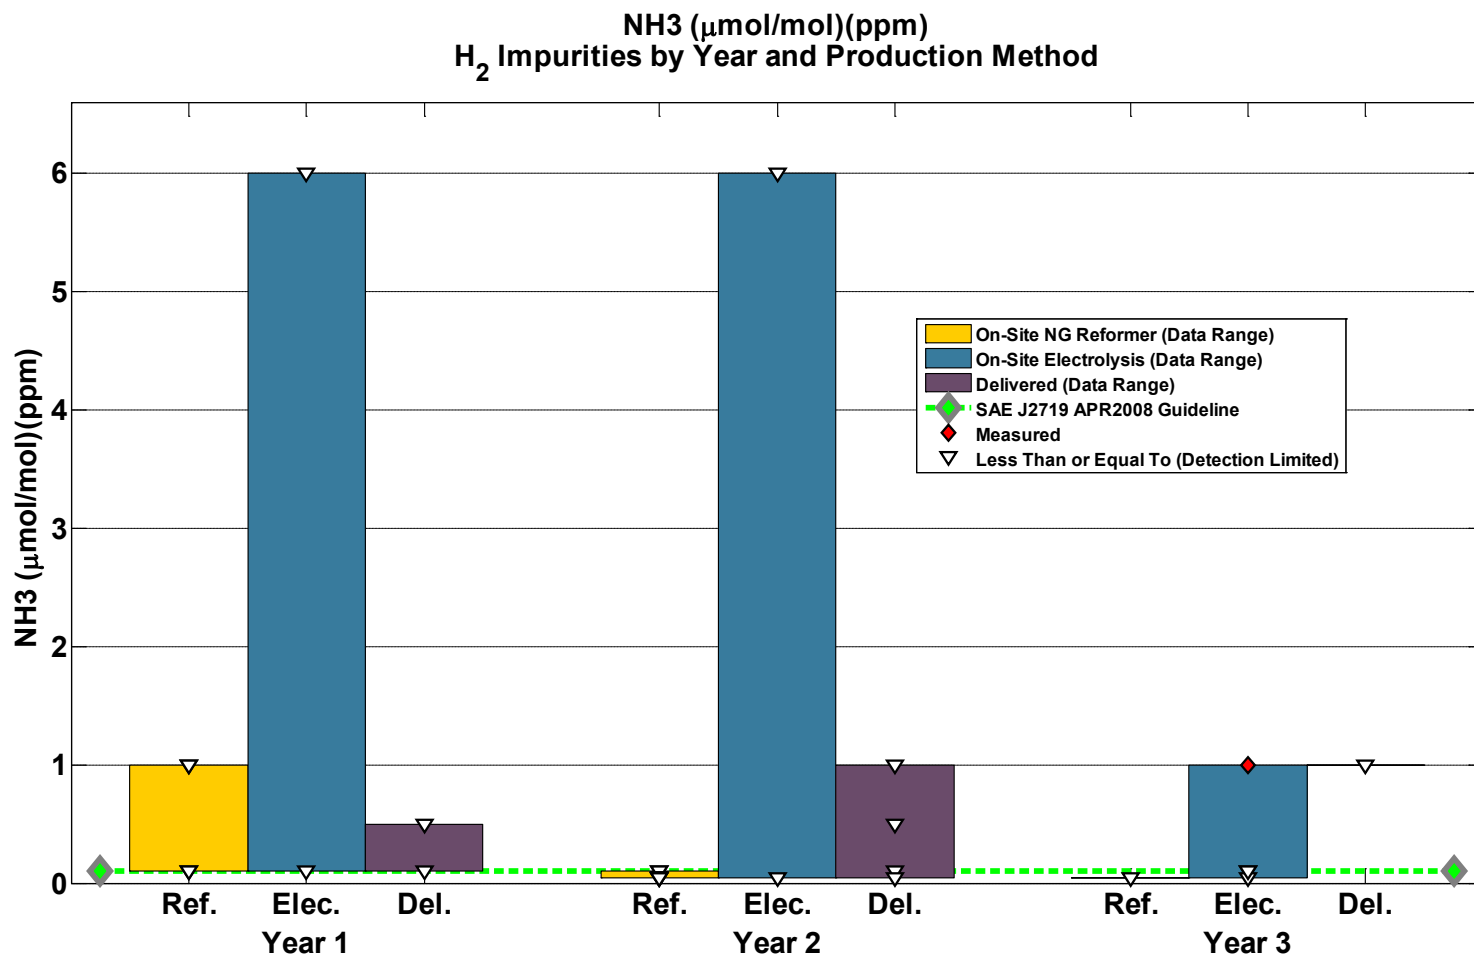

Data is from Learning Demonstration and California Fuel Cell Partnership testing
Year 1 is 2005Q3-2006Q2, Year 2 is 2006Q3-2007Q2, and Year 3 is 2007Q3-2008Q2

Created: Sep-22-08 1:42 PM


CDP#28 Supplemental: Hydrogen Impurities by Year and Production Method

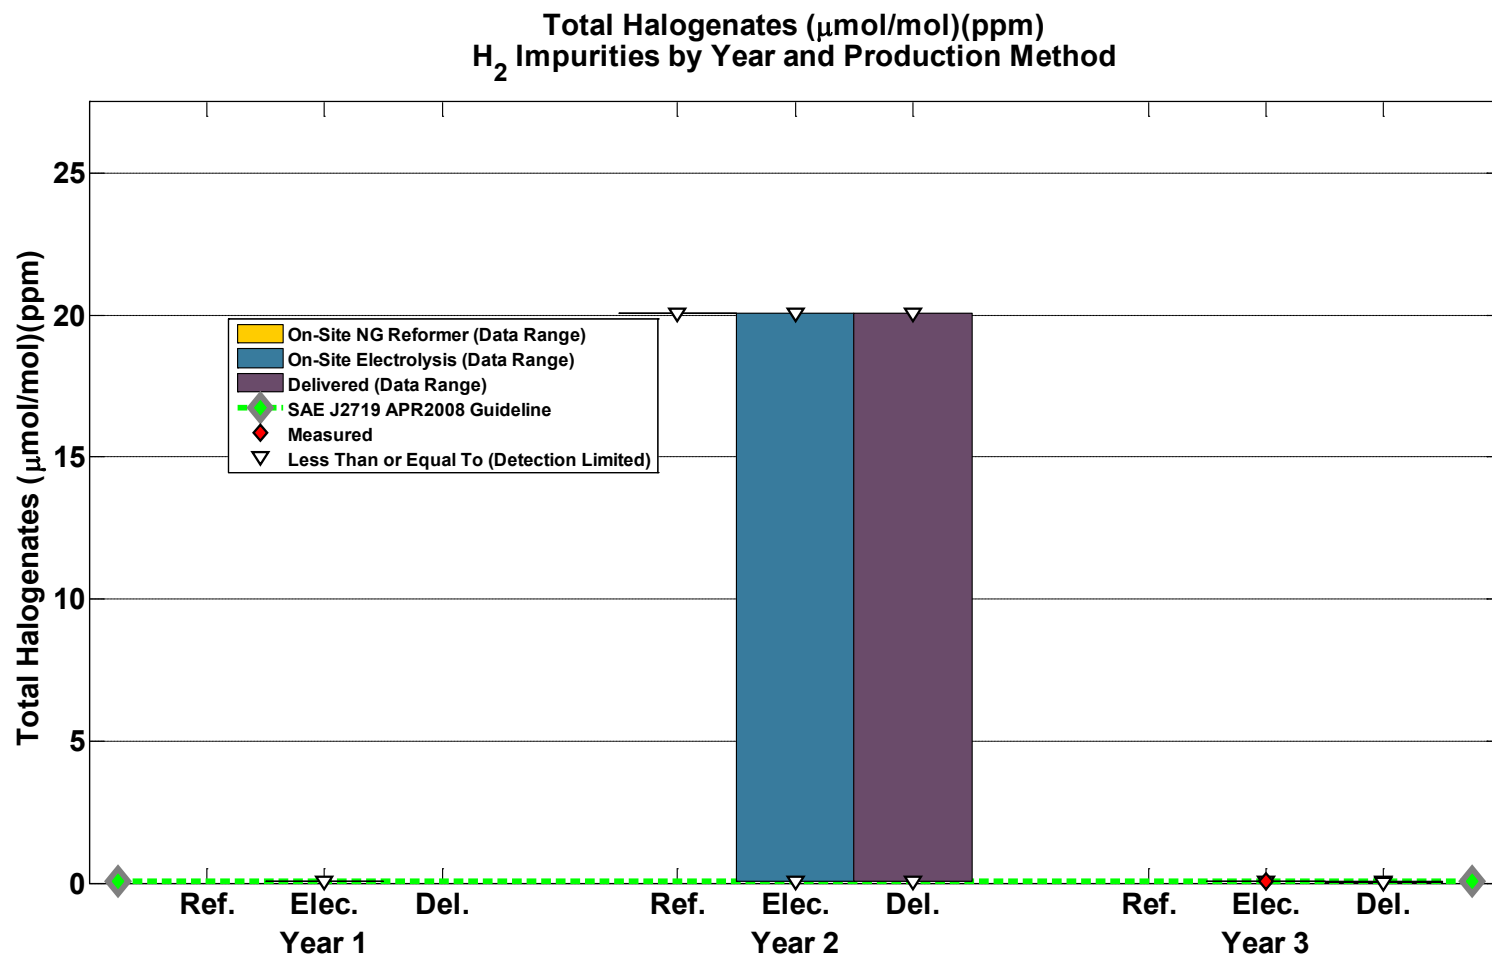

Data is from Learning Demonstration and California Fuel Cell Partnership testing
Year 1 is 2005Q3-2006Q2, Year 2 is 2006Q3-2007Q2, and Year 3 is 2007Q3-2008Q2

Created: Sep-22-08 1:42 PM


CDP#28 Supplemental: Hydrogen Impurities by Year and Production Method

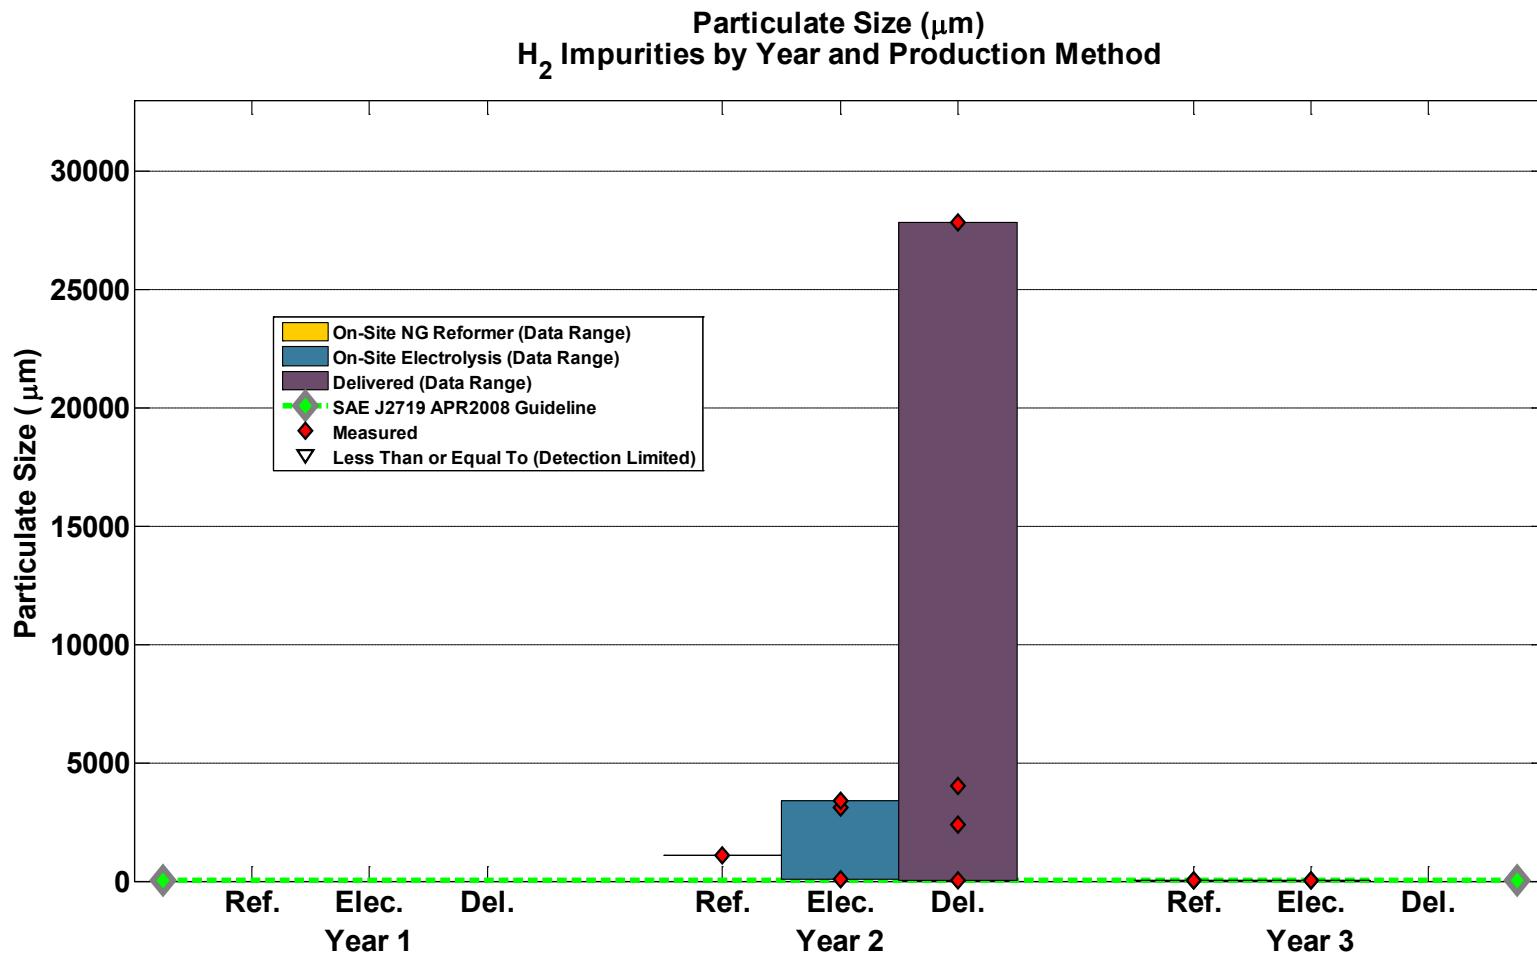

Data is from Learning Demonstration and California Fuel Cell Partnership testing
 Year 1 is 2005Q3-2006Q2, Year 2 is 2006Q3-2007Q2, and Year 3 is 2007Q3-2008Q2

Created: Sep-22-08 1:42 PM


CDP#29: Fueling Rates – Communication and Non-Communication Fills

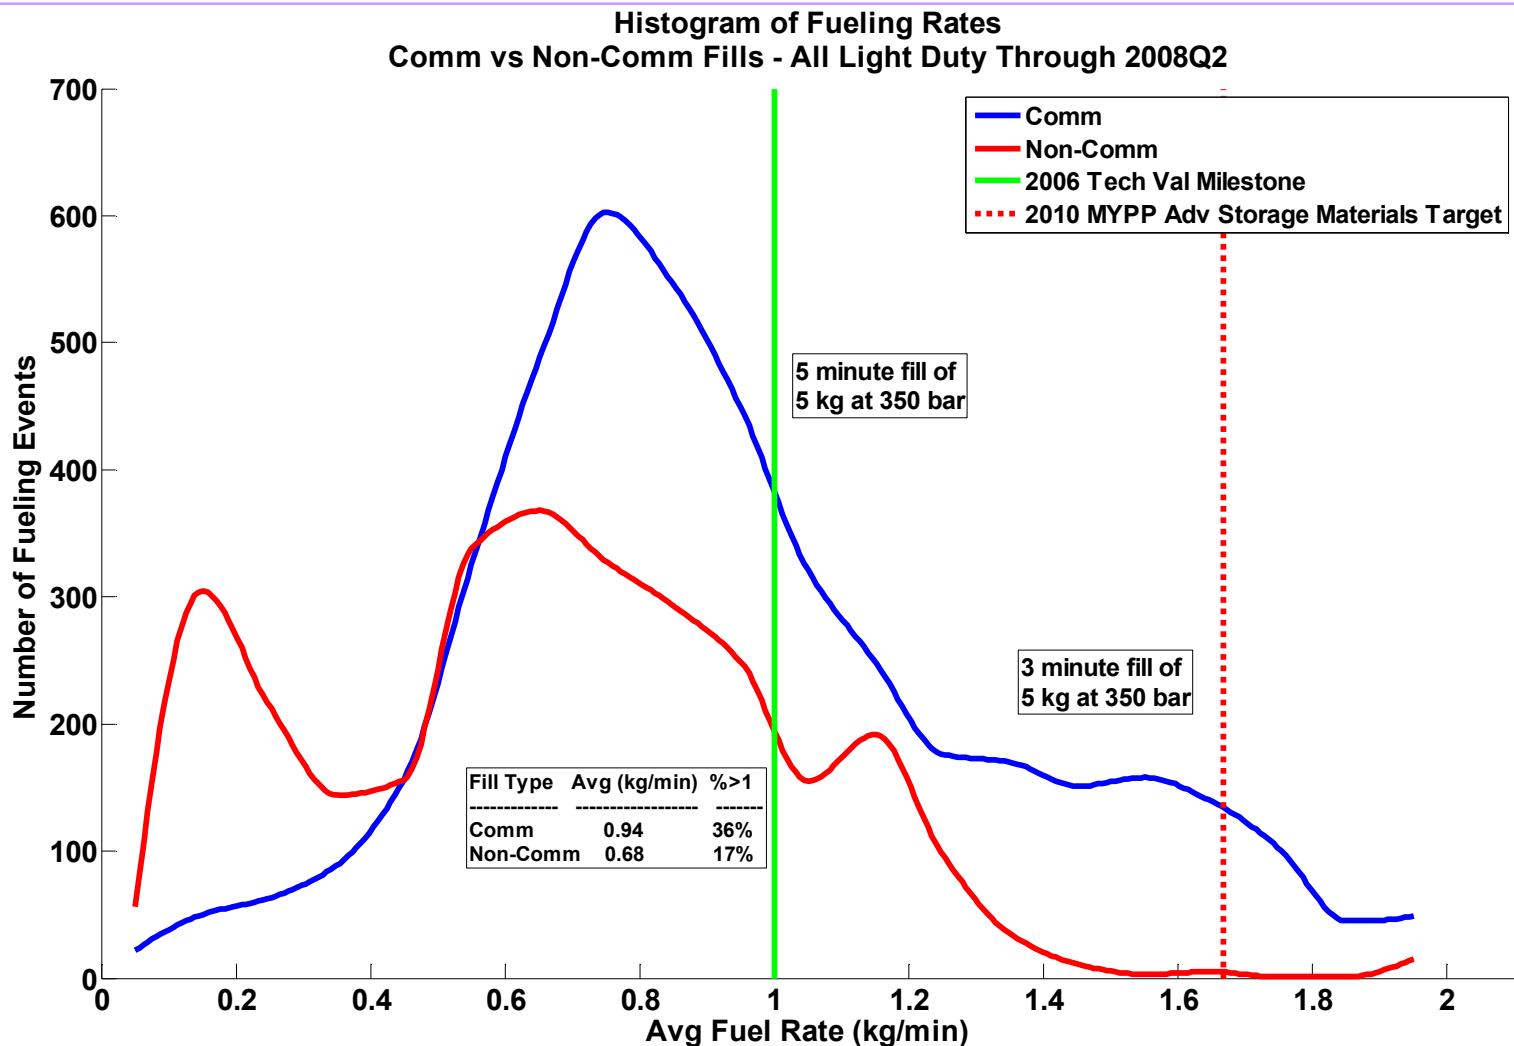


Created: Sep-02-08 4:59 PM

CDP#30: Infrastructure Maintenance


Maintenance: Average Labor Hours Per Station Since Inception Through 2008 Q2

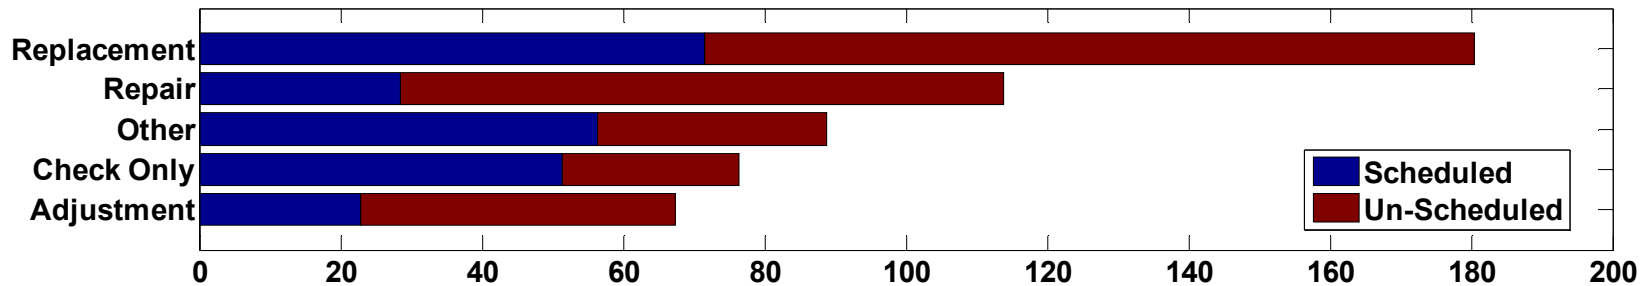


Maintenance: Average Number of Events Per Station Since Inception

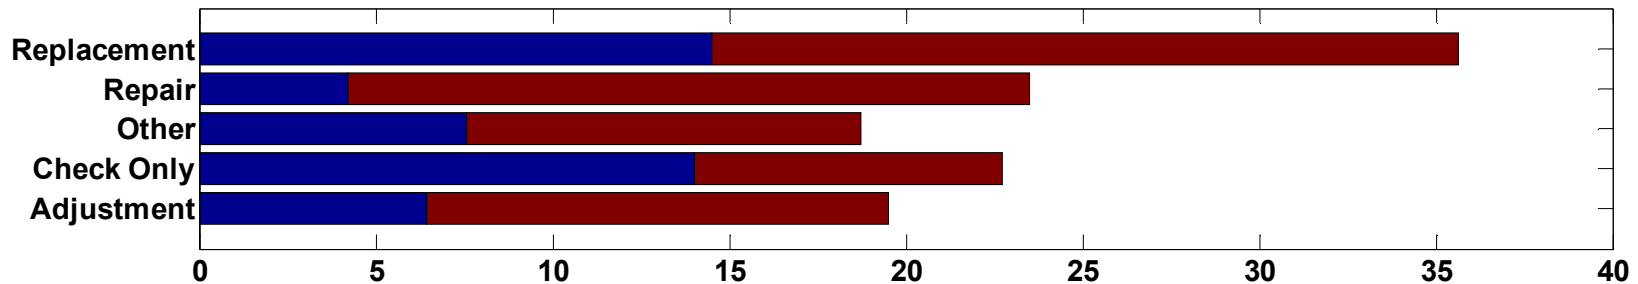

Comparison of Scheduled/Un-Scheduled Maintenance

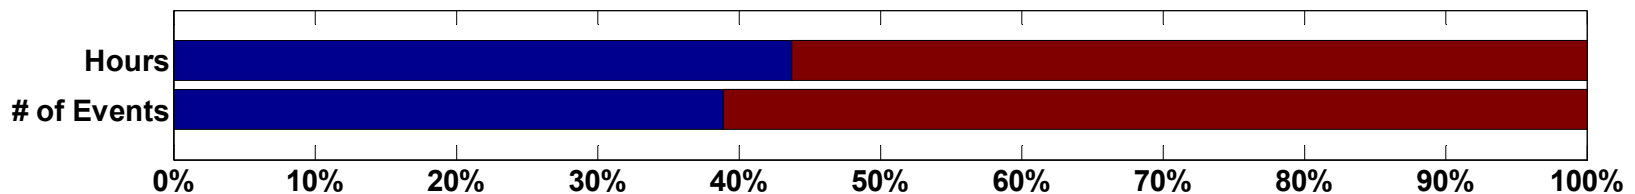


CDP#31: Number of Reporting Stations

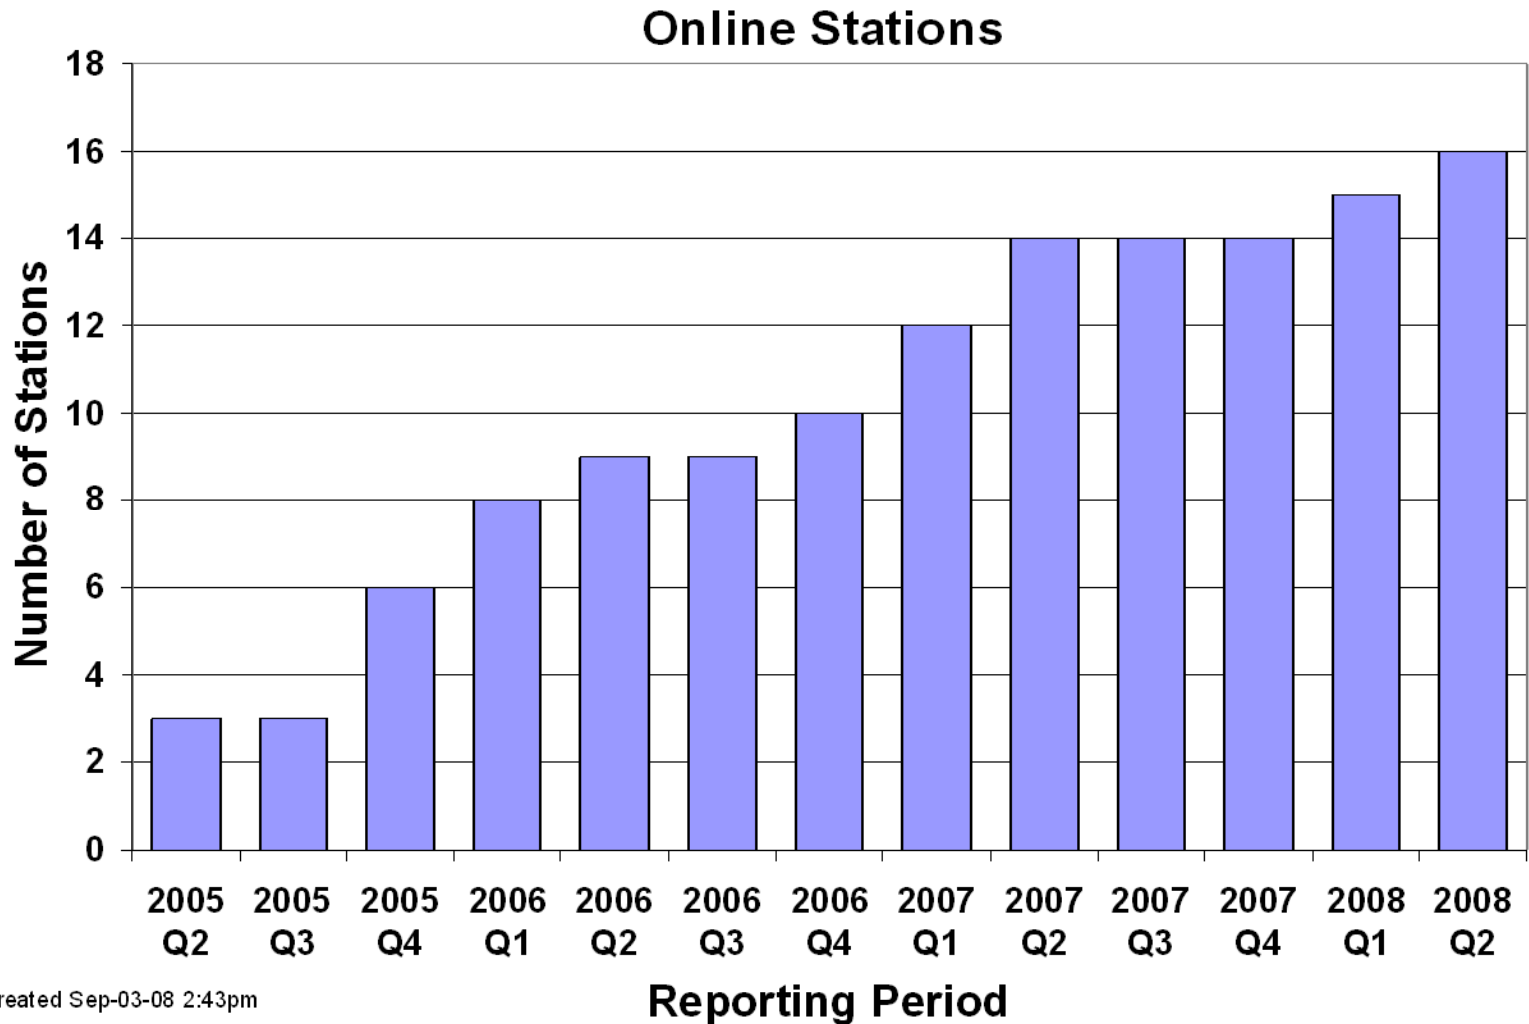

Created Sep-03-08 2:43pm


CDP#32: Infrastructure Hydrogen Production Methods

Infrastructure Hydrogen Production Methods

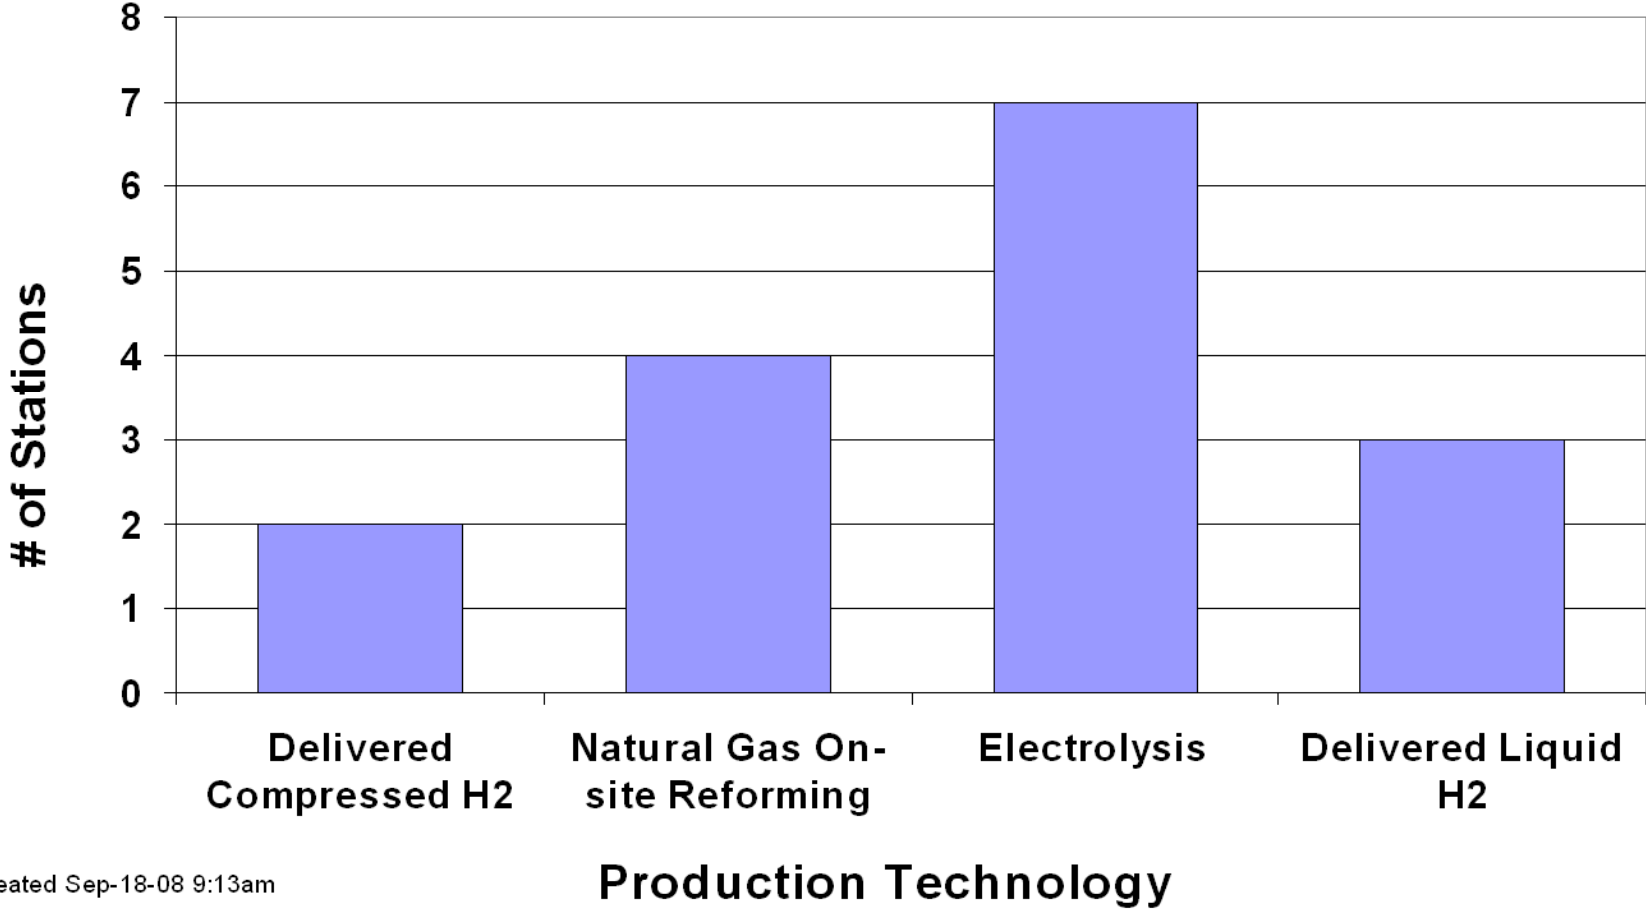

Created Sep-18-08 9:13am


CDP#33: Percentage of Theoretical Range Traveled Between Refuelings

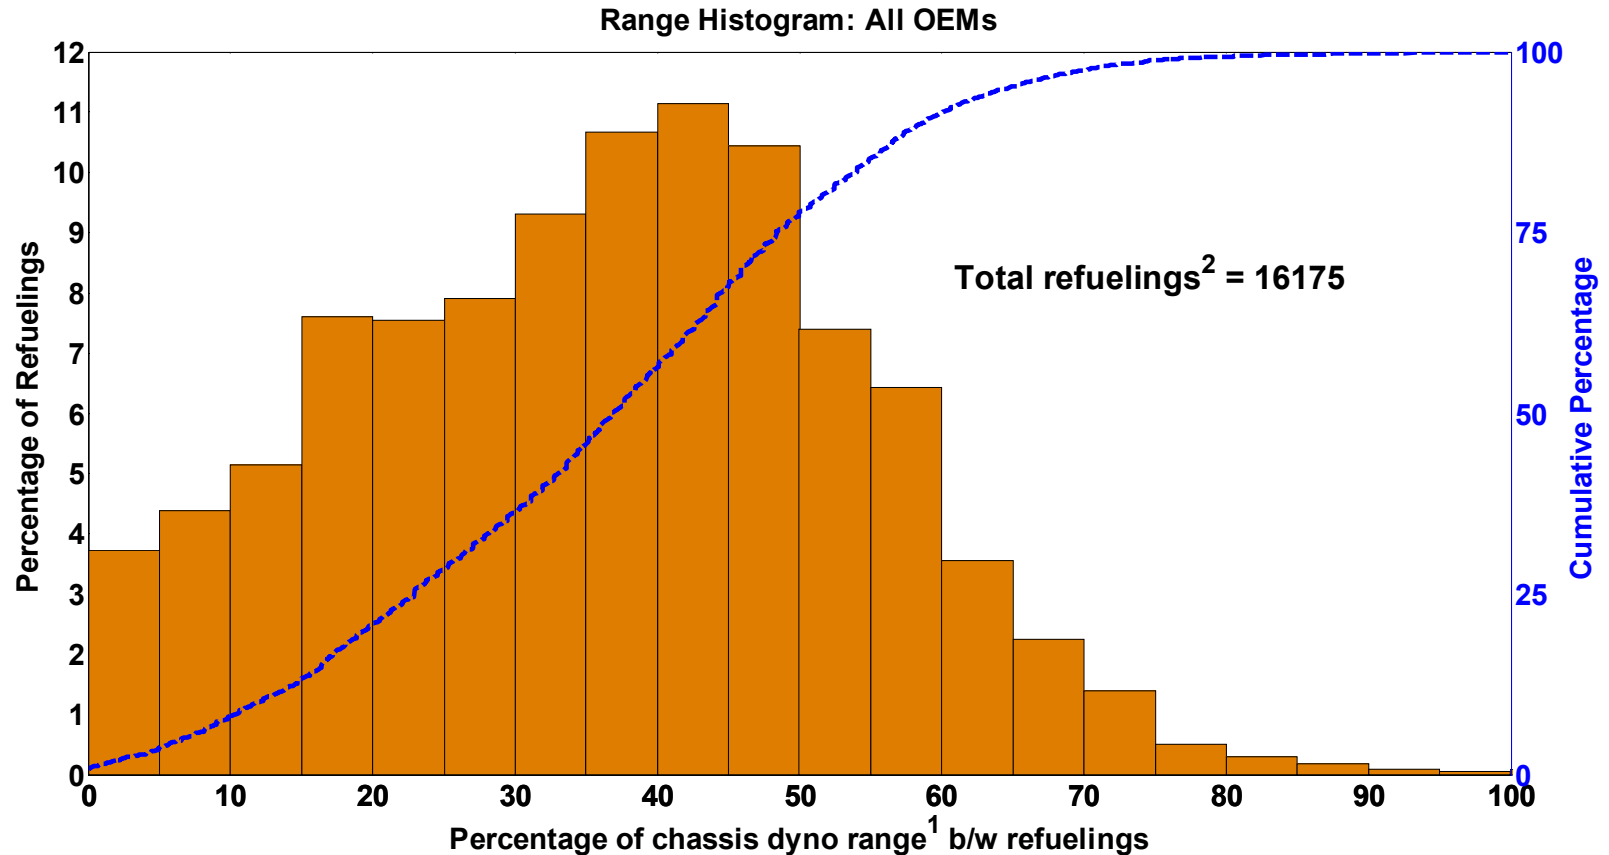

1. Range calculated using the combined City/Hwy fuel economy from dyno testing (not EPA adjusted) and usable fuel on board.

2. Some refueling events are not detected/reported due to data noise or incompleteness.


CDP#34: Effective Vehicle Range

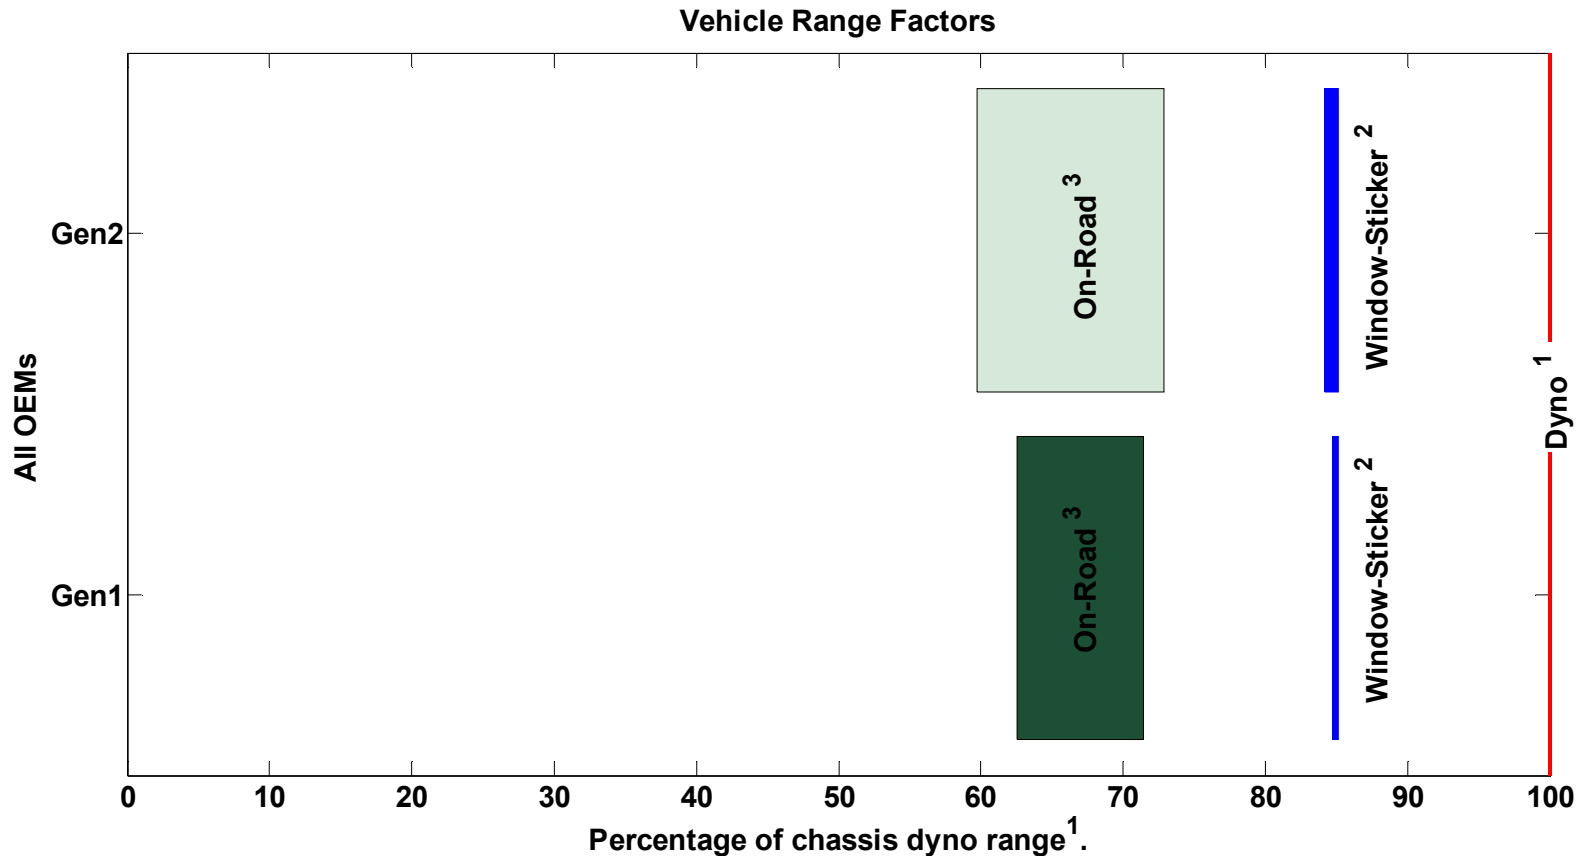

1. Calculated using the combined City/Hwy fuel economy from dyno testing (non-adjusted) and usable fuel on board.
2. Applying window-sticker correction factors for fuel economy: 0.78 x Hwy and 0.9 x City.
3. Using fuel economy from on-road data (excluding trips > 1 mile, consistent with other data products).


Created: Sep-22-08 11:52 AM

CDP#35: Average Refuelings Between Infrastructure Safety Reports

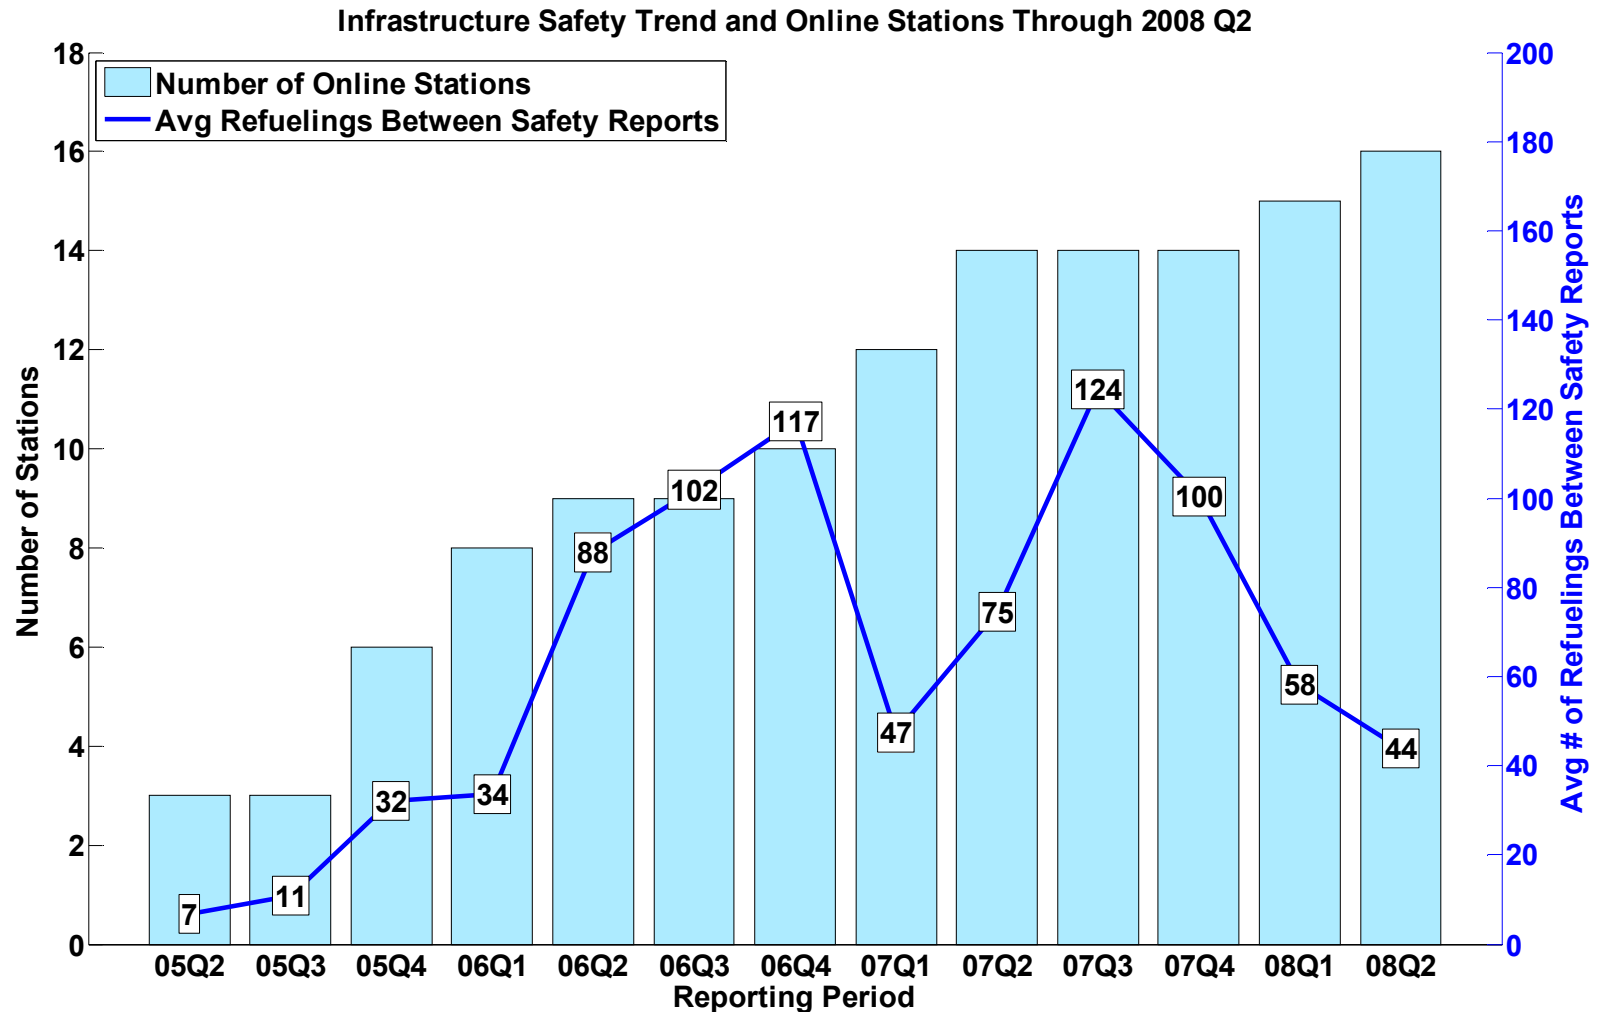

Created: Sep-02-08 5:02 PM

CDP#36: Type of Infrastructure Safety Report By Quarter

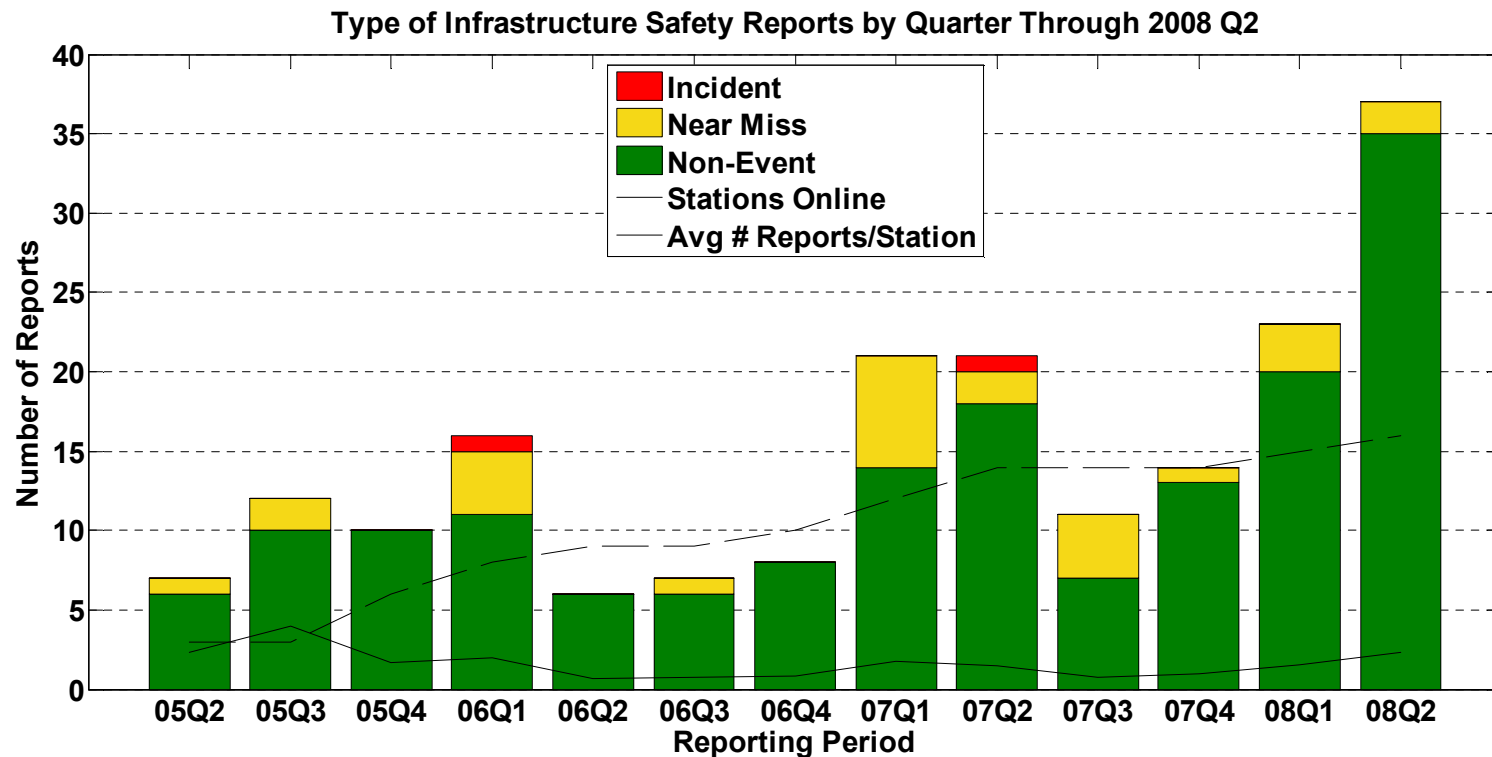

An INCIDENT is an event that results in:


- a lost time accident and/or injury to personnel
- damage/unplanned downtime for project equipment, facilities or property
- impact to the public or environment
- any hydrogen release that unintentionally ignites or is sufficient to sustain a flame if ignited
- release of any volatile, hydrogen containing compound (other than the hydrocarbons used as common fuels)

A NEAR-MISS is:

- an event that under slightly different circumstances could have become an incident
- unplanned H2 release insufficient to sustain a flame

CDP#37: Primary Factors of Infrastructure Safety Reports

Primary Factors of Infrastructure Safety Reports
Through 2008 Q2

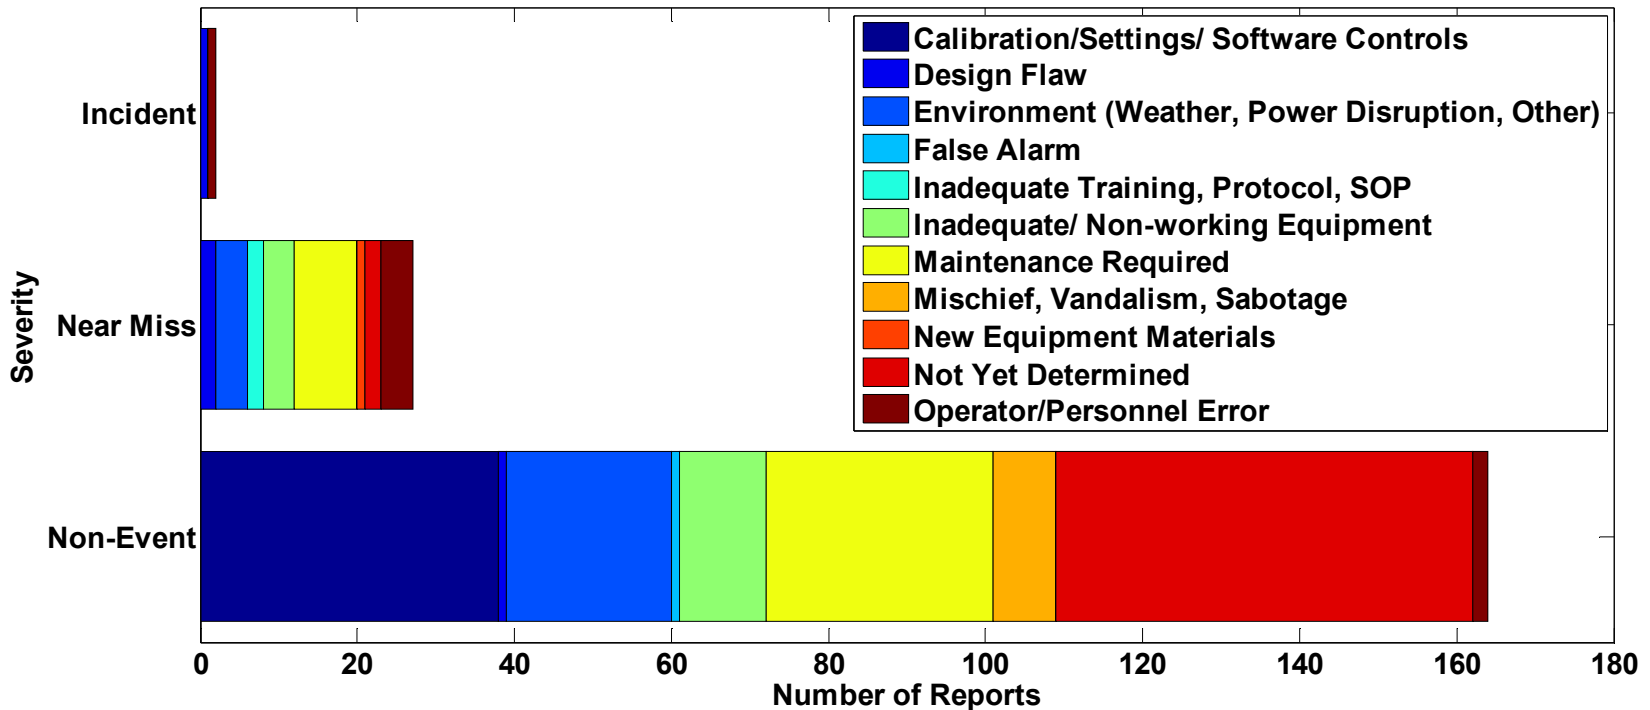


An INCIDENT is an event that results in:

- a lost time accident and/or injury to personnel
- damage/unplanned downtime for project equipment, facilities or property
- impact to the public or environment
- any hydrogen release that unintentionally ignites or is sufficient to sustain a flame if ignited
- release of any volatile, hydrogen containing compound (other than the hydrocarbons used as common fuels)

A NEAR-MISS is:


- an event that under slightly different circumstances could have become an incident
- unplanned H2 release insufficient to sustain a flame

CDP#38: Refueling Times

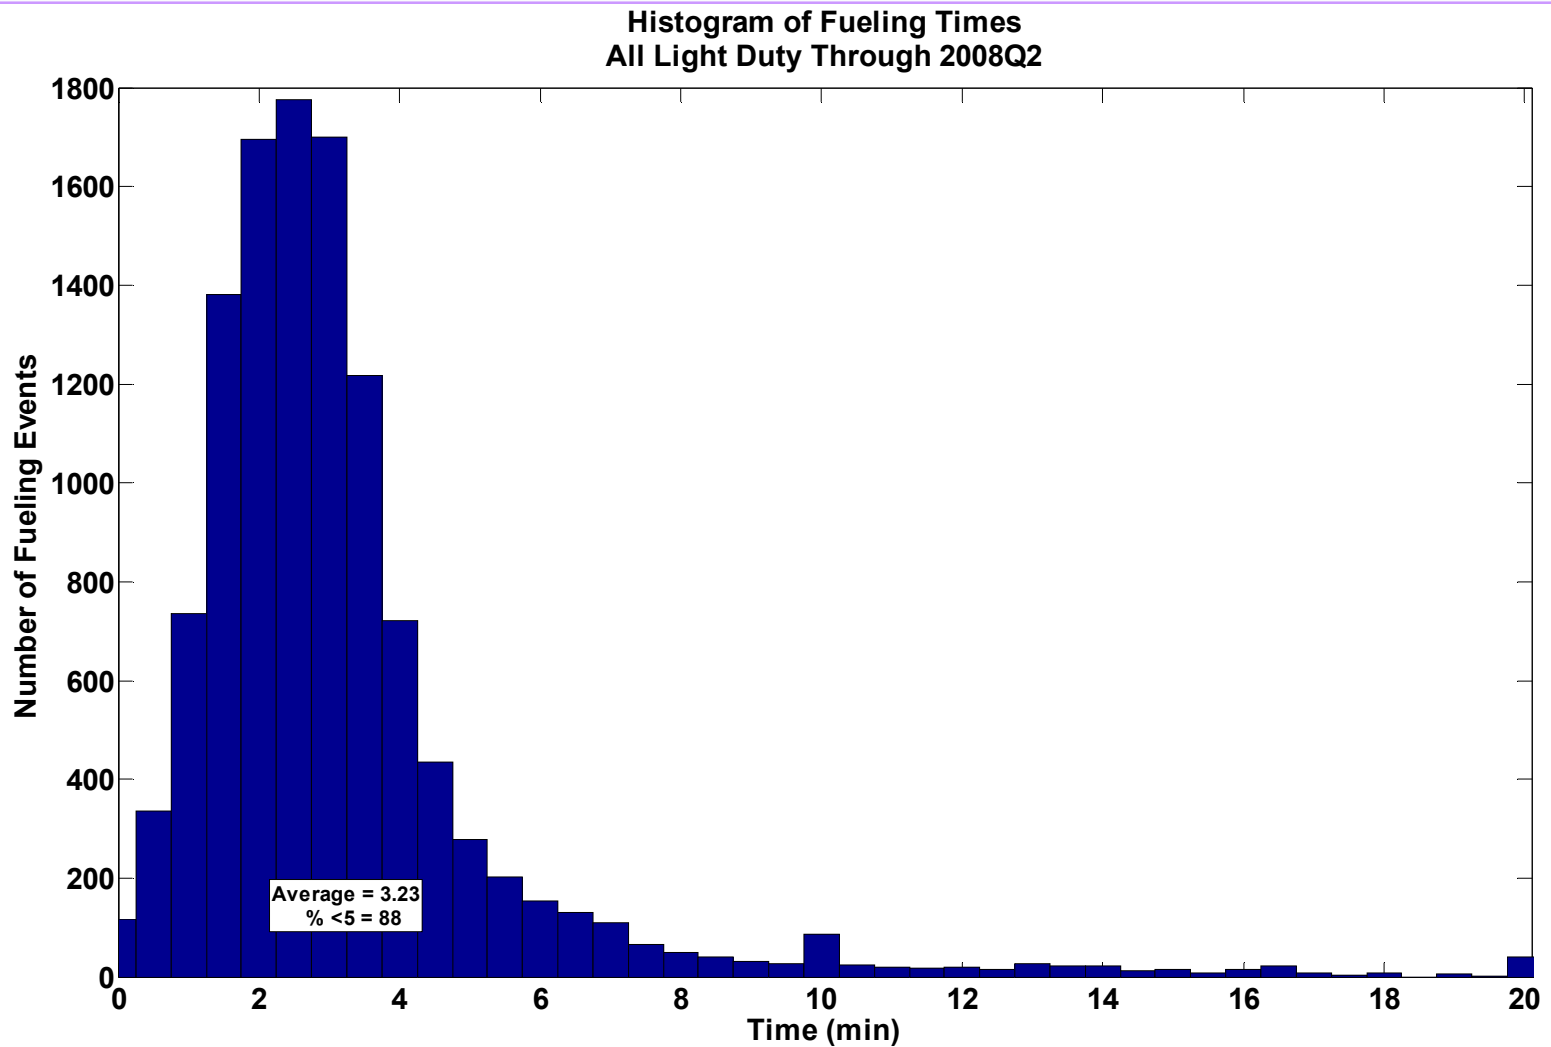

Created: Sep-02-08 4:21 PM

CDP#39: Refueling Amounts

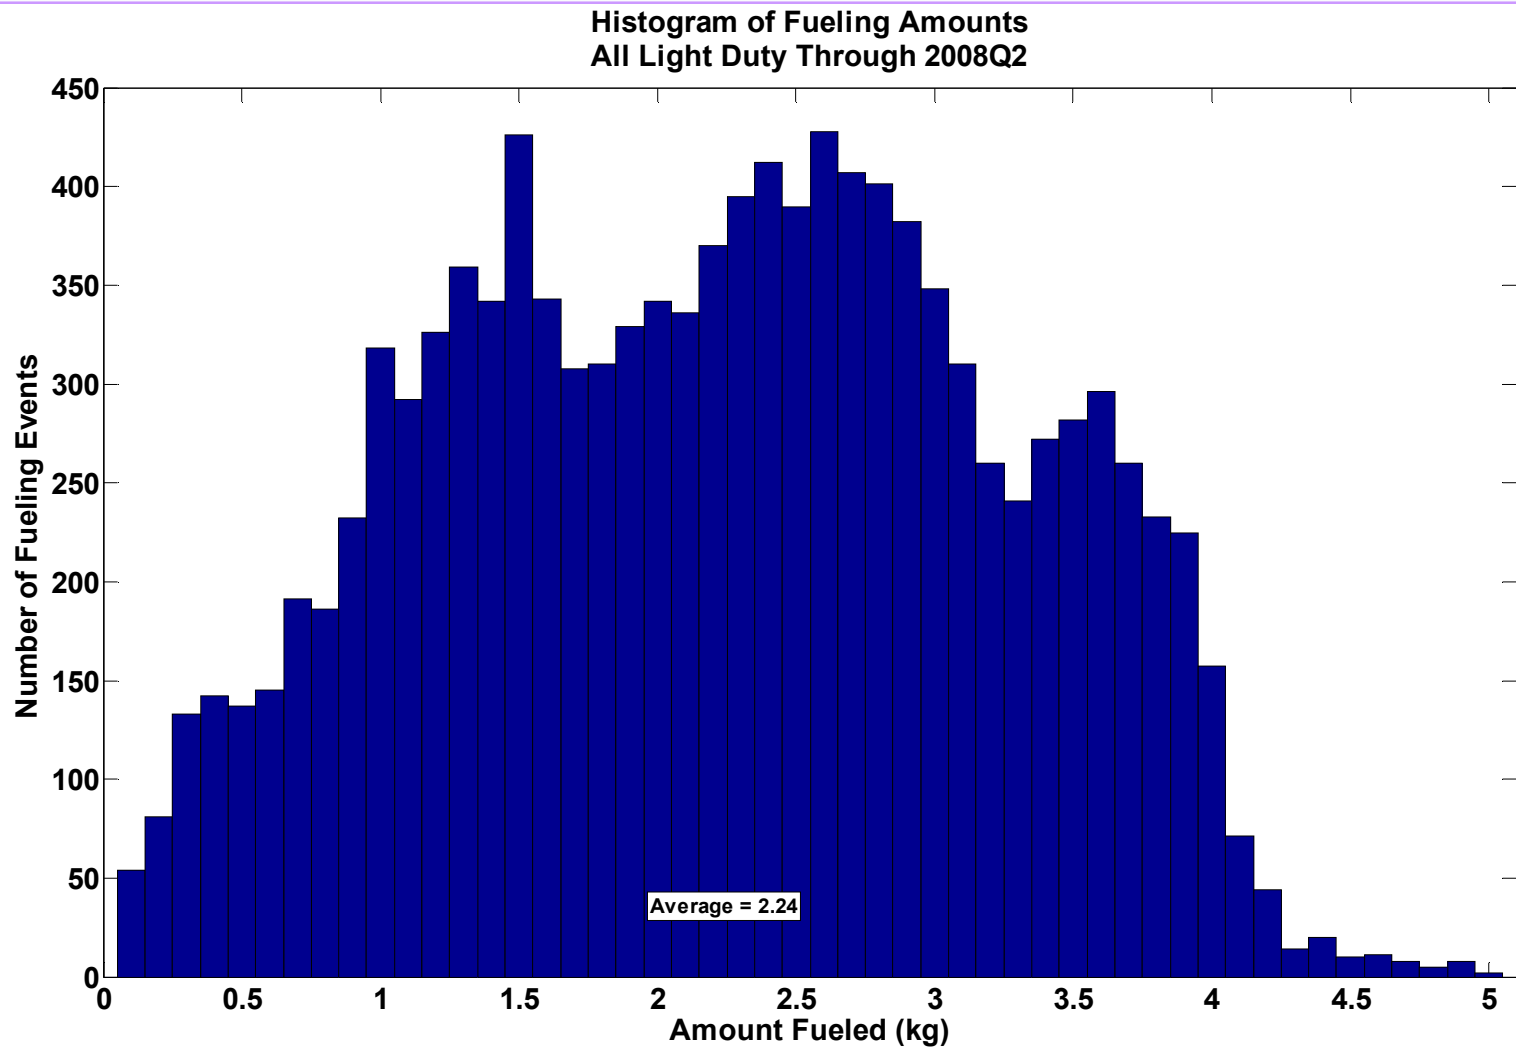


Created: Sep-02-08 4:21 PM

CDP#40: H2 Tank Level at Refueling

Tank Levels: DOE Fleet

Median Tank Level (At Fill) = 39%

Total refuelings¹ = 18060

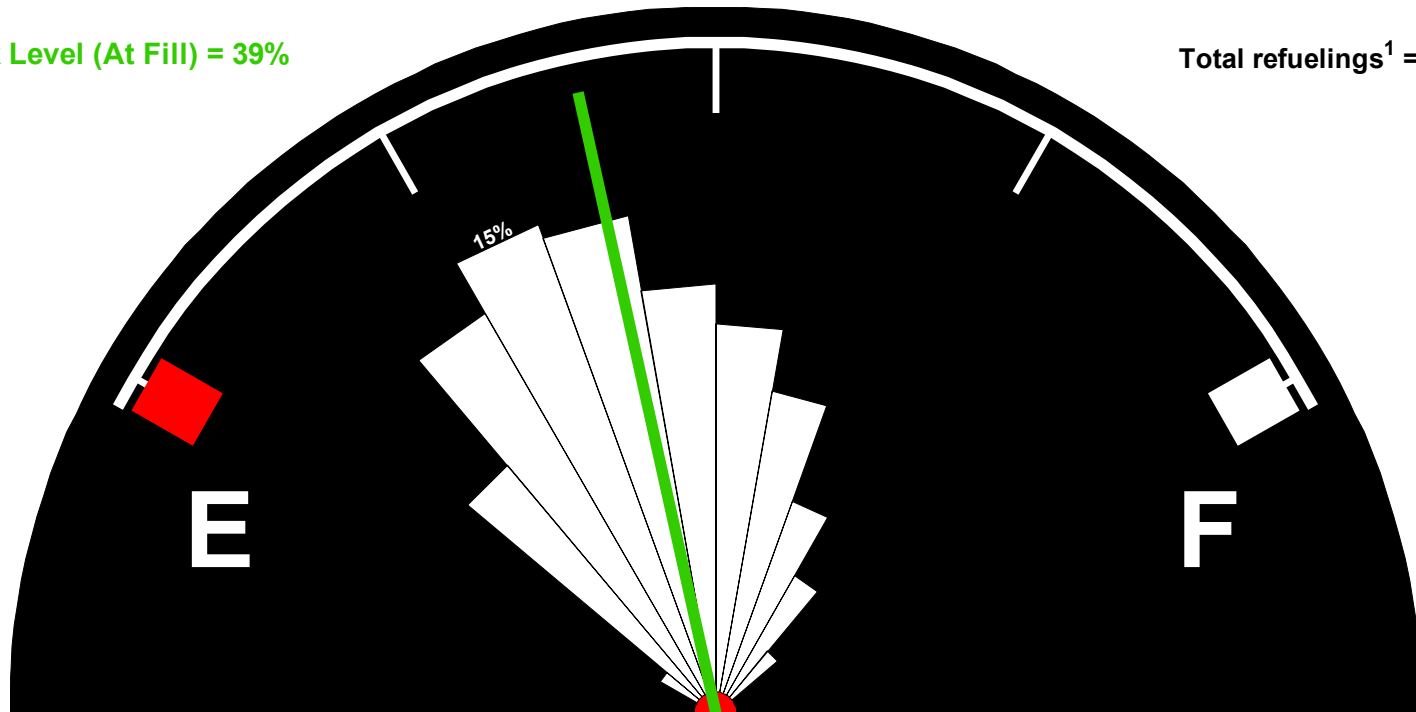


1. Some refueling events not recorded/detected due to data noise or incompleteness.
2. The outer arc is set at 20% total refuelings.
3. If tank level at fill was not available, a complete fill up was assumed.

Created: Sep-19-08 10:35 AM

CDP#41: Refueling Tank Levels - Medians

Tank Level Medians (At Fill): DOE Fleet, All Vehicles

Total refuelings¹ = 18060

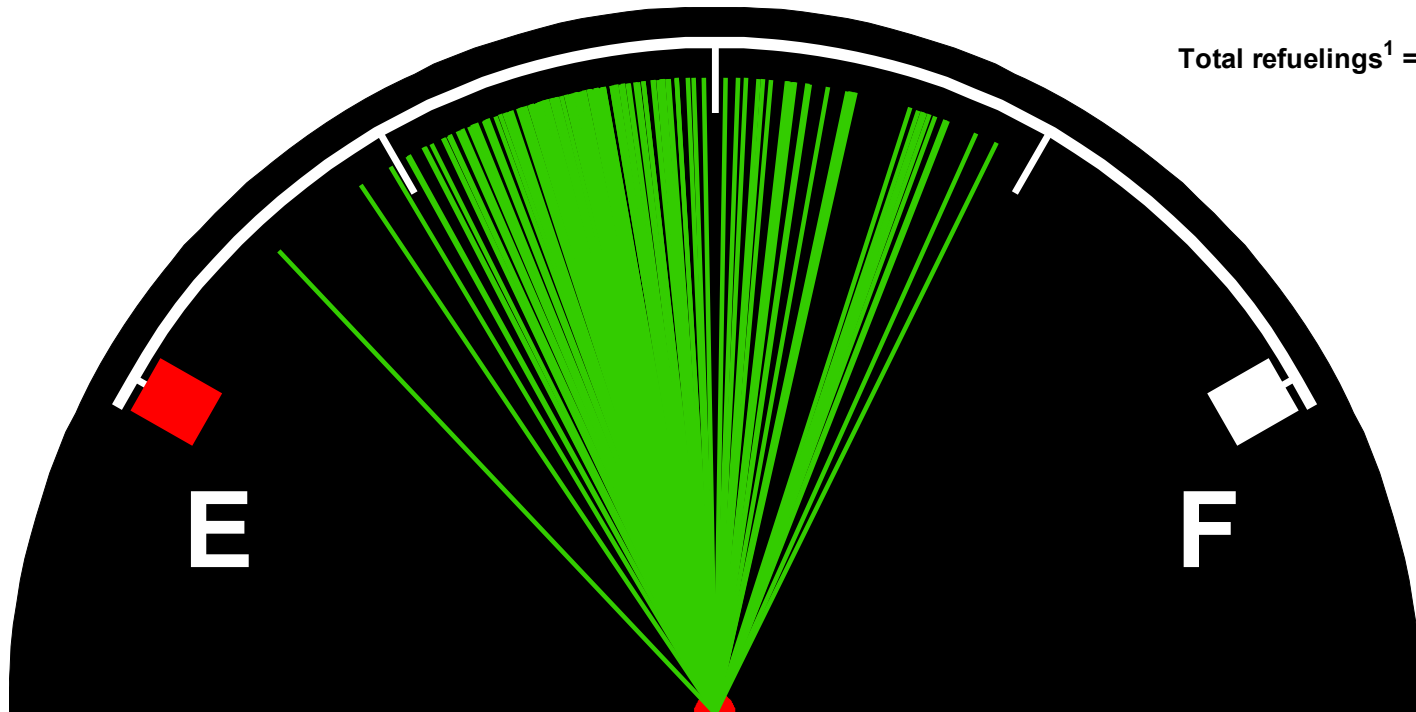

1. Some refueling events not recorded/detected due to data noise or incompleteness.
2. If tank level at fill was not available, a complete fill up was assumed.


Created: Sep-19-08 10:35 AM

CDP#42: Refueling by Time of Day

Refueling by Time of Day: DOE Fleet

% of fills b/t 6 AM & 6 PM: 90.4%


Total Fill³ Events = 15158

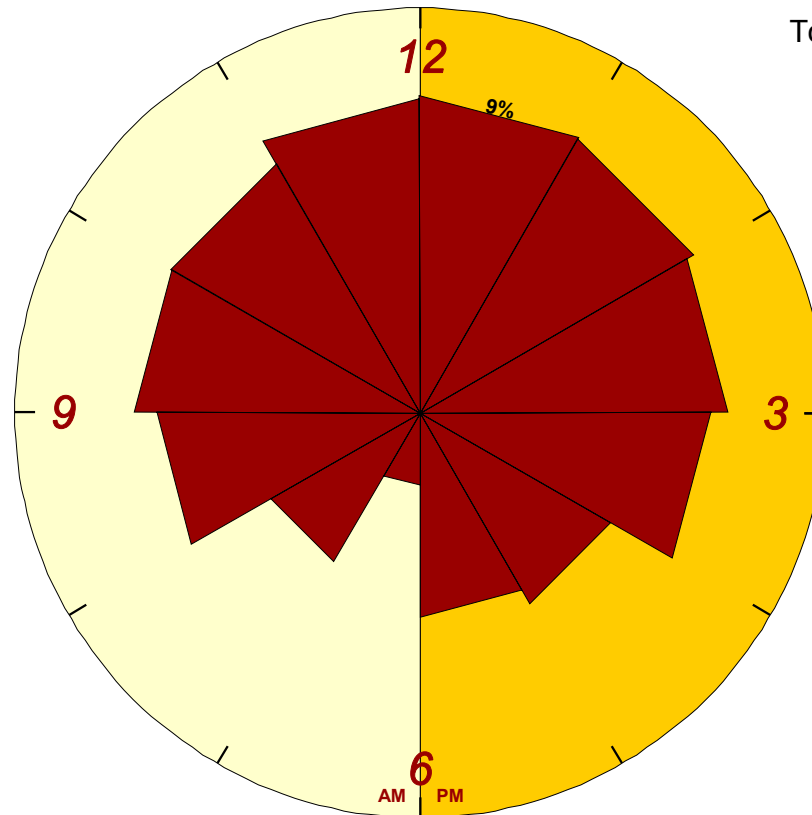

1. Fills between 6 AM & 6 PM
2. The outer arc is set at 12 % total Fill.
3. Some events not recorded/detected due to data noise or incompleteness.

Created: Sep-19-08 10:35 AM

CDP#43: Refueling by Day of Week

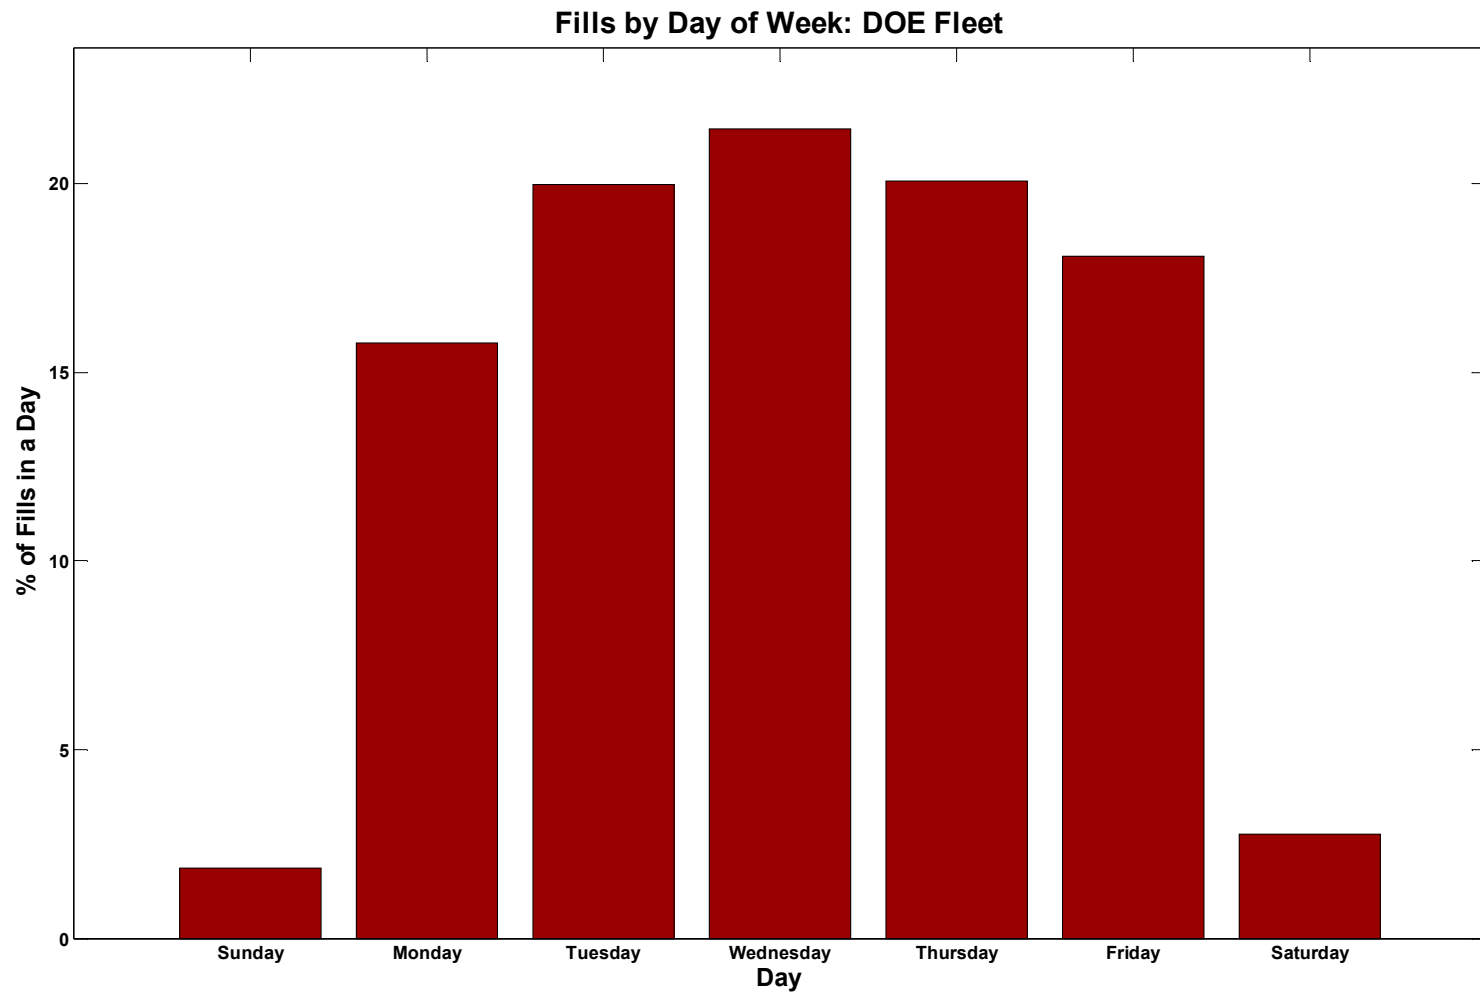

Created: Sep-19-08 10:35 AM


CDP#44: Driving Start Time – Day

Driving Start Time - Day: DOE Fleet

% of driving trips b/t 6 AM & 6 PM: 88.4%

% of NHTS trips b/t 6 AM & 6 PM: 81.5%

Total Driving³ Events = 181174

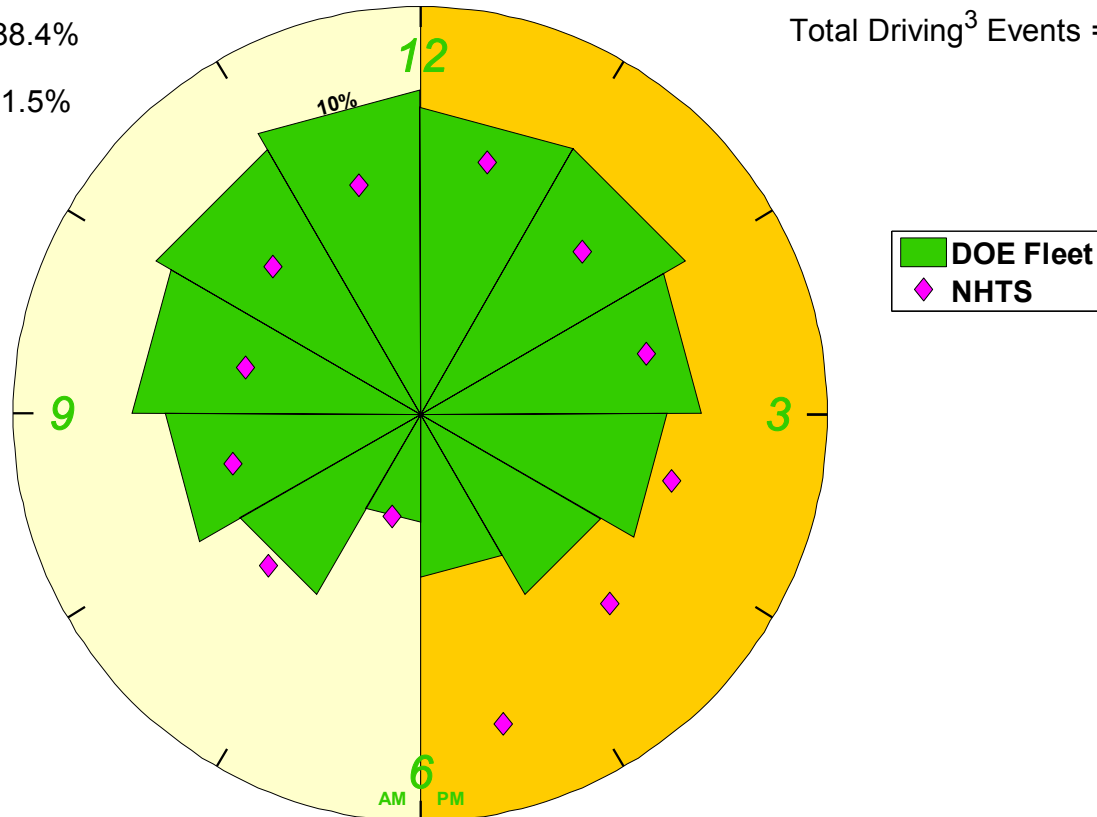


1. Driving trips between 6 AM & 6 PM
2. The outer arc is set at 12 % total Driving.
3. Some events not recorded/detected due to data noise or incompleteness.

2001 NHTS Data Includes Car, Truck, Van, & SUV day trips
ASCII.csv Source: <http://nhts.ornl.gov/download.shtml#2001>

Created: Aug-29-08 9:49 AM


CDP#45: Driving by Day of Week

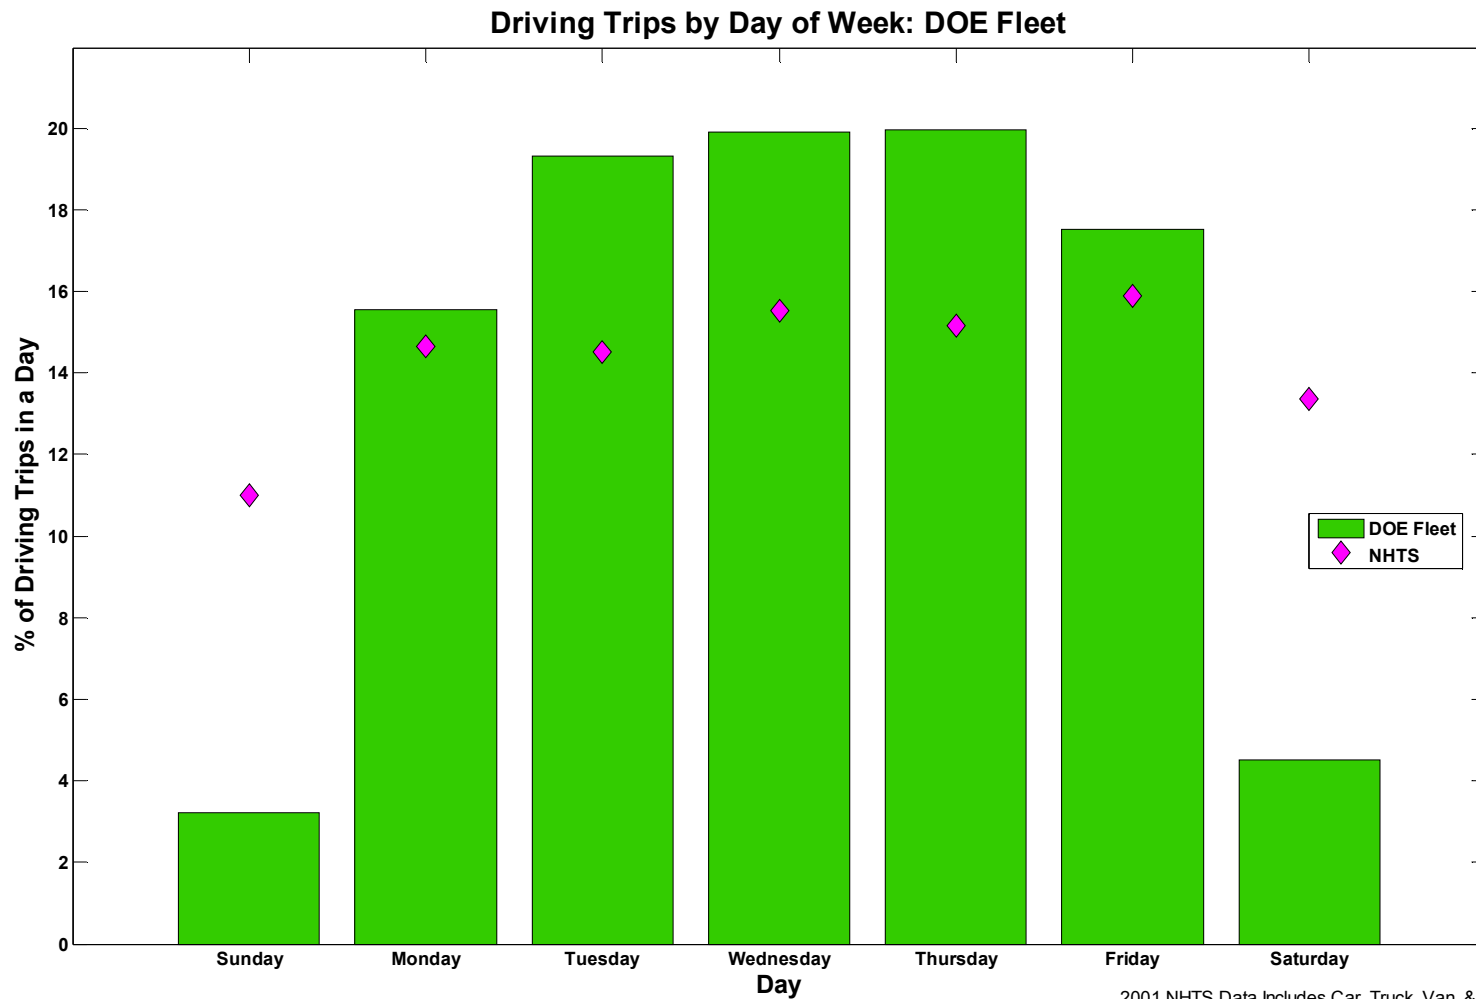

Created: Aug-29-08 9:49 AM


2001 NHTS Data Includes Car, Truck, Van, & SUV day trips
ASCII.csv Source: <http://nhts.ornl.gov/download.shtml#2001>

CDP#46: Fuel Cell System Operating Power

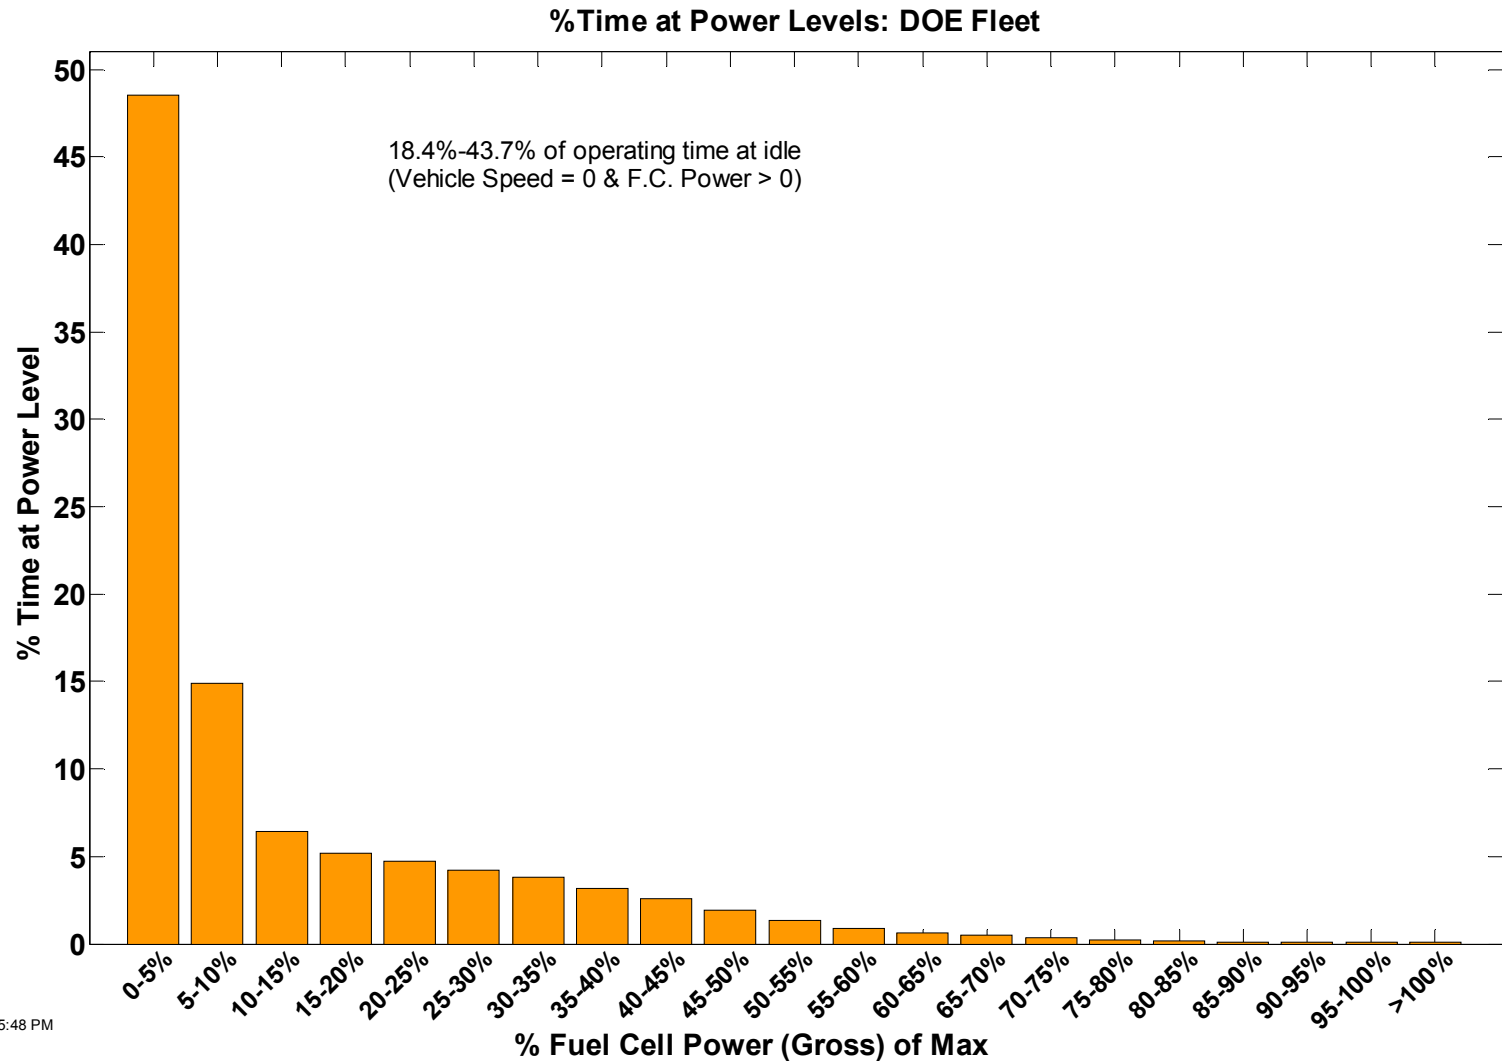

Created: Aug-28-08 5:48 PM


CDP#47: Trip Length

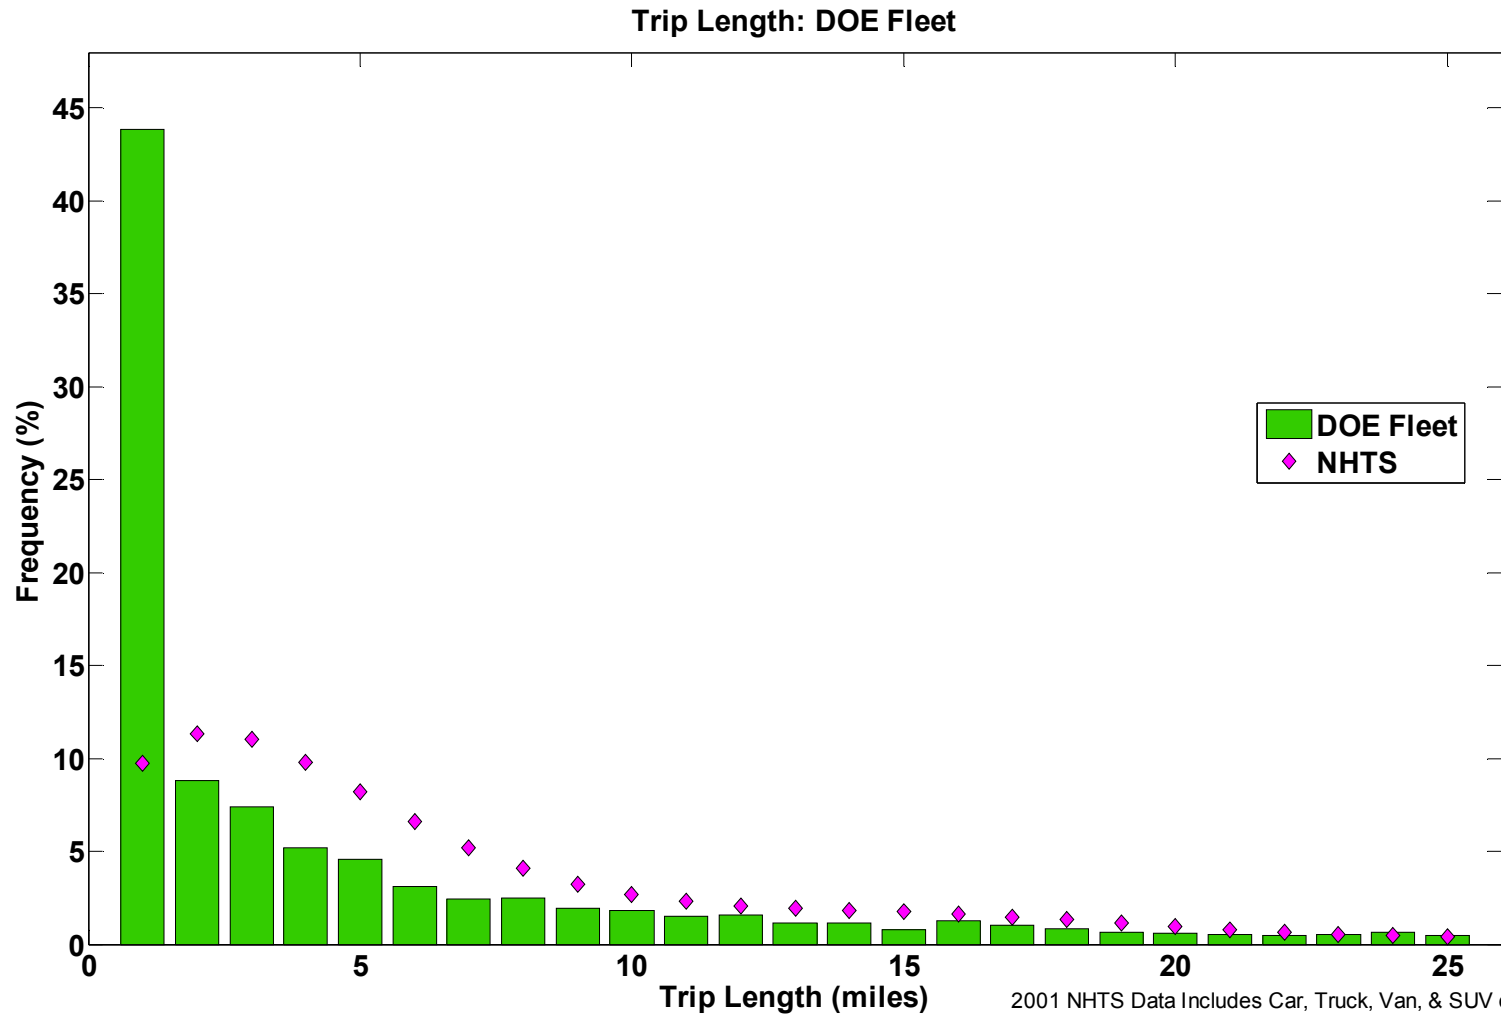

Created: Sep-03-08 11:06 AM

2001 NHTS Data Includes Car, Truck, Van, & SUV day trips
ASCII.csv Source: <http://nhts.oml.gov/download.shtml#2001>


CDP#48: Primary Factors Affecting Learning Demo Fleet Fuel Cell Degradation

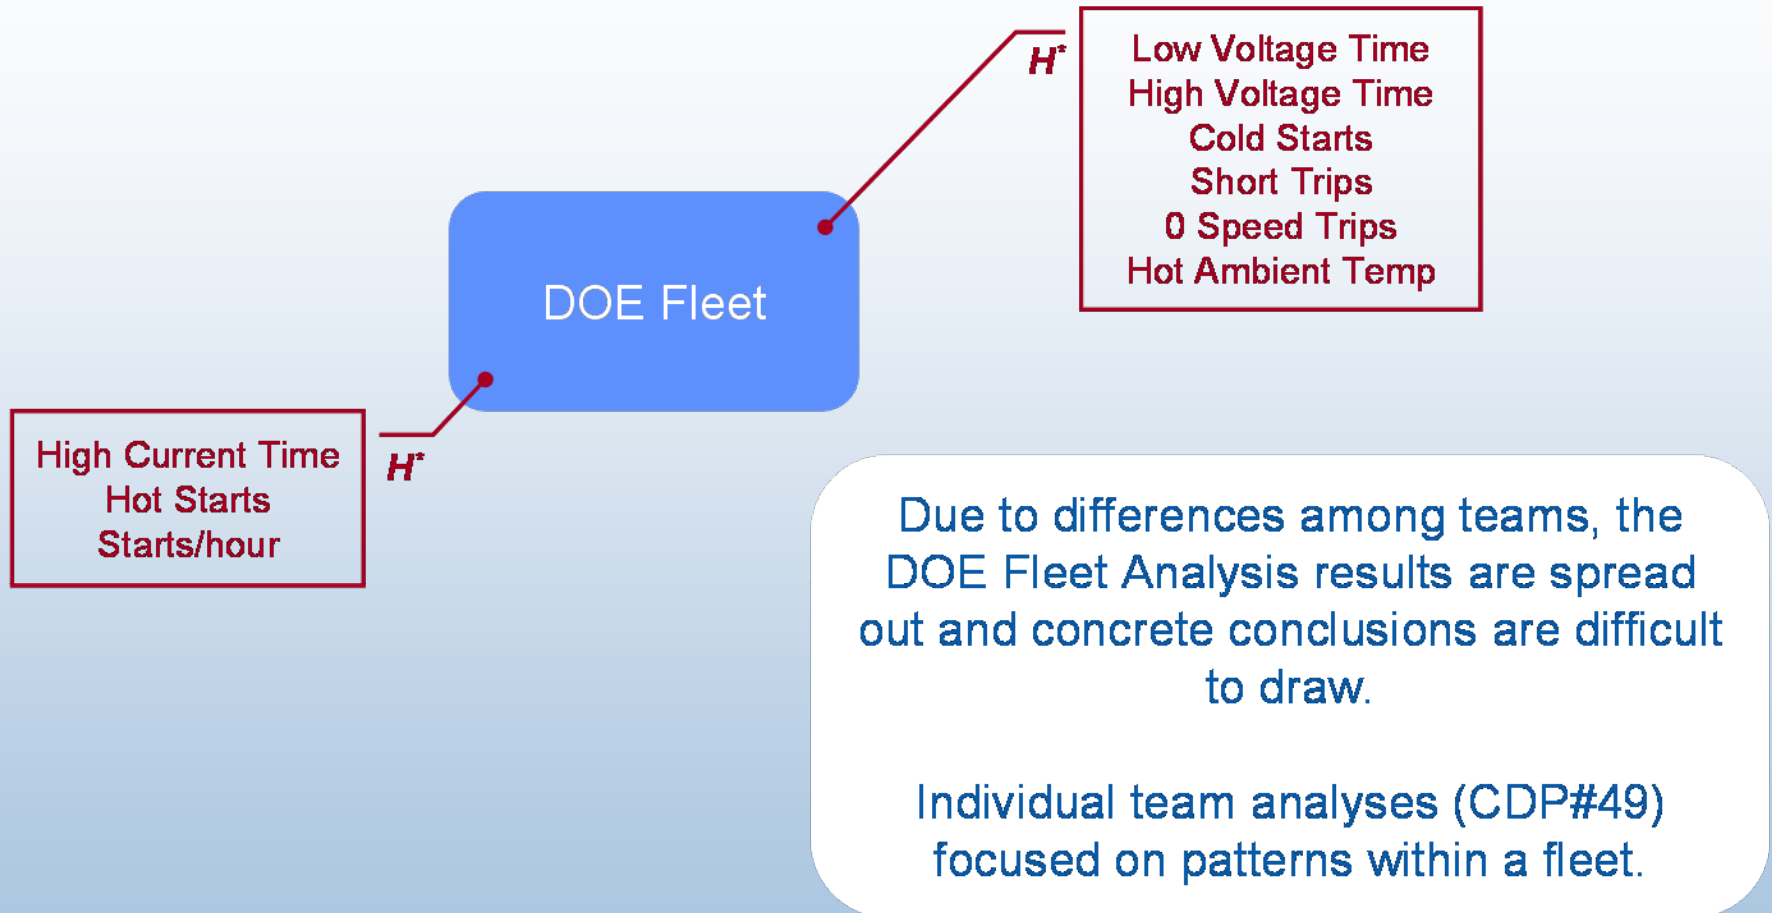

- 1) On-going fuel cell degradation study using Partial Least Squares (PLS) regression model for combined Learning Demonstration Fleet.
- 2) DOE Fleet model has a low percentage of explained decay rate variance.

H*: Factor group associated with high decay rate fuel cell stacks
L:** Factor group associated with low decay rate fuel cell stacks

CDP#49: Primary Factors Affecting Learning Demo Team Fuel Cell Degradation

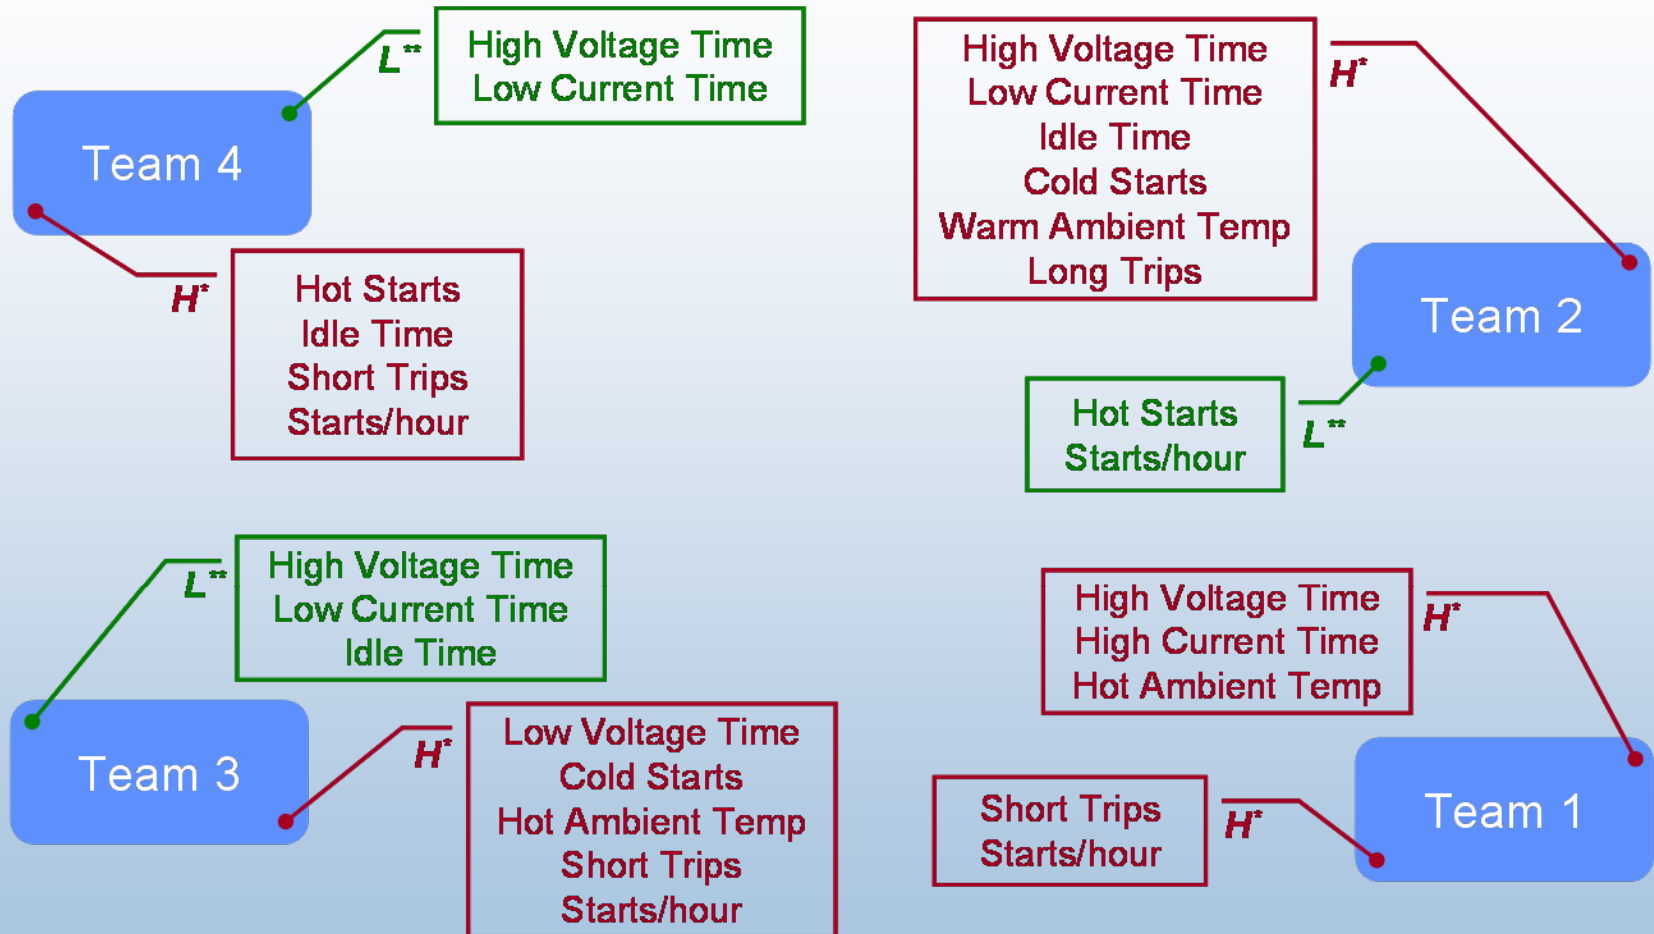

- 1) On-going fuel cell degradation study using Partial Least Squares (PLS) regression model for each team.
- 2) Teams' PLS models have a high percentage of explained decay rate variance, but the models are not robust and results are scattered.


H^* : Factor group associated with high decay rate fuel cell stacks
 L^{**} : Factor group associated with low decay rate fuel cell stacks

CDP#50: Refueling by Time of Night

Refueling by Time of Night: DOE Fleet

% of fills b/t 6 PM & 6 AM: 9.6%

Total Fill³ Events = 15158

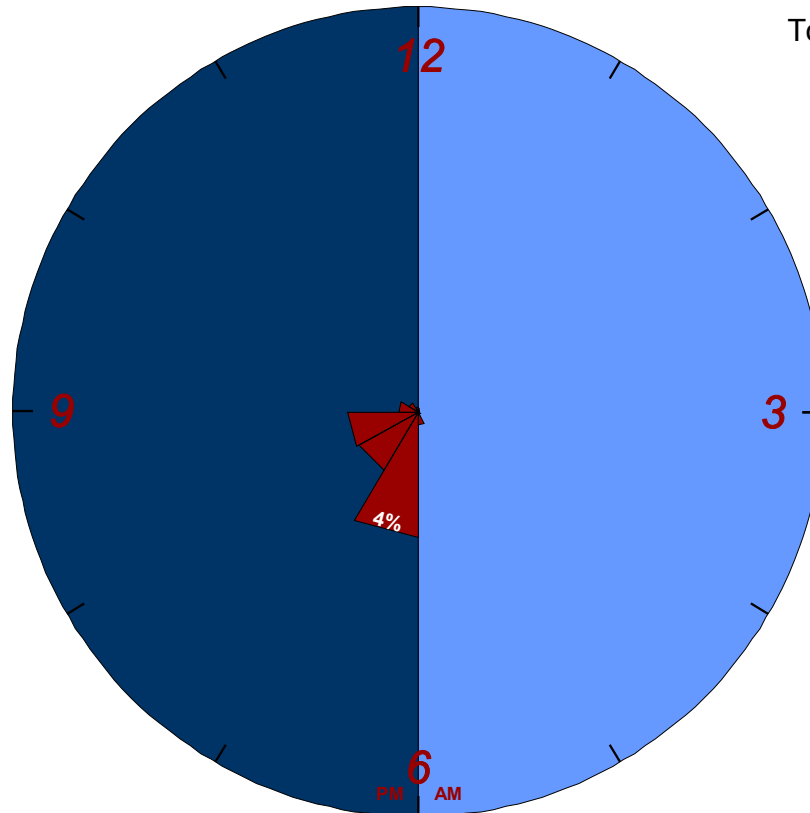

1. Fills between 6 PM & 6 AM
2. The outer arc is set at 12 % total Fill.
3. Some events not recorded/detected due to data noise or incompleteness.

Created: Sep-19-08 10:35 AM


CDP#51: Driving Start Time – Night

Driving Start Time - Night: DOE Fleet

% of driving trips b/t 6 PM & 6 AM: 11.6%

% of NHTS trips b/t 6 PM & 6 AM: 18.4%

Total Driving³ Events = 181174

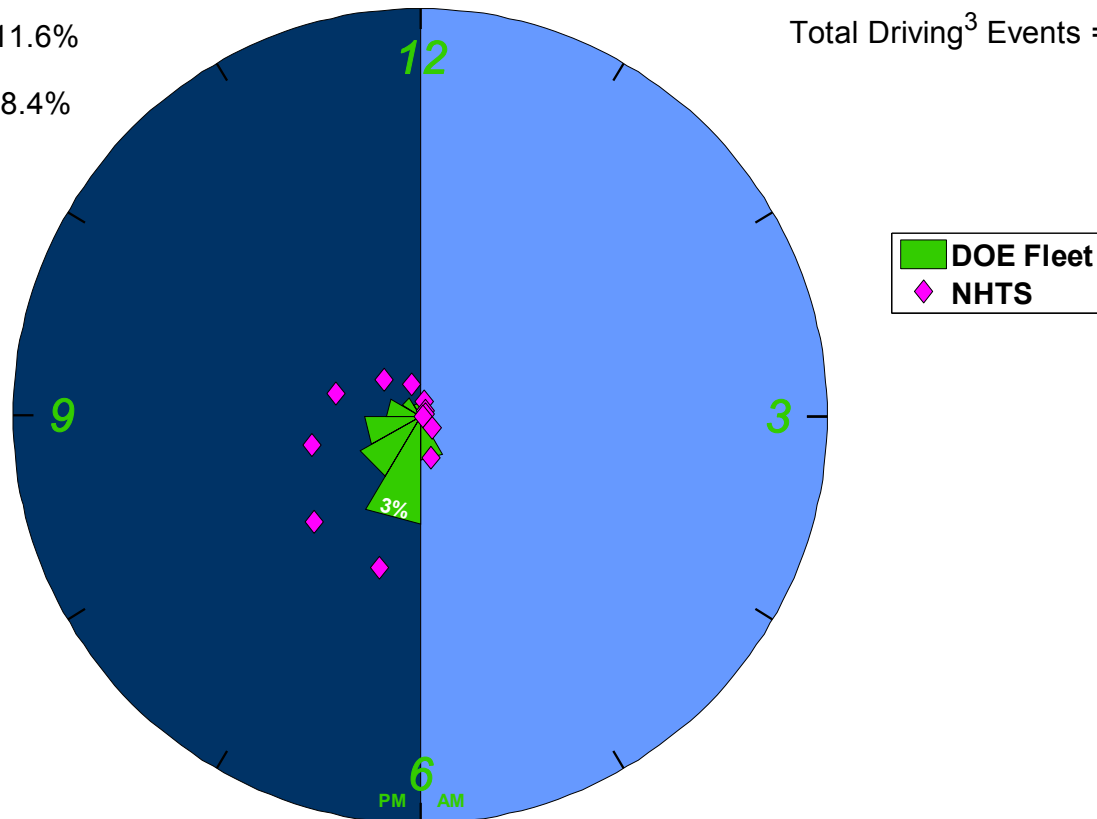


1. Driving trips between 6 PM & 6 AM
2. The outer arc is set at 12 % total Driving.
3. Some events not recorded/detected due to data noise or incompleteness.

2001 NHTS Data Includes Car, Truck, Van, & SUV day trips
ASCII.csv Source: <http://nhts.ornl.gov/download.shtml#2001>


Created: Aug-29-08 9:49 AM

CDP#52: Refueling Data by Year

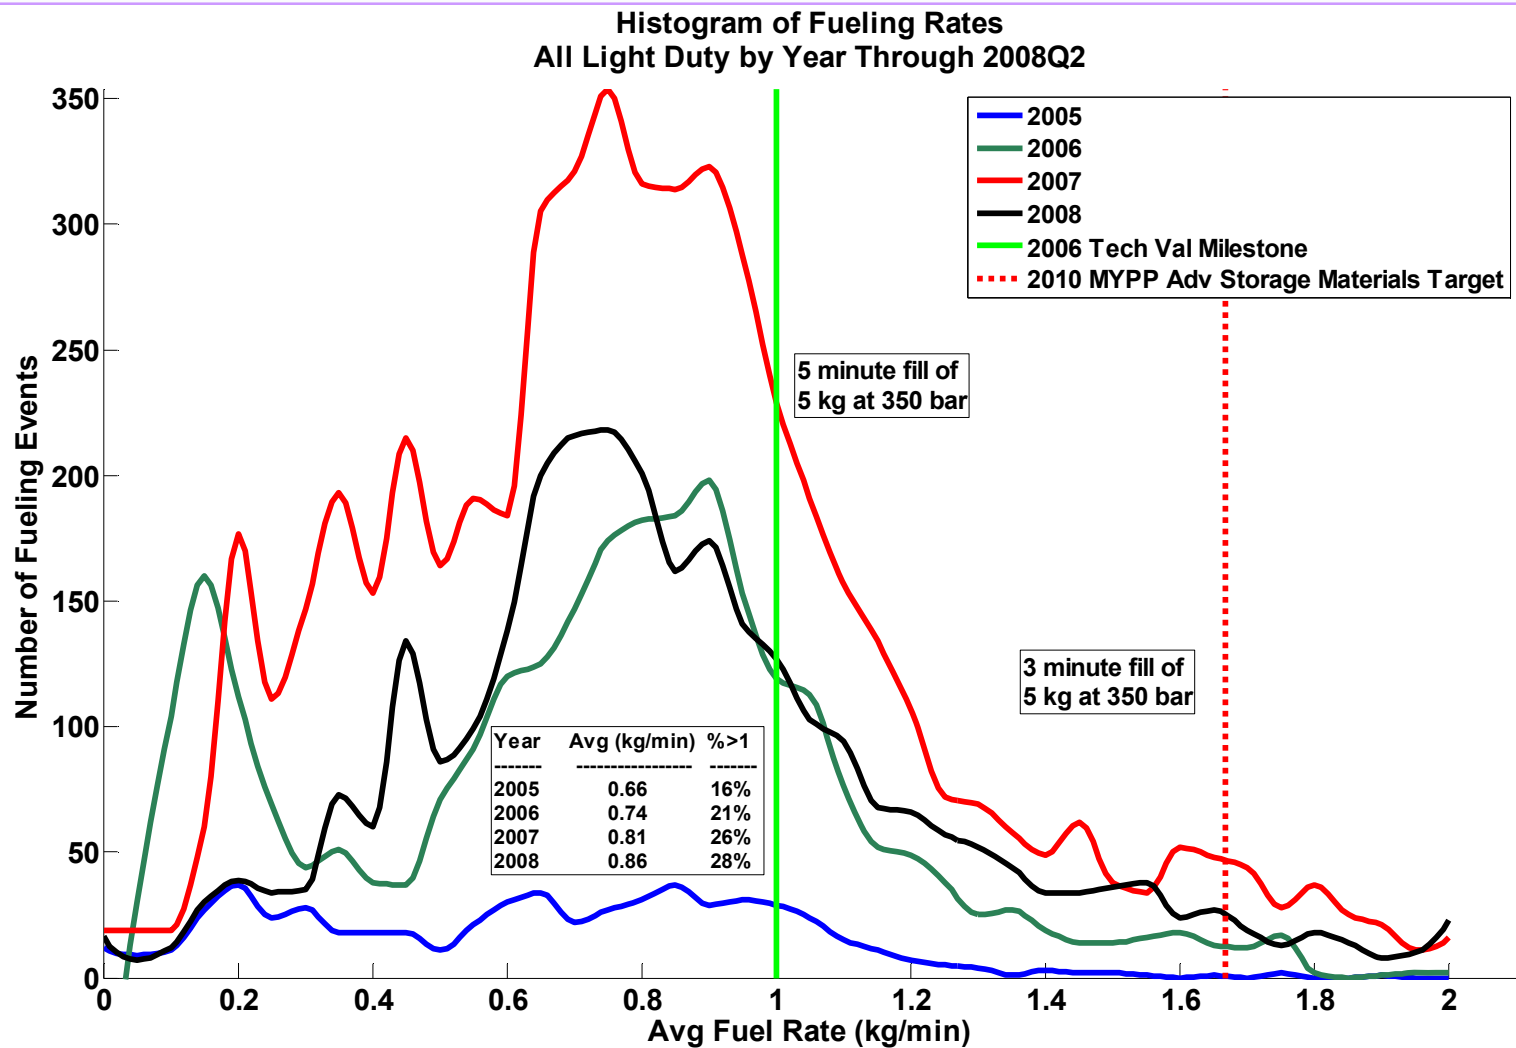


Created: Sep-02-08 4:21 PM

CDP#53: Fuel Cell System Energy within Power Levels

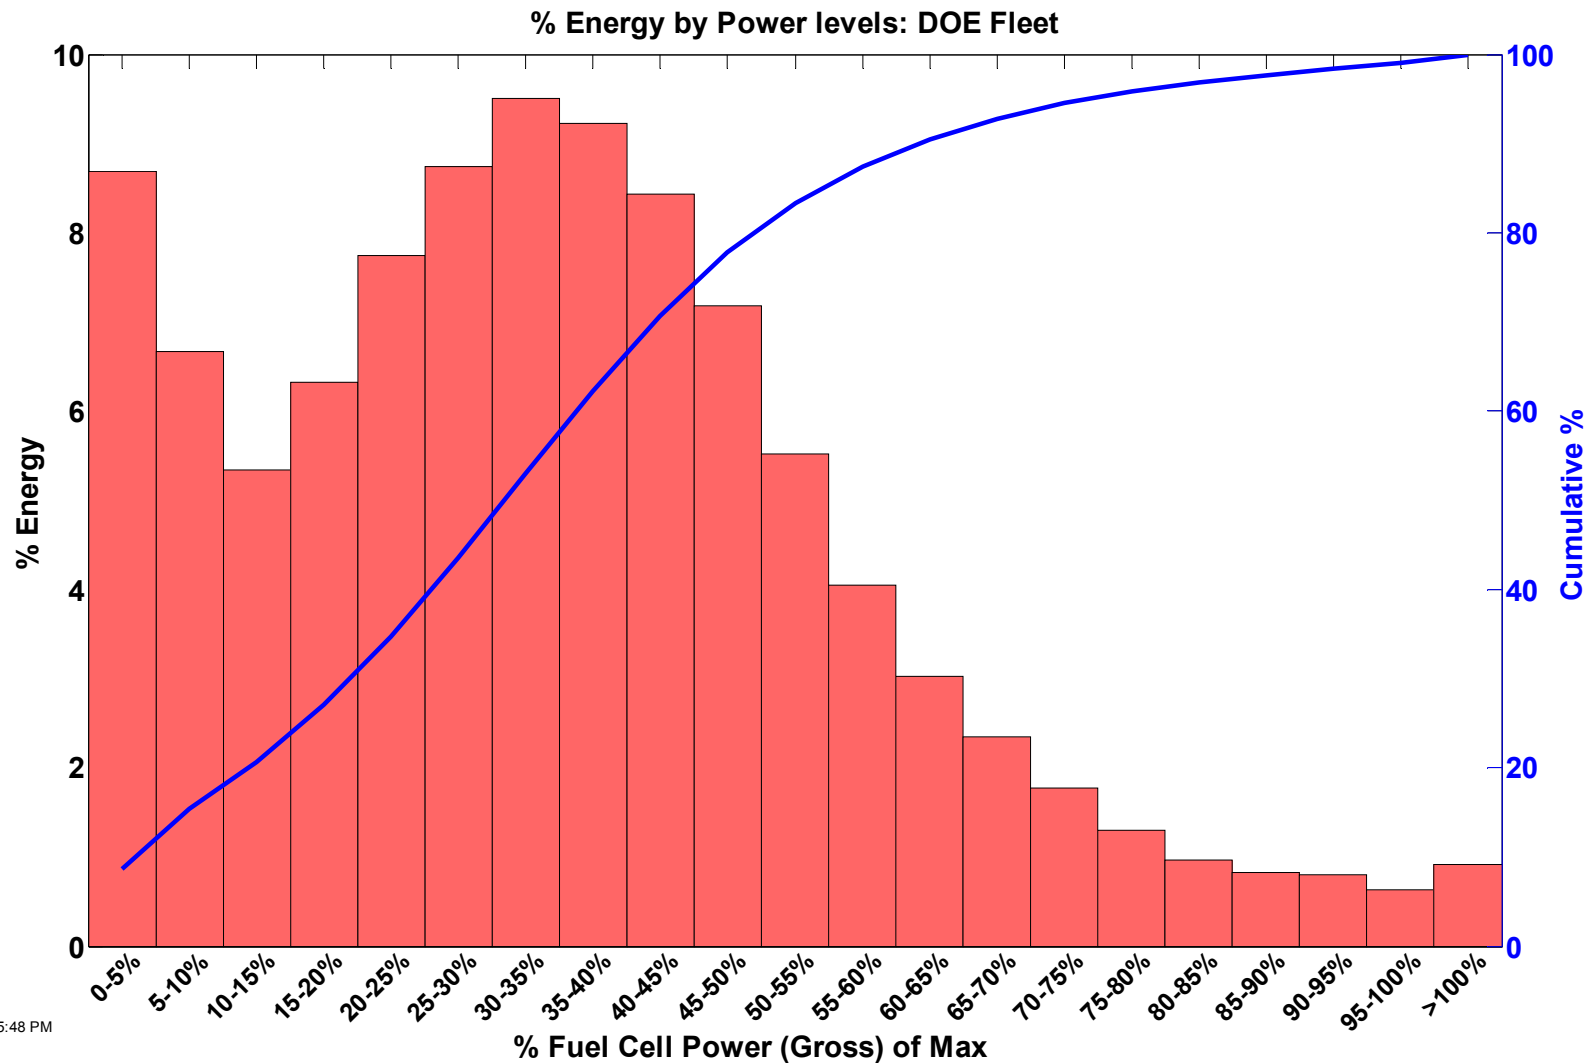


Created: Aug-28-08 5:48 PM

CDP#54: Time Between Trips

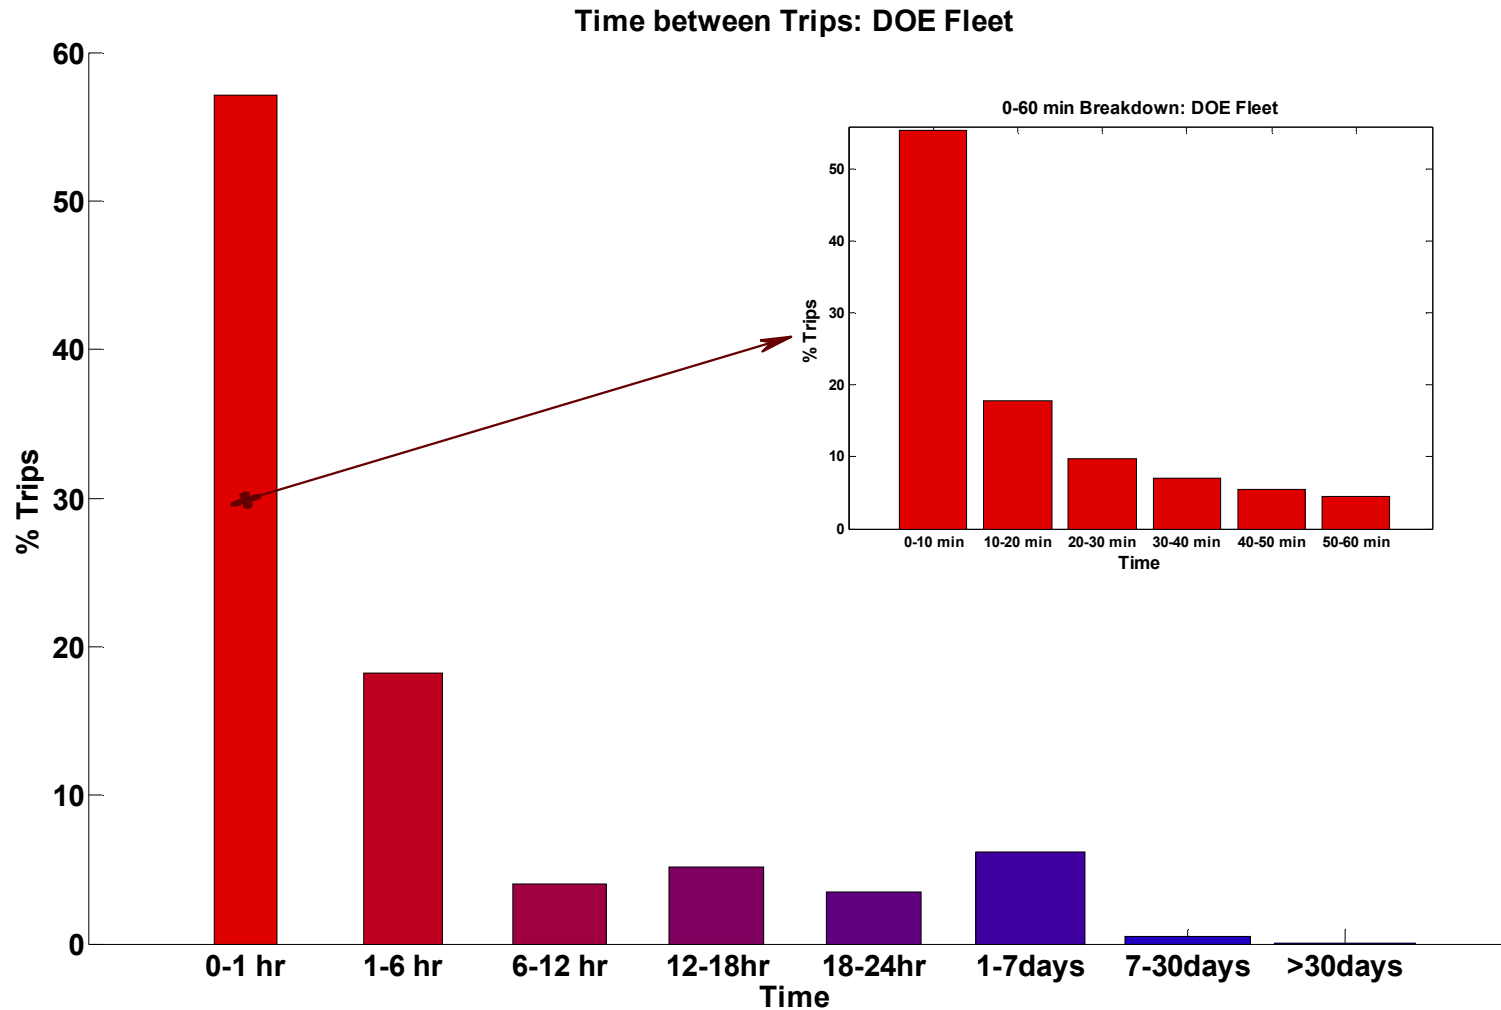


Created: Sep-03-08 11:06 AM

CDP#55: Fuel Cell System Energy

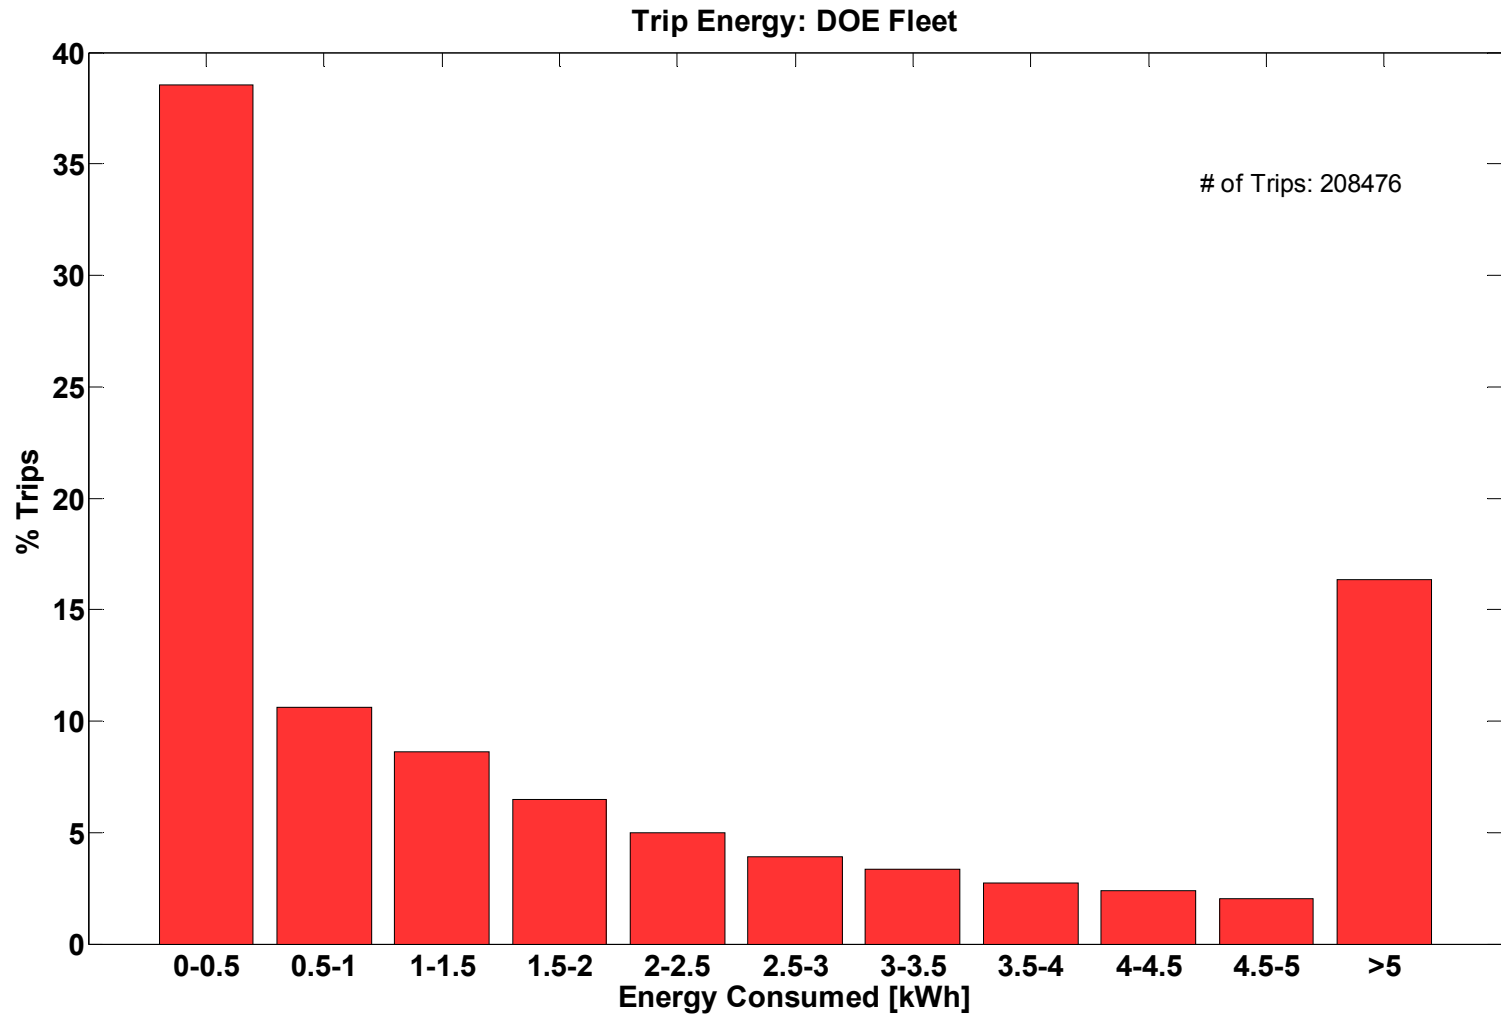

Created: Aug-28-08 5:48 PM

CDP#56: Daily Driving Distance

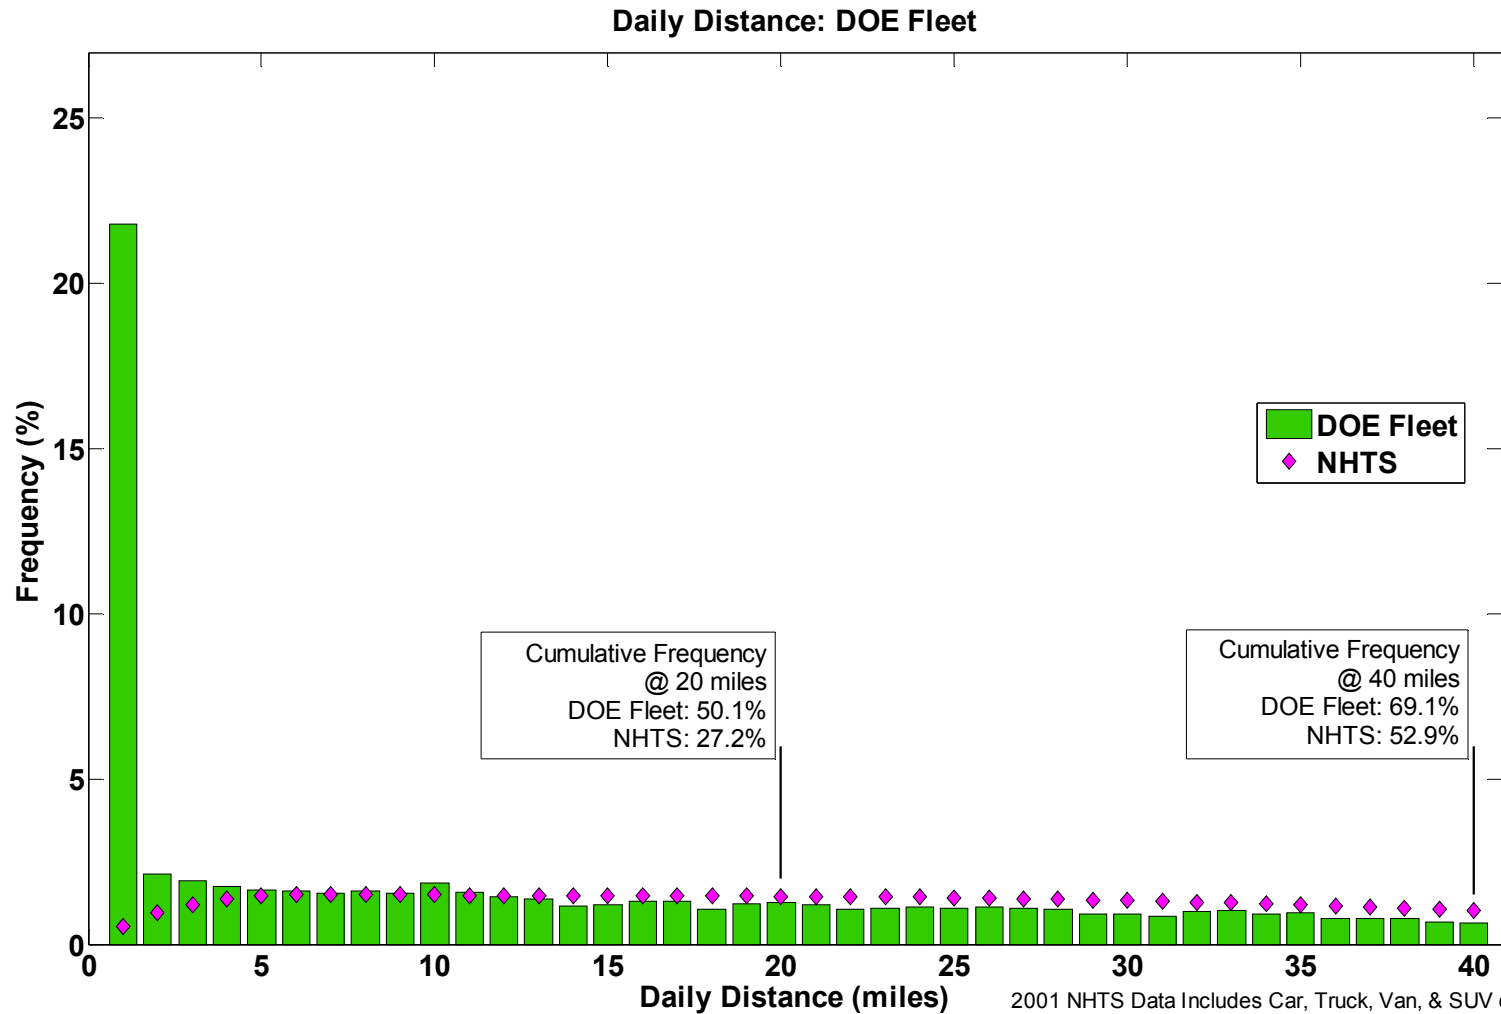


Created: Sep-03-08 11:06 AM


2001 NHTS Data Includes Car, Truck, Van, & SUV day trips
ASCII.csv Source: <http://nhts.oml.gov/download.shtml#2001>

CDP#57: H2 Storage System Mass and Volume Breakdown



Average Breakout of H2 Storage System Mass

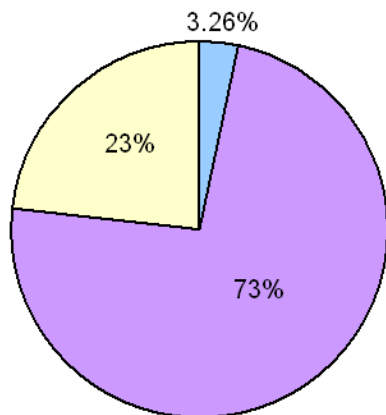

Average Breakout of H2 Storage System Volume

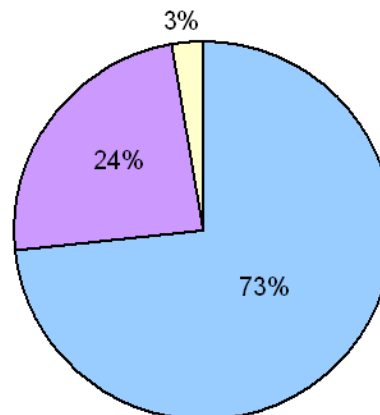

350 bar

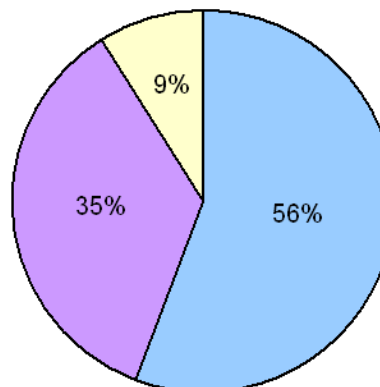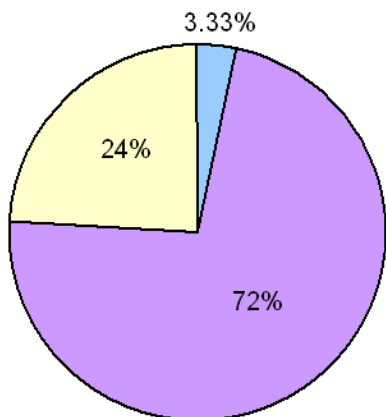


700 bar

■ H2 Mass (%)
■ Pressure Vessel Mass (%)
■ Balance of Plant Mass (%)

■ H2 Volume (%)
■ Pressure Vessel Volume (%)
■ Balance of Plant Volume (%)

Created: Aug-19-08 9:14 AM


CDP#58: Fuel Cell System Power Density

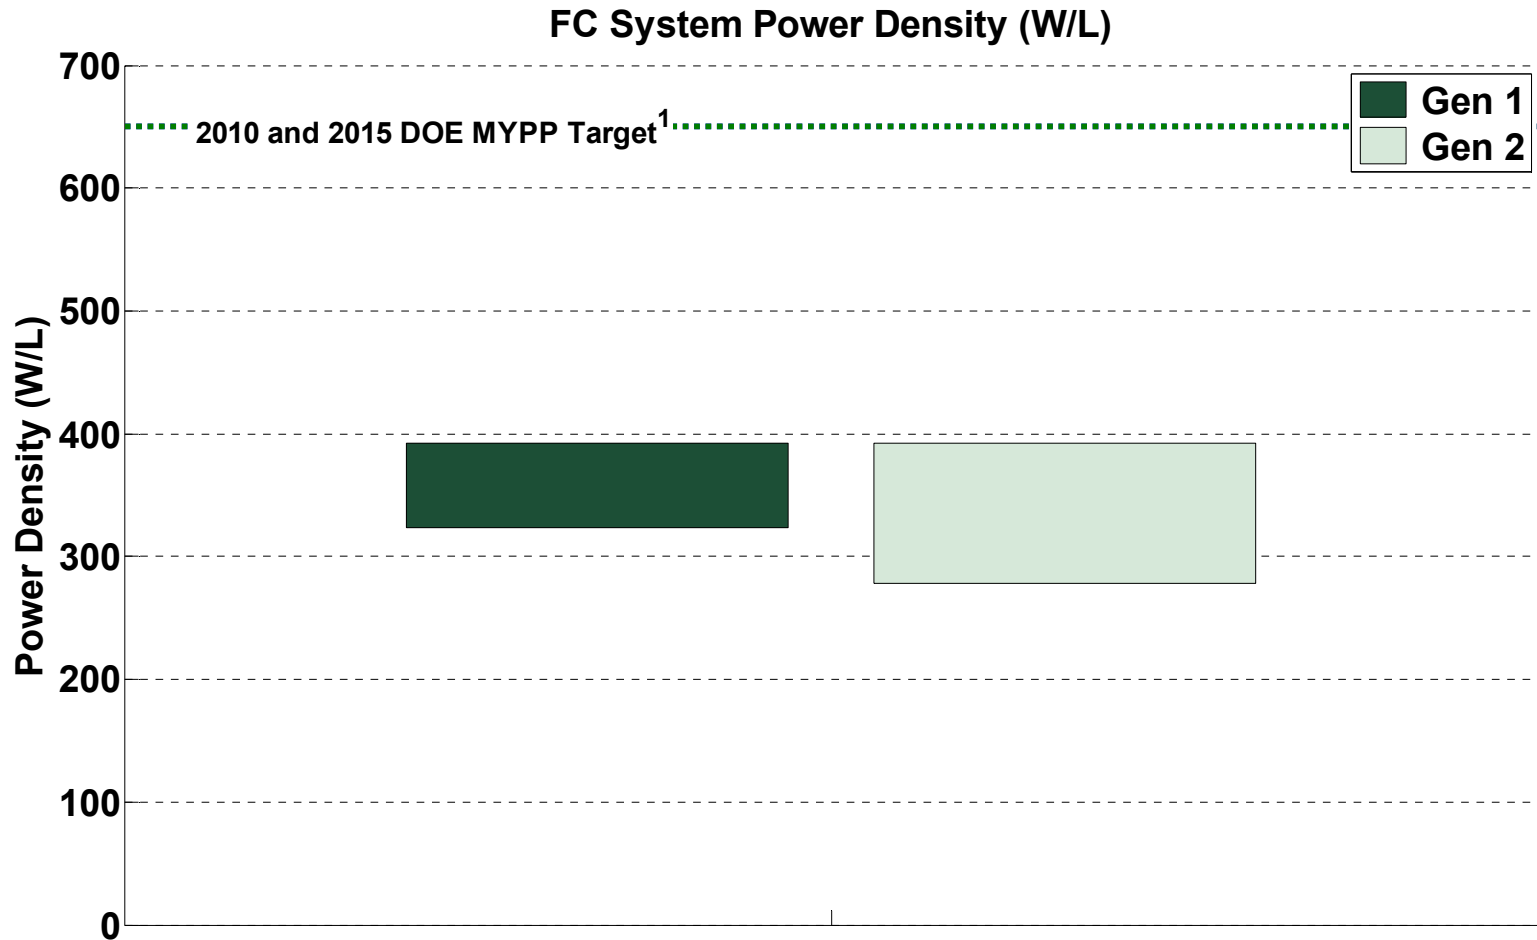

Created: Sep-17-08 10:29 AM

(1) Fuel cell system includes fuel cell stack and BOP but excludes H2 storage, power electronics, and electric drive.


CDP#59: Fuel Cell System Specific Power

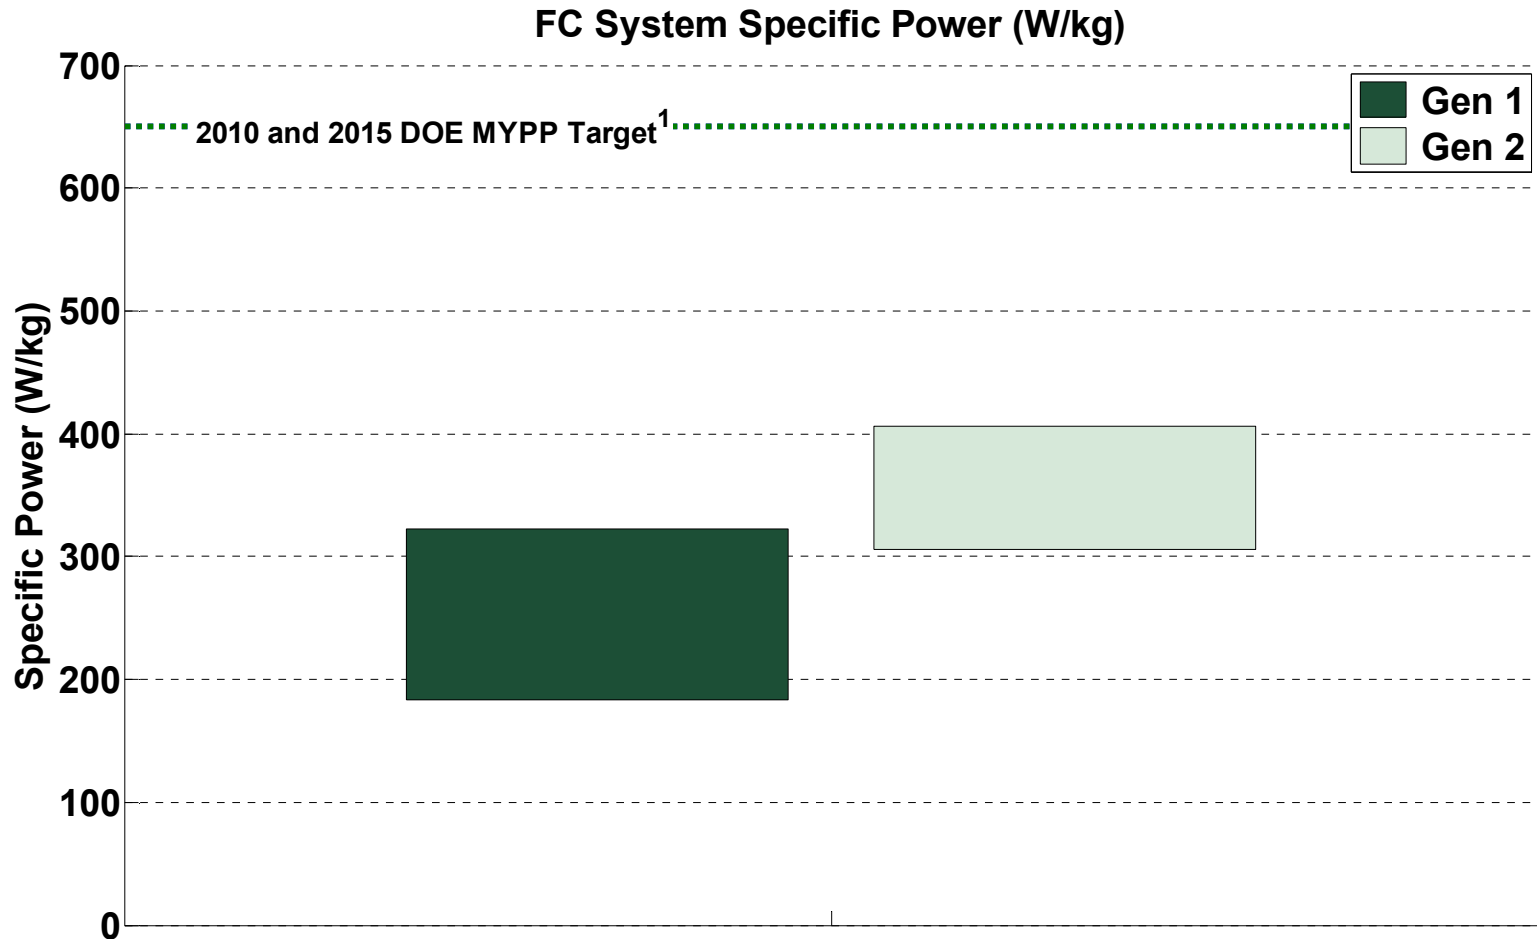

Created: Sep-17-08 10:30 AM

(1) Fuel cell system includes fuel cell stack and BOP but excludes H2 storage, power electronics, and electric drive.

CDP#60: On-Site Hydrogen Production Efficiency vs. Capacity Utilization

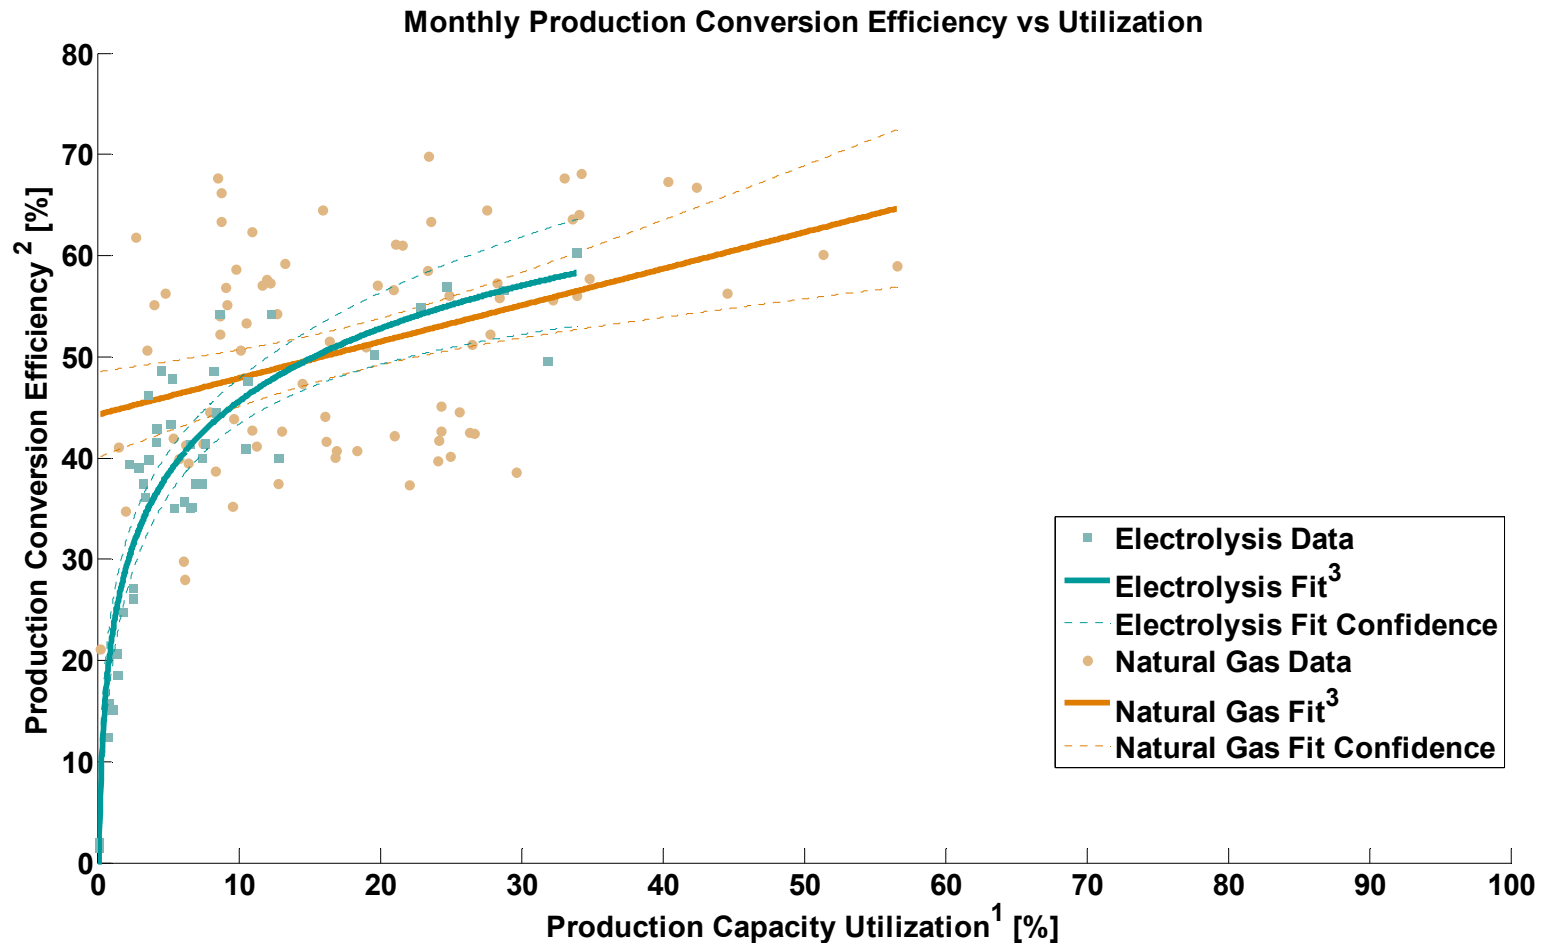


1) 100% production utilization assumes operation 24 hrs a day, 7 days a week

2) Production conversion efficiency is defined as the energy of the hydrogen out of the process (on a LHV basis) divided by the sum of the energy into the production process from the feedstock and all other energy as needed. Conversion efficiency does not include energy used for compression, storage, and dispensing.

3) High correlation with electrolysis data ($R^2 = 0.81$) & low correlation with natural gas data ($R^2 = 0.058$)

Created: Sep-24-08 4:15 PM


CDP#61: Refueling Station Compressor Efficiency

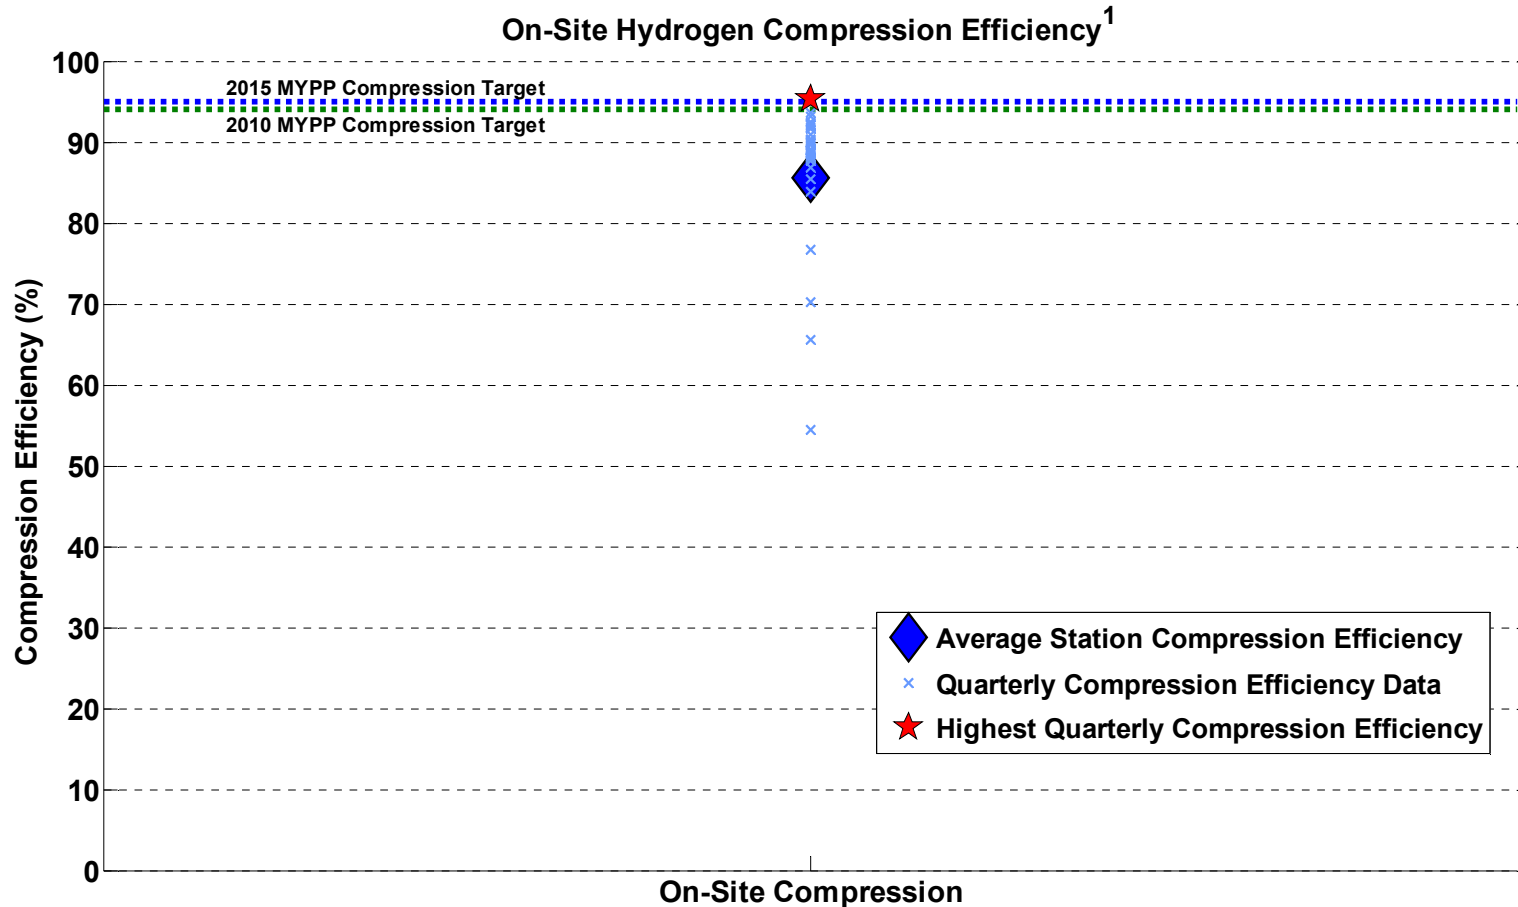

¹Consistent with the MYPP, compression efficiency is defined as the energy of the hydrogen out of the process (on an LHV basis) divided by the sum of the energy of the hydrogen output plus all other energy needed for the compression process. Data shown for on-site hydrogen production and storage facilities only, not delivered hydrogen sites.

Created: Sep-03-08 4:45 PM

CDP#62: Learning Demonstration Vehicle Greenhouse Gas Emissions

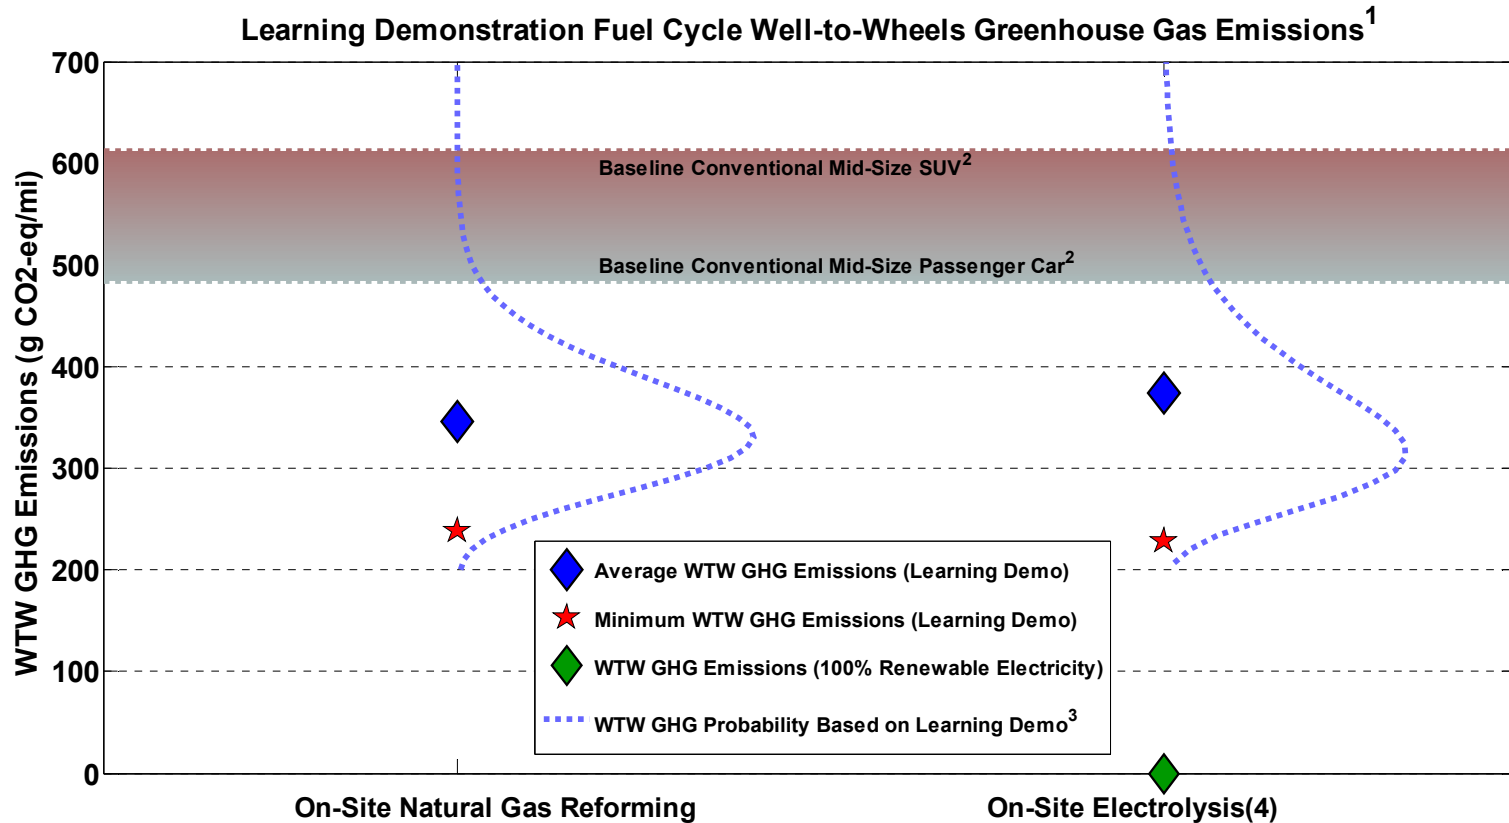

1. Well-to-Wheels greenhouse gas emissions based on DOE's GREET model, version 1.8b. Analysis uses default GREET values except for FCV fuel economy, hydrogen production conversion efficiency, and electricity grid mix. Fuel economy values are the Gen 1 and Gen 2 window-sticker fuel economy data for all teams (as used in CDP #6); conversion efficiency values are the production efficiency data used in CDP #13.
2. Baseline conventional passenger car and light duty truck GHG emissions are determined by GREET 1.8b, based on the EPA window-sticker fuel economy of a conventional gasoline mid-size passenger car and mid-size SUV, respectively. The Learning Demonstration fleet includes both passenger cars and SUVs.
3. The Well-to-Wheels GHG probability distribution represents the range and likelihood of GHG emissions resulting from the hydrogen FCV fleet based on window-sticker fuel economy data and monthly conversion efficiency data from the Learning Demonstration.
4. On-site electrolysis GHG emissions are based on the average mix of electricity production used by the Learning Demonstration production sites, which includes both grid-based electricity and renewable on-site solar electricity. GHG emissions associated with on-site production of hydrogen from electrolysis are highly dependent on electricity source. GHG emissions from a 100% renewable electricity mix would be zero, as shown. If electricity were supplied from the U.S. average grid mix, average GHG emissions would be 1296 g/mile.

Created: Sep-24-08 4:19 PM

REPORT DOCUMENTATION PAGE

Form Approved
OMB No. 0704-0188

The public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing the burden, to Department of Defense, Executive Services and Communications Directorate (0704-0188). Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.

PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ORGANIZATION.

1. REPORT DATE (DD-MM-YYYY) October 2008		2. REPORT TYPE Technical Report		3. DATES COVERED (From - To)	
4. TITLE AND SUBTITLE Controlled Hydrogen Fleet and Infrastructure Demonstration and Validation Project: Fall 2008				5a. CONTRACT NUMBER DE-AC36-99-GO10337	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S) K. Wipke, S. Sprik, J. Kurtz, and T. Ramsden				5d. PROJECT NUMBER NREL/TP-560-44256	
				5e. TASK NUMBER H2708100	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) National Renewable Energy Laboratory 1617 Cole Blvd. Golden, CO 80401-3393				8. PERFORMING ORGANIZATION REPORT NUMBER NREL/TP-560-44256	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S) NREL	
				11. SPONSORING/MONITORING AGENCY REPORT NUMBER	
12. DISTRIBUTION AVAILABILITY STATEMENT National Technical Information Service U.S. Department of Commerce 5285 Port Royal Road Springfield, VA 22161					
13. SUPPLEMENTARY NOTES					
14. ABSTRACT (Maximum 200 Words) Graphs of composite data products produced by DOE's Controlled Hydrogen Fleet and Infrastructure Demonstration and Validation project through September 2008.					
15. SUBJECT TERMS hydrogen; hydrogen demonstration; hydrogen validation					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT UL	18. NUMBER OF PAGES	19a. NAME OF RESPONSIBLE PERSON
a. REPORT Unclassified	b. ABSTRACT Unclassified	c. THIS PAGE Unclassified			19b. TELEPHONE NUMBER (Include area code)