



# A Practical Irradiance Model for Bifacial PV Modules

**Bill Marion**

Sara MacAlpine, Chris Deline (NREL)

Amir Asgharzadeh, Fatima Toor (University of Iowa)

Daniel Riley, Joshua Stein, Clifford Hansen (Sandia)

June 28, 2017

44<sup>th</sup> IEEE Photovoltaic Specialist Conference, Washington, D.C.

[NREL/PR-5J00-68678](#)

- Bifacial PV modules use radiation received by both the front and back surfaces, but only irradiance models for the front surface are fully developed and validated.
- This work developed a backside irradiance model and compared model estimates with backside irradiance measurements using reference cells installed on the backside of PV systems at NREL and Sandia.

# Model Overview

- Similar to models for the front side, configuration factors (*CFs*) are used. (The fraction of irradiance received from a source).
- Irradiance received by ground corrected for shadows and restricted view of the sky using array geometry.
- Irradiance corrected for AOI (beam & diffuse).
- Irradiances calculated for each row of cells in panel.
- Edge effects not considered.




# Front Side Sky and Ground-Reflected Irradiance

$$I_{\text{sky}} = \text{DHI} \cdot (1 + \cos \beta) / 2$$

$CF$  ↗


$$I_r = \rho \cdot \text{GHI} \cdot (1 - \cos \beta) / 2$$

$CF$  ↗

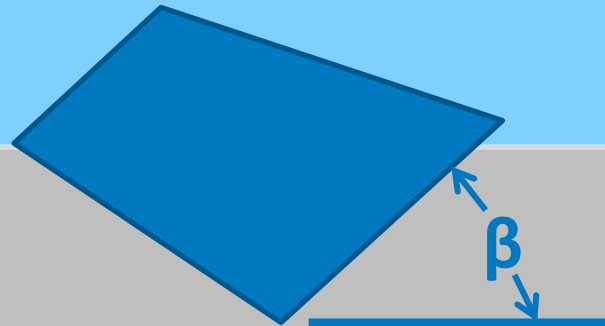

# Backside Sky and Ground-Reflected Irradiance


- *CFs* may also be used for the backside
- But only if the irradiance is the same intensity over the field-of-view

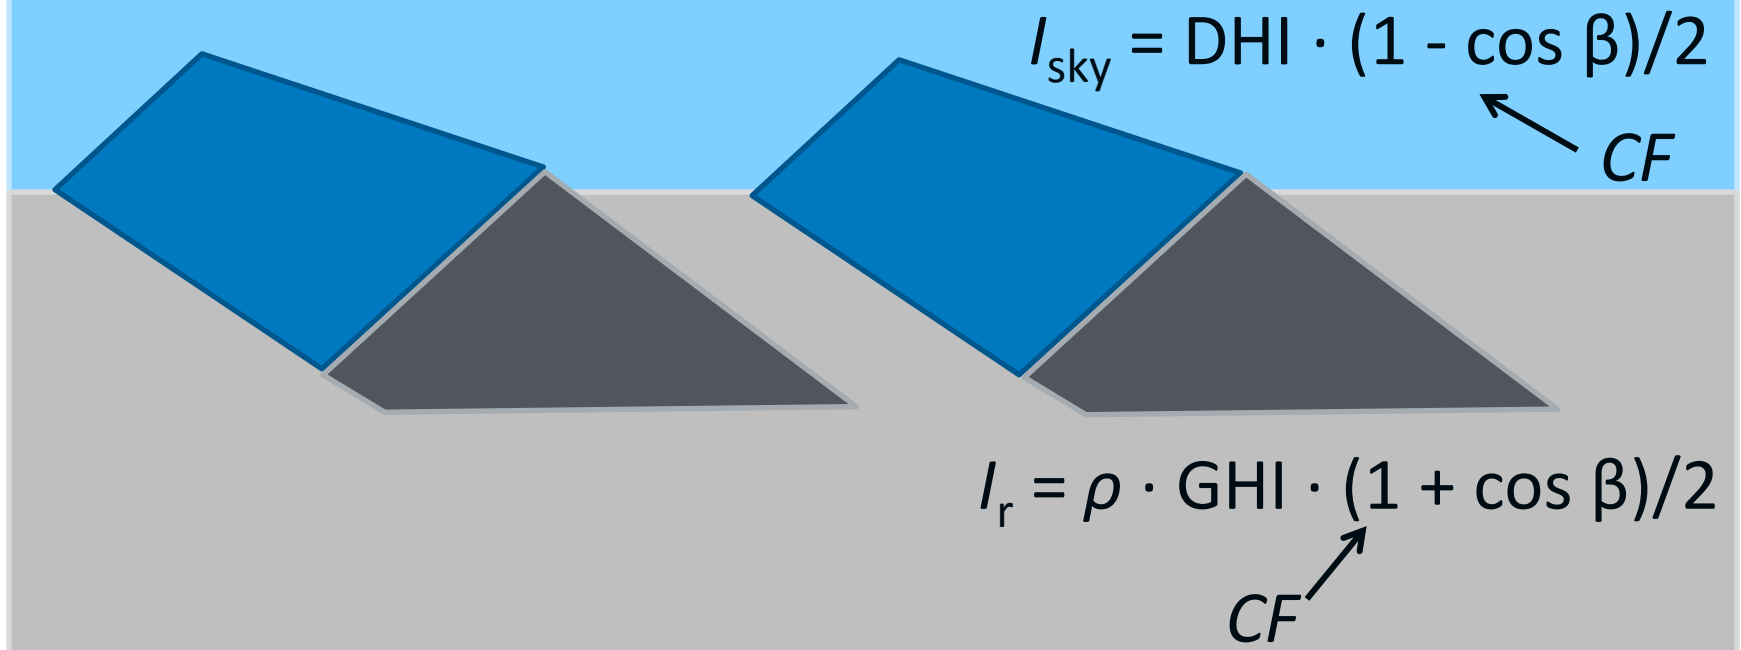

# CFs Using Field-of-View Angles

- Permits determining the contribution of each source of irradiance (shaded or unshaded ground, module reflections, etc.)

$$CF = (\cos \theta_1 - \cos \theta_2)/2$$

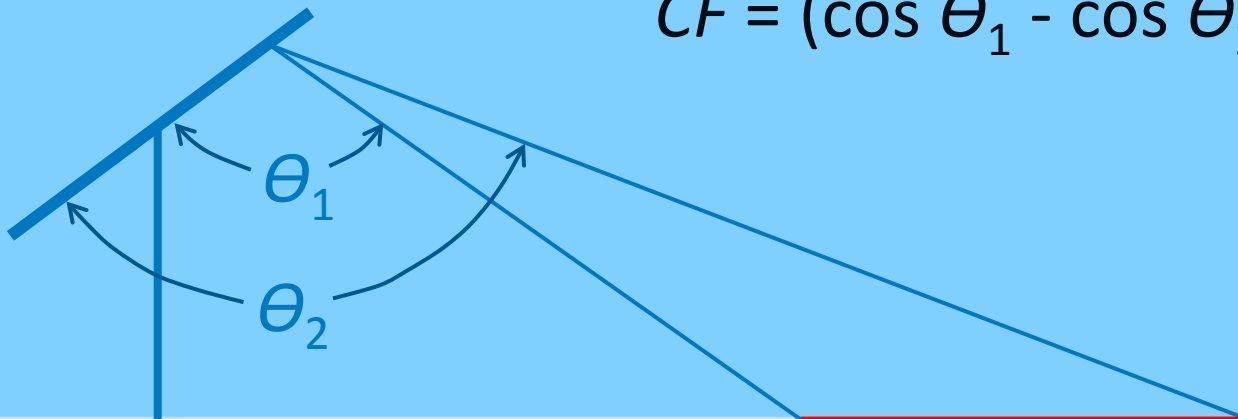

# Irradiance Received by Ground Varies with Location

- Ground irradiance (GRI) is reduced by shadows and by the array reducing the view of sky
- Calculated at 100 locations in the row-to-row dimension


$$\text{GRI} = a \cdot (\text{DNI} + I_{\text{cir}}) + CF_{\text{sky}} \cdot I_{\text{sky}}$$

where:

$a$  is the cosine of the sun zenith angle if the ground segment is unshaded. If shaded,  $a$  is the cosine of the sun zenith angle multiplied by the fractional opening of the PV array due to gaps between PV cells and modules.

# $CF_{sky}$ Depends on Location in Row-to-Row Dimension


$$CF_{sky} = (\cos \theta_{s1} - \cos \theta_{s2})/2$$

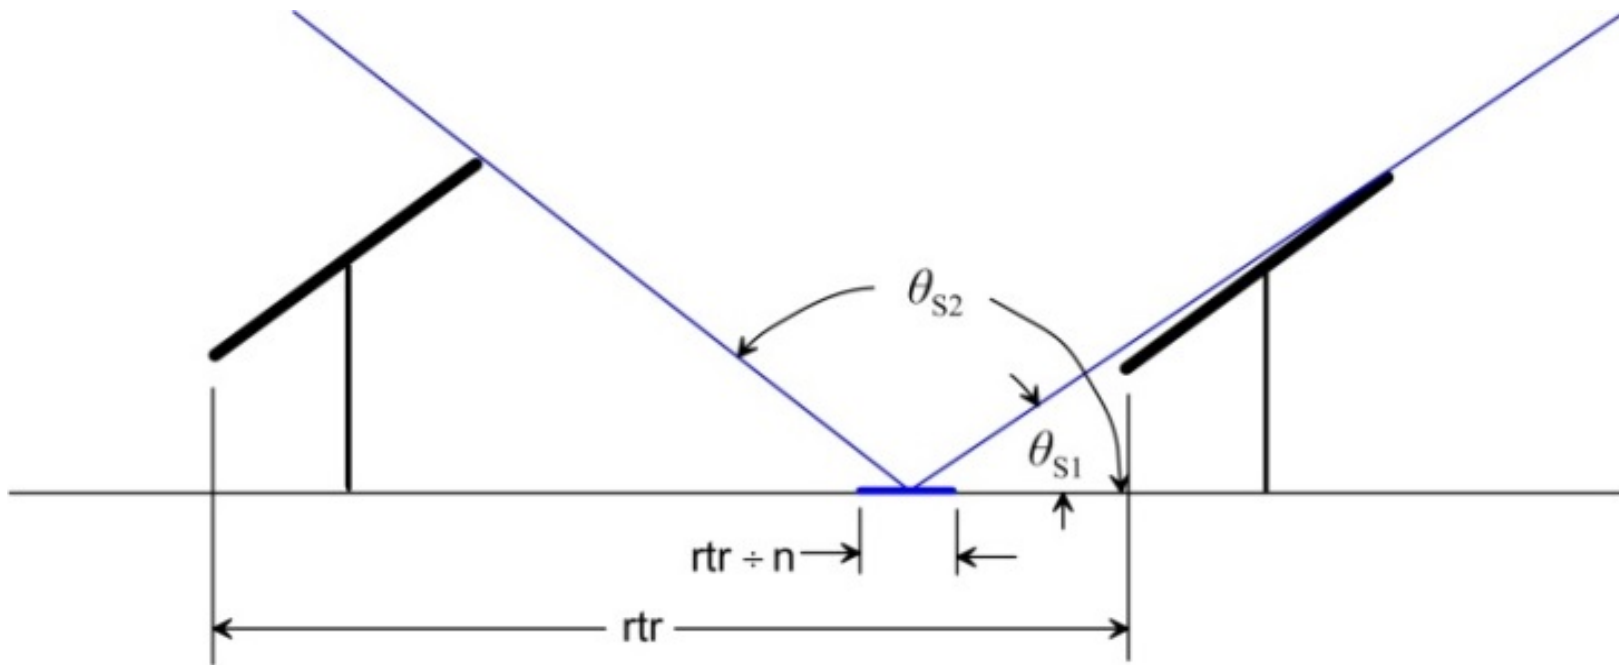



# Calculating the Backside Irradiance (BSI)

- Summed over 180° field-of-view using one degree increments

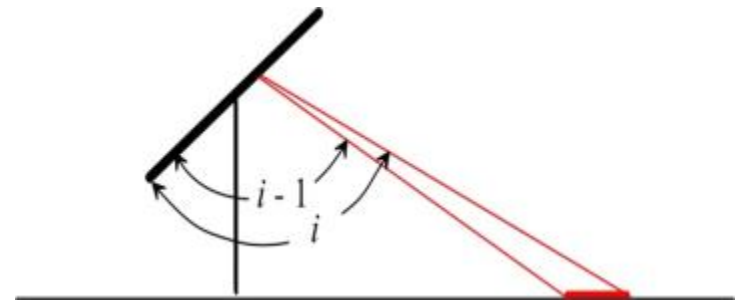


$$BSI = b \cdot F_b \cdot (DNI + I_{cir}) + \sum_{i=1}^{180^\circ} CF_i \cdot F_i \cdot I_i$$

where  $b$  = maximum (0, cosine of the AOI of the DNI);  
 $F_b$  and  $F_i$  are AOI corrections for the beam and diffuse<sup>1</sup>;  
and  $I_i$  is the irradiance viewed by the  $i$ th one-degree segment (either  $I_{sky}$ ,  $I_{hor}$ ,  $\rho \cdot GRI_n$ , or  $I_{refl}$ ).

<sup>1</sup>B. Marion, “Numerical method for angle-of-incidence correction factors for diffuse radiation incident photovoltaic modules”, *Solar Energy* 147: 344–348, 2017.


# Validation Data

- Model Input – Direct Normal Irradiance (DNI) and Diffuse Horizontal Irradiance (DHI), used with Perez model to derive circumsolar, sky, and horizon diffuse.
- Measured backside irradiances for NREL and Sandia systems.

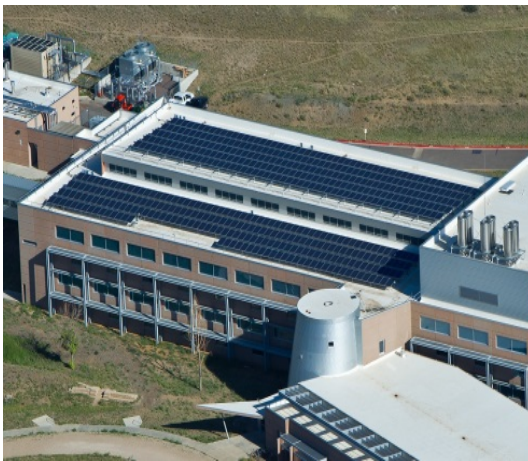


# Validation Results – NREL Site

- Better results for upper roof than for lower roof.
- Off south azimuth shifts BSI peak values.

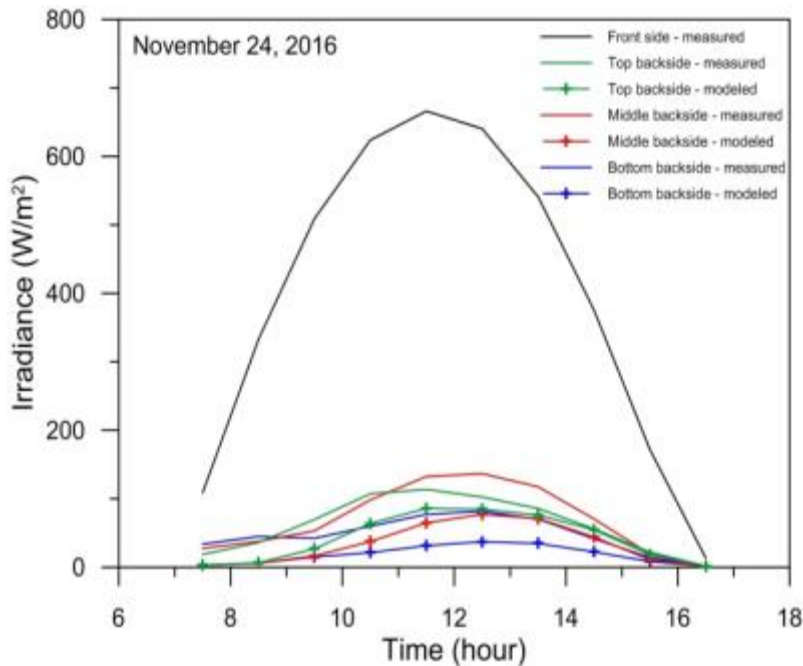


Lower Roof

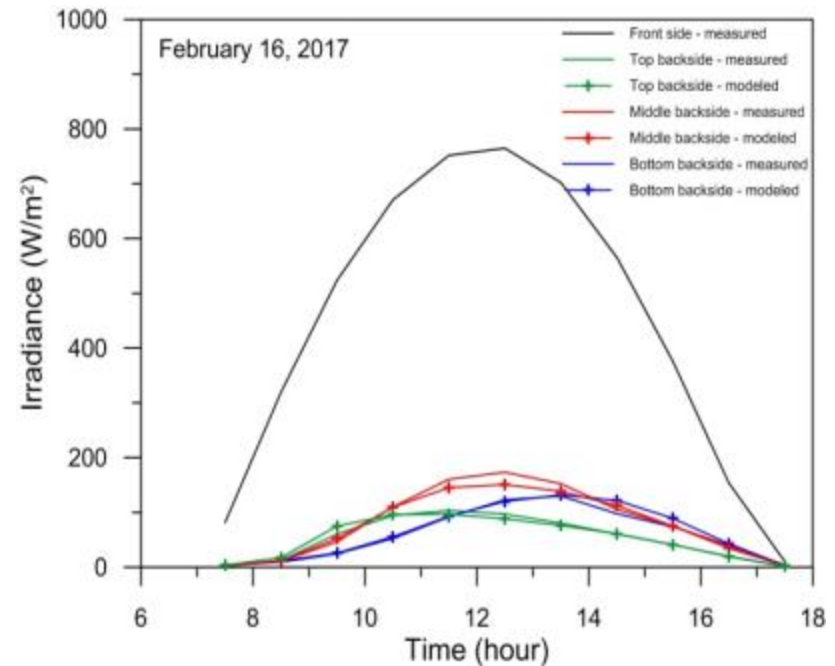

Upper Roof

# Validation Results – Sandia Site

- Data for 10/1/2016 thru 3/31/2017 – 15 minute averages.
- Mean for bottom reference cell was 10% of front side.
- Mean for top reference cell was 7% of front side.
- Model MBD ranged from -4 to 9 W/m<sup>2</sup>, -9 to 16%.
- Model RMSD ranged from 5 to 16 W/m<sup>2</sup>, 14 to 31%.

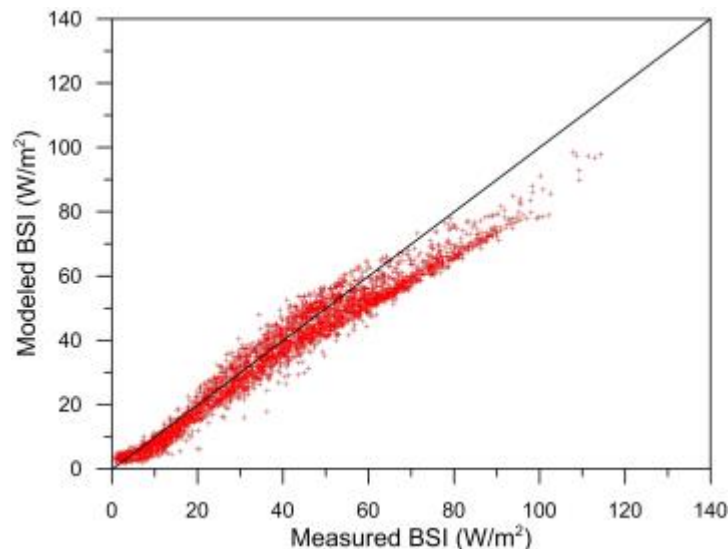


Modeled Versus Measured BSI for Top Reference Cell in 35° Tilt Row

# Validation Results – Sandia Site (continued)

BSI plus front side irradiance – total irradiance to PV cell.

- Model MBD ranged from -11 to 14 W/m<sup>2</sup>, -1.8 to 2.4%.
- Model RMSD ranged from 25 to 36 W/m<sup>2</sup>, 4 to 6%.


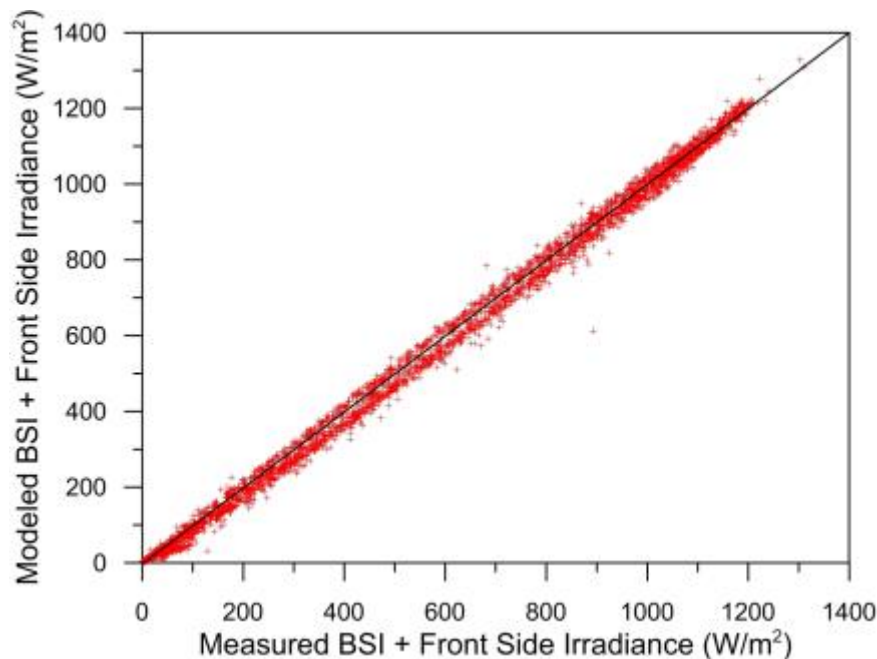


Modeled Versus Measured BSI Plus Front Side Irradiance for Top Location in 35° Tilt Row



# Summary

- The backside irradiance model for bifacial PV systems uses configuration factors, and accounts of the effects of shading, restricted view of the sky, and angle-of-incidence for both beam and diffuse radiation.
- The model was validated using data from NREL and Sandia.
- The model MBD for the total irradiance available to the PV cell (BSI plus front side irradiance) was within  $\pm 2.5\%$ .

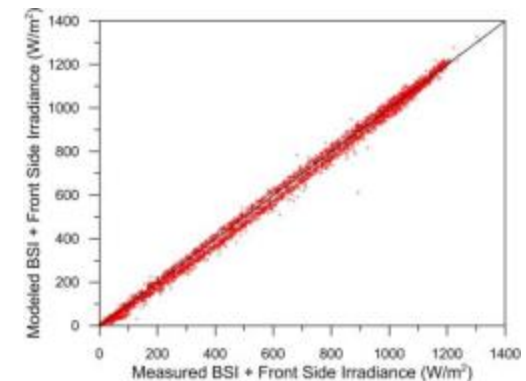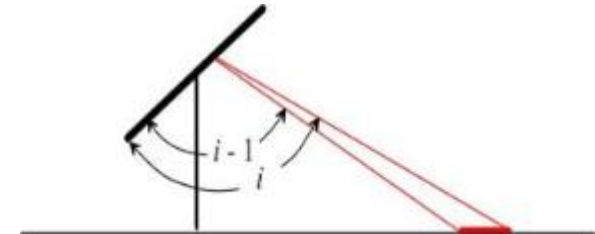

# Questions?

[www.nrel.gov](http://www.nrel.gov)

