


Robust PV Degradation Methodology and Application

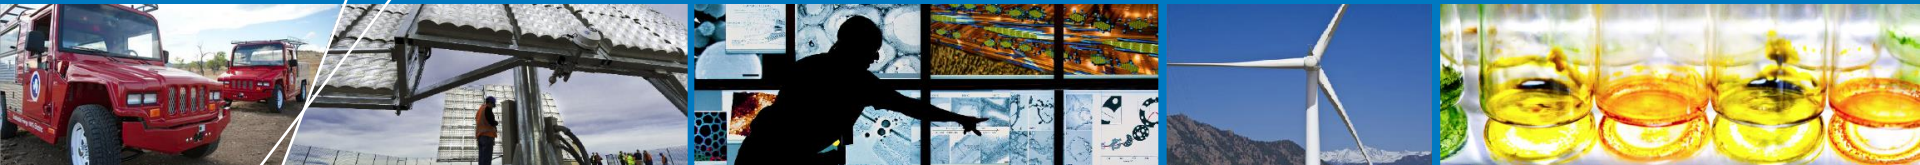

44th IEEE Photovoltaic Specialist Conference

Washington, DC, 6/27/2017

Dirk Jordan, Chris Deline, Sarah Kurtz – NREL


Greg Kimball and Mike Anderson - Sunpower

NREL/PR-5J00-70481

Outline

- ❖ **Motivation:** *Why “this the best since sliced bread” (1928)*
- ❖ **Method:** *How we slice the bread.*
- ❖ **Common headaches:** *Works even if the bread has problems.*
- ❖ **Findings:** *Application to different types of bread.*

Challenge of field data - low signal/noise ratio

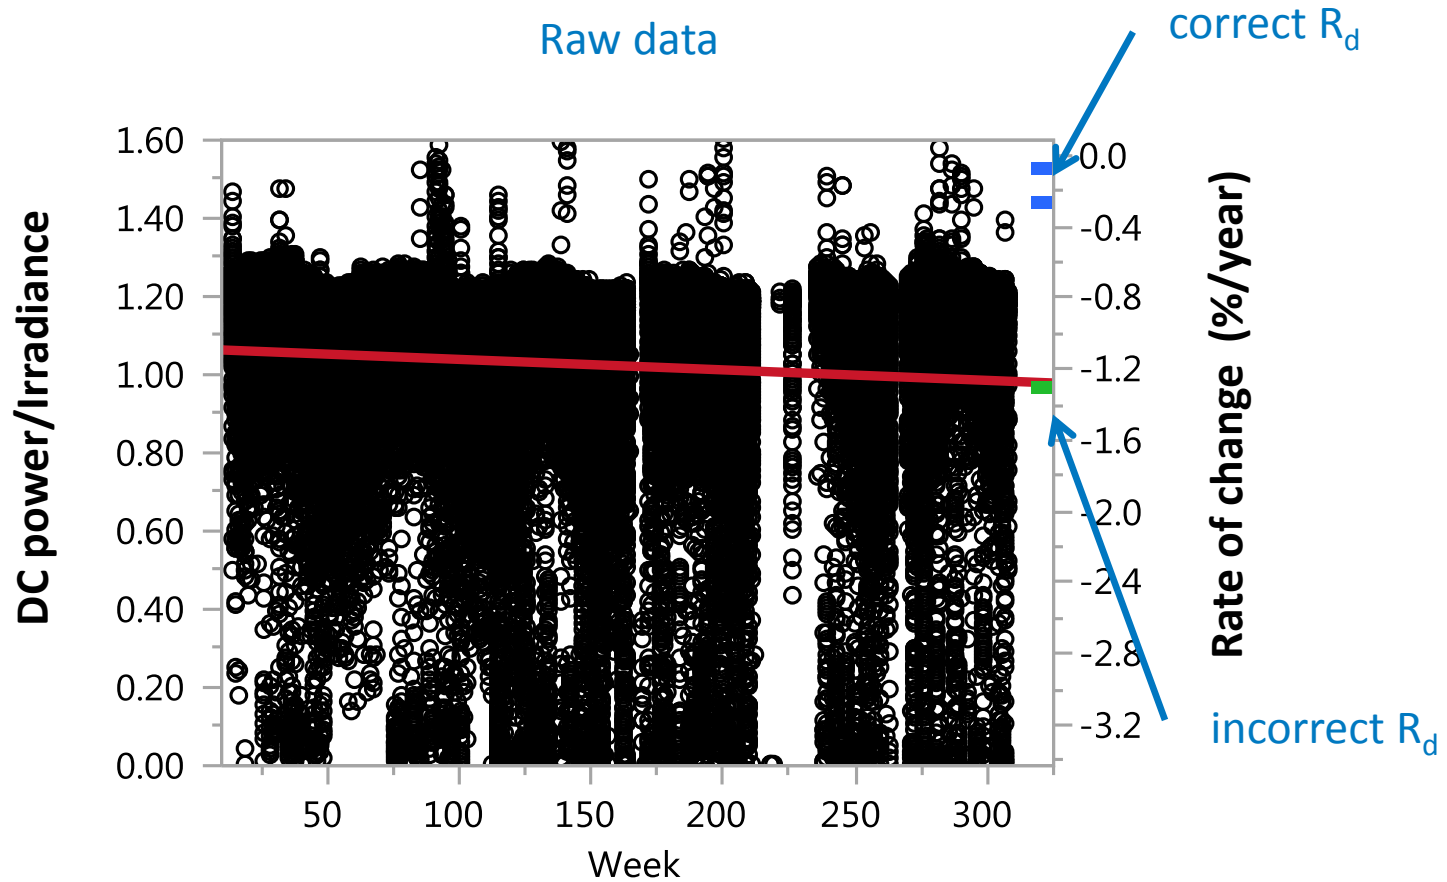

How do we do this?



Method

How to slice the bread



Marriage of 2 ideas: Year-on-year + clear-sky


Year-on-year (YOY)^{1,2}

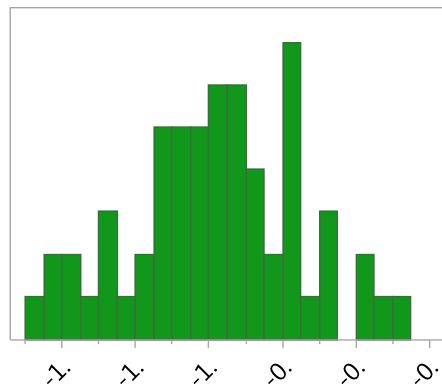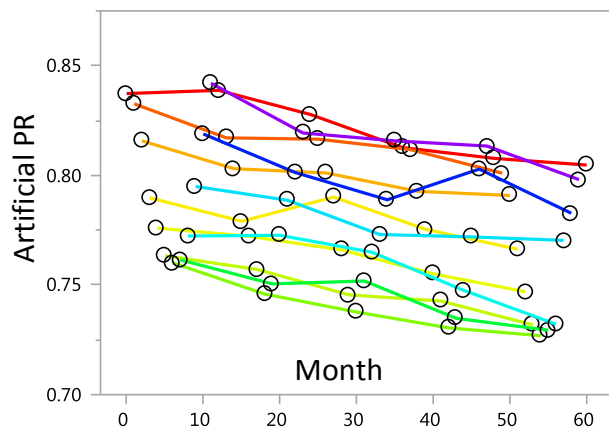

Degradation rate (%/year)

68%, 95% Confidence interval:
Bootstrap distribution

Clear sky modeling^{3,4}

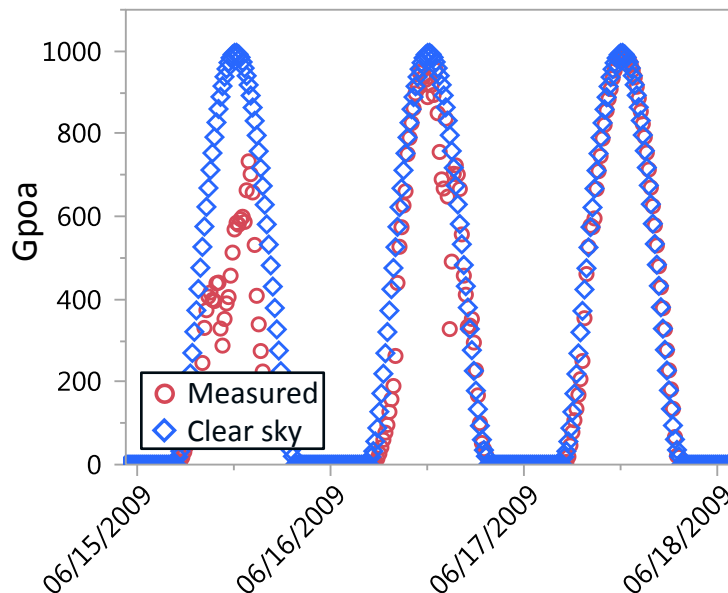

- Clear sky irradiance models report the expected solar resource under clear conditions
- Transposition of the data converts to plane-of-array (POA) irradiance
- PVLIB provides an open-source clear sky model

¹Hasselbrink et al., 39th PVSC, Tampa, FL, USA, 2013.



²Jordan et al., 43rd PVSC, Portland, OR, USA, 2016.

³Holmgren et al., 42nd PVSC, New Orleans, LA, 2015.

⁴Stein et al., 43rd PVSC, Portland, OR, 2016.

Model clear-sky temperature

Temperature

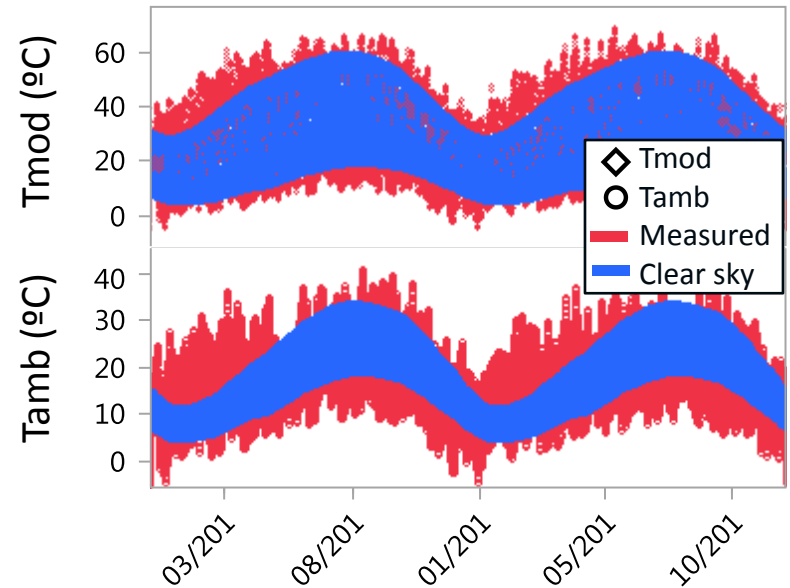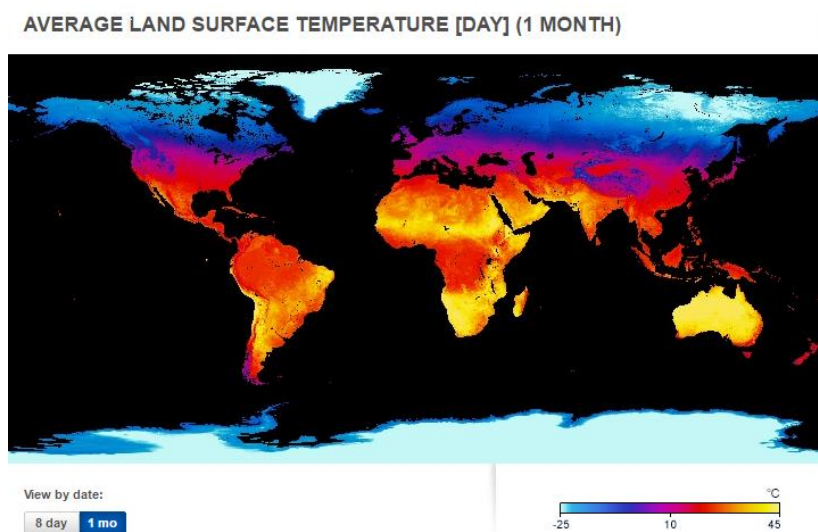

Near Earth Observation (NEO) provides average ambient day and night temperature based on climate models

Cell temperature is a function of ambient temperature and irradiance

Source data from Nasa Earth Observatory, derived from MODIS
Available at: https://github.com/kwhanalytics/rdtools/tree/clearsky_temperature





Final modeling details

Normalize performance ratio (PR)

$$PR = \frac{[P_{DC} (kW)]}{P_{PSTC, rated} * \frac{\left[\text{Irradiance POA} \left(\frac{W}{m^2} \right) \right]}{1000 \left(\frac{W}{m^2} \right)} * (1 + \gamma_{tempco} * ([T_{cell}] - T_{ref}))}$$



$$PR_{CS} = \frac{[P_{DC} (kW)]}{P_{STC, rated} * \frac{\left[\text{Clear Sky Irradiance POA} \left(\frac{W}{m^2} \right) \right]}{1000 \left(\frac{W}{m^2} \right)} * (1 + \gamma_{tempco} * ([T_{clear sky cell}] - T_{ref}))}$$

Minimally filter out data:

1. Irradiance <1200 and >200 W/m²  Eliminate nighttime
2. Clearness index (measured/clear sky G_{poa}) <1.1 and >0.9  Clear sky
3. Power is <99% of capacity  Inverter clipping
4. 3 month rolling median filter with ±30% limits  Outages

Clear sky method: trade precision for accuracy

NREL example

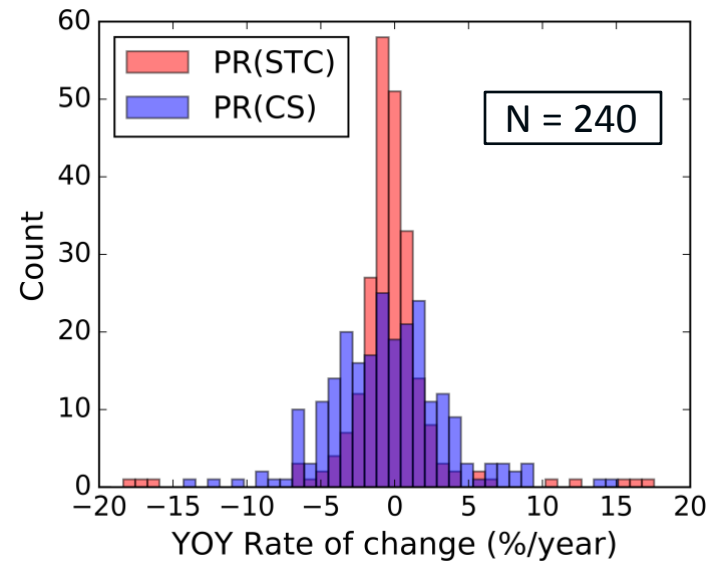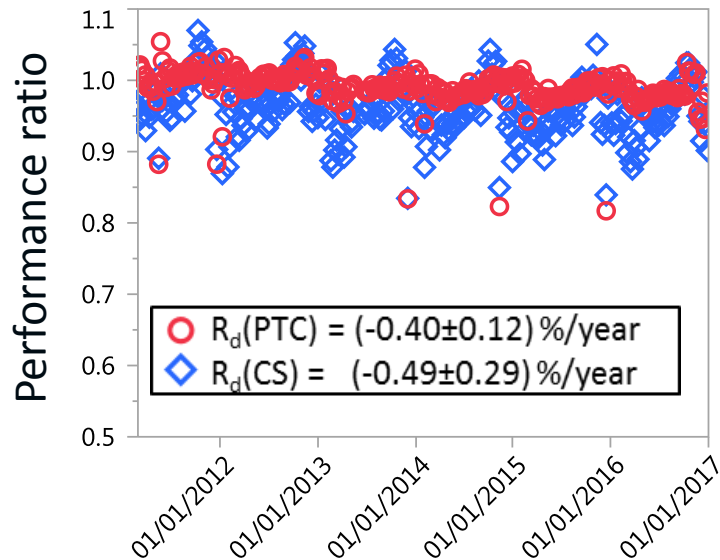

accurate



precise



Use measured irradiance if sensor is well-calibrated

Common headaches

Will it work if the bread is bad or has problems?




Irradiance sensor: the biggest headache for field data

- ✓ What irradiance (temperature) sensor did you have?
- ✓ Was it calibrated?
- ✓ How often was it calibrated?
- ✓ Can you prove it?




Works even with drifting sensor!

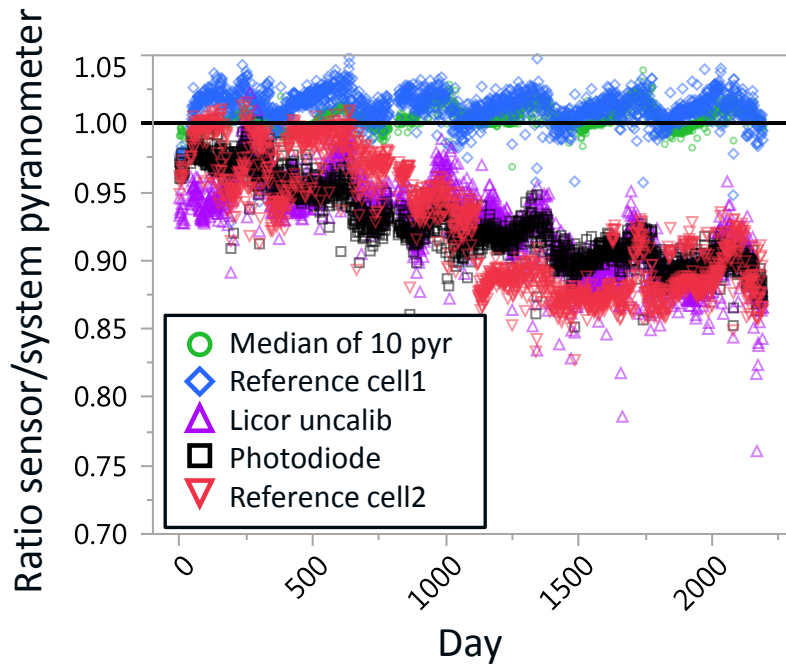


Ratio of listed Gpoa sensor to calibrated pyranometer

Some sensors drift at 1.5 – 2 %/year!

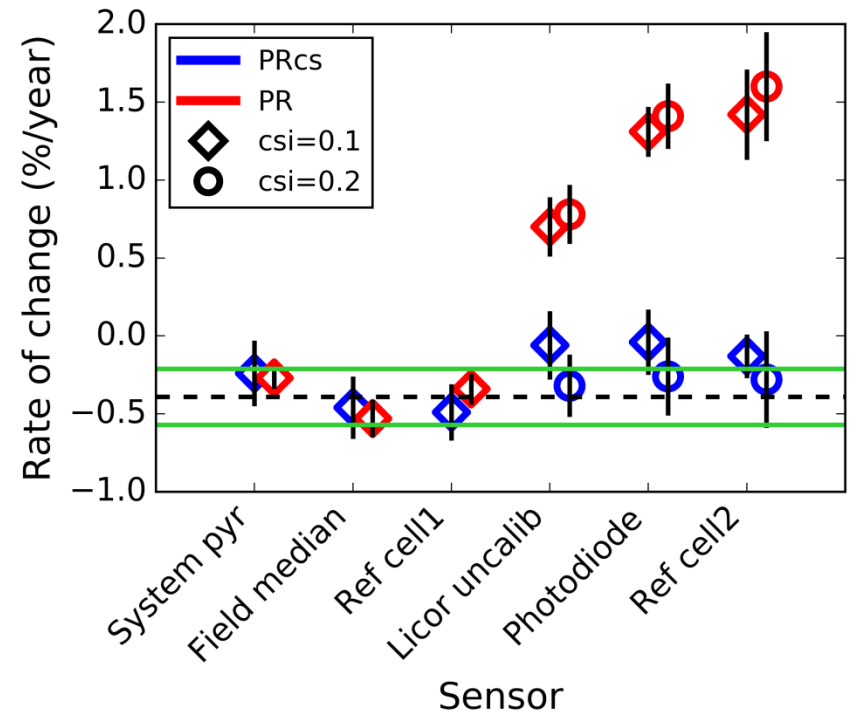


Green interval: ca. 10 more conventional time series analyses and independent tests such as I-V measurements

Works even with data shifts

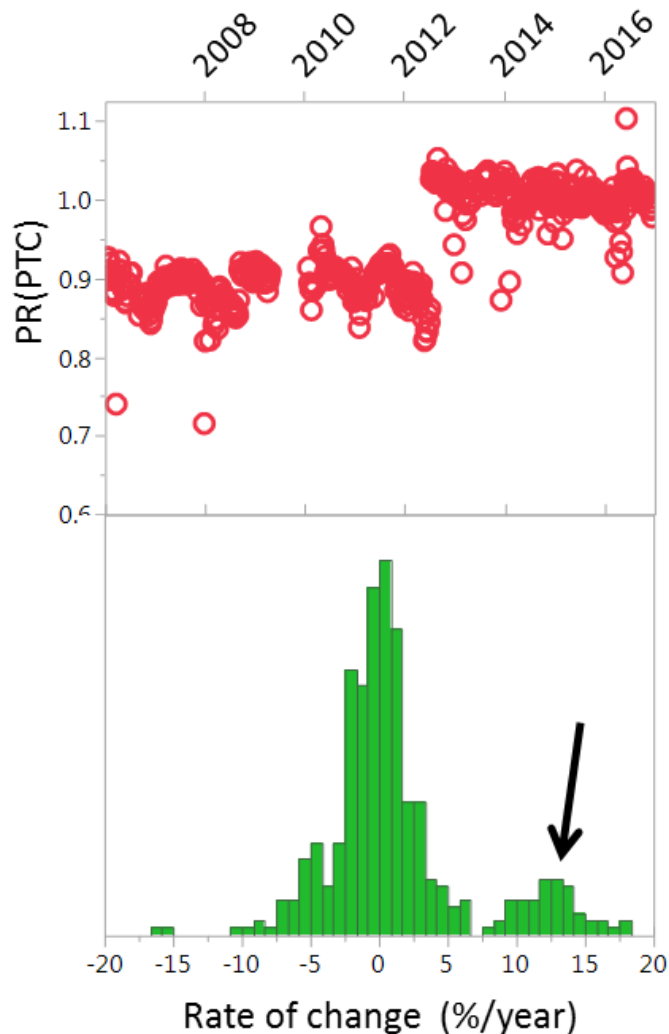

Data shift options:

1. Ignore \rightarrow get in trouble
2. Correct the data shift statistically¹
3. Remove second peak
4. Analyze separately in 2 sections

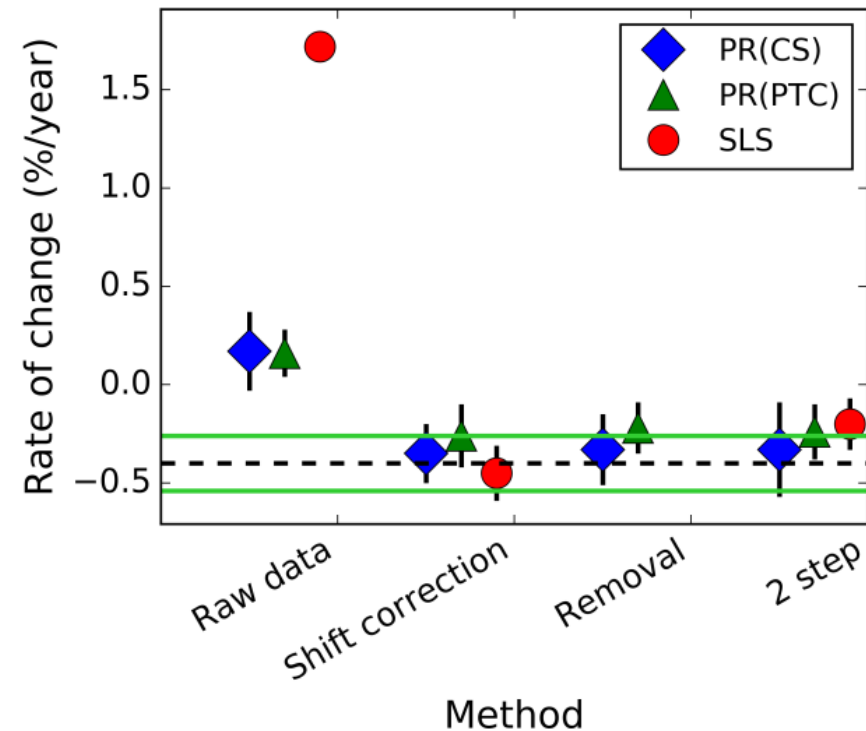


SLS: standard least square regression


¹Jordan et al., 35th PVSC, Honolulu, HI, 2010.

Works in the presence of soiling

Southern California site

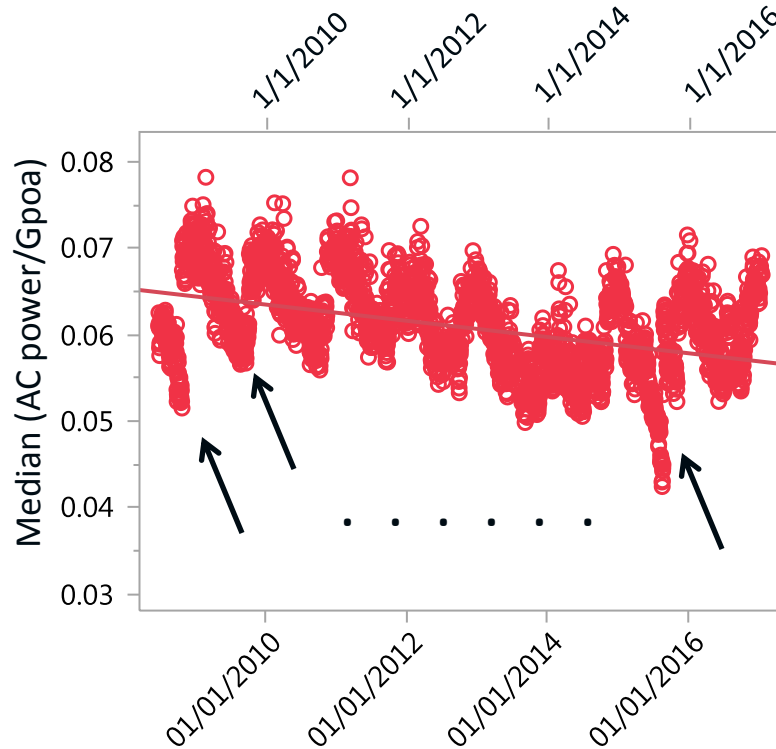



Some of the soiling intervals are pointed by arrows

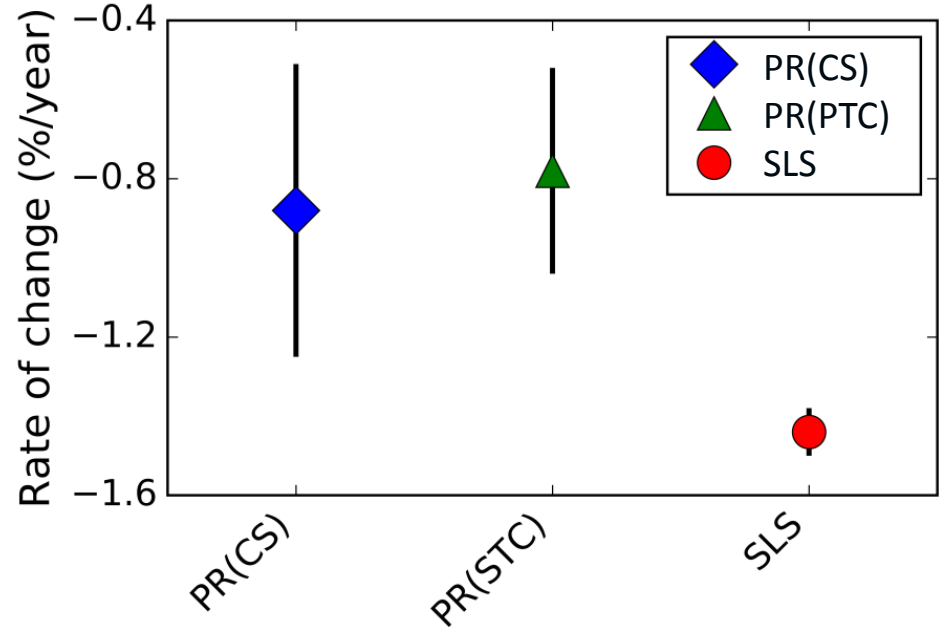

SLS: standard least square regression

Simple regression overestimates the degradation

Works in cloudier climates too

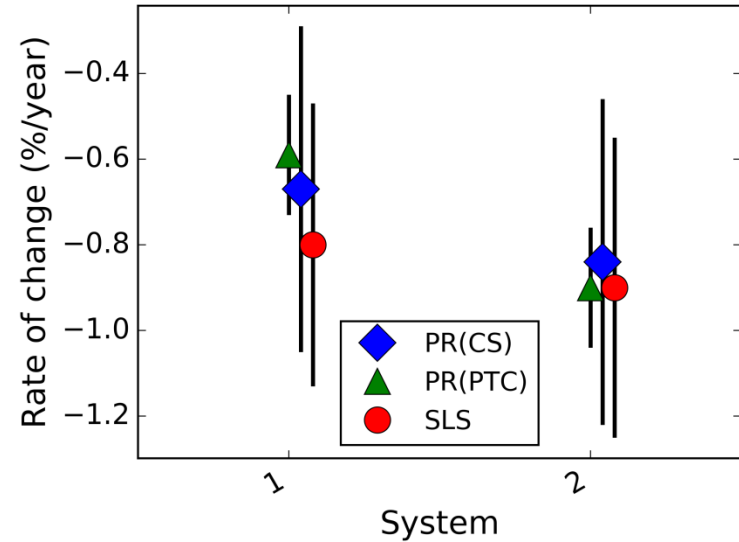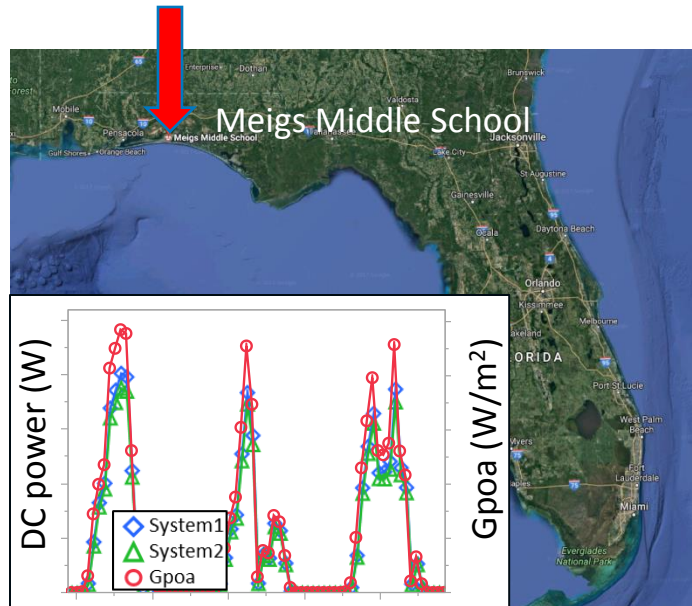


SLS: standard least square regression

Tradeoff: the cloudier the climate the longer the times series

For nonlinearities break series into subsection

HIT module system at NREL

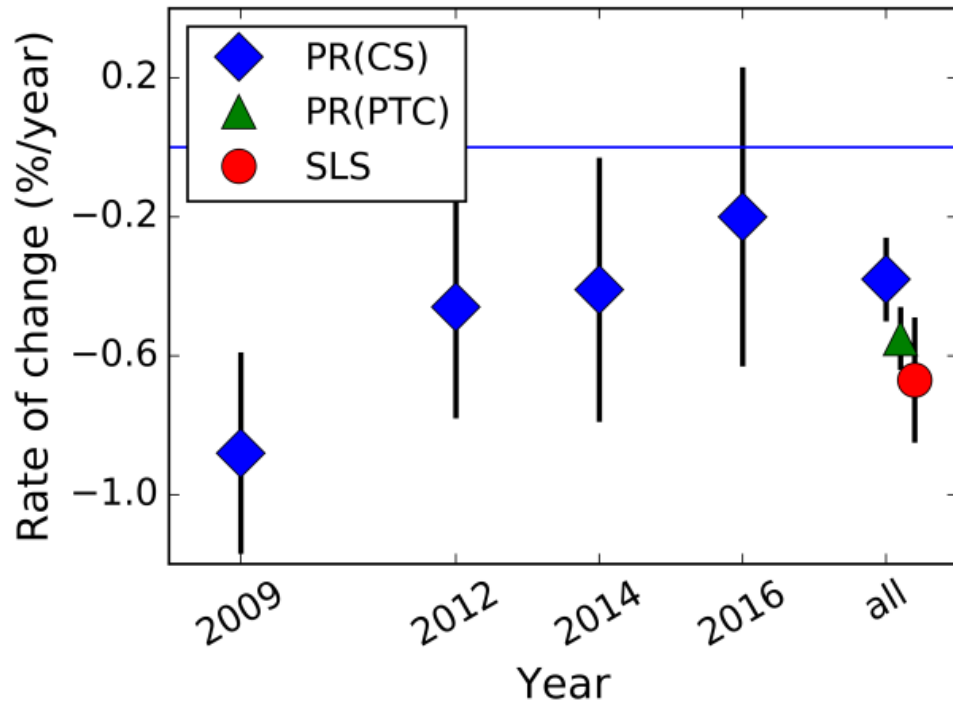

SLS:
standard least square
regression


Non-linear degradation, dominated by Voc

Findings

Application to different types of bread.




Validation of method against conventional analysis

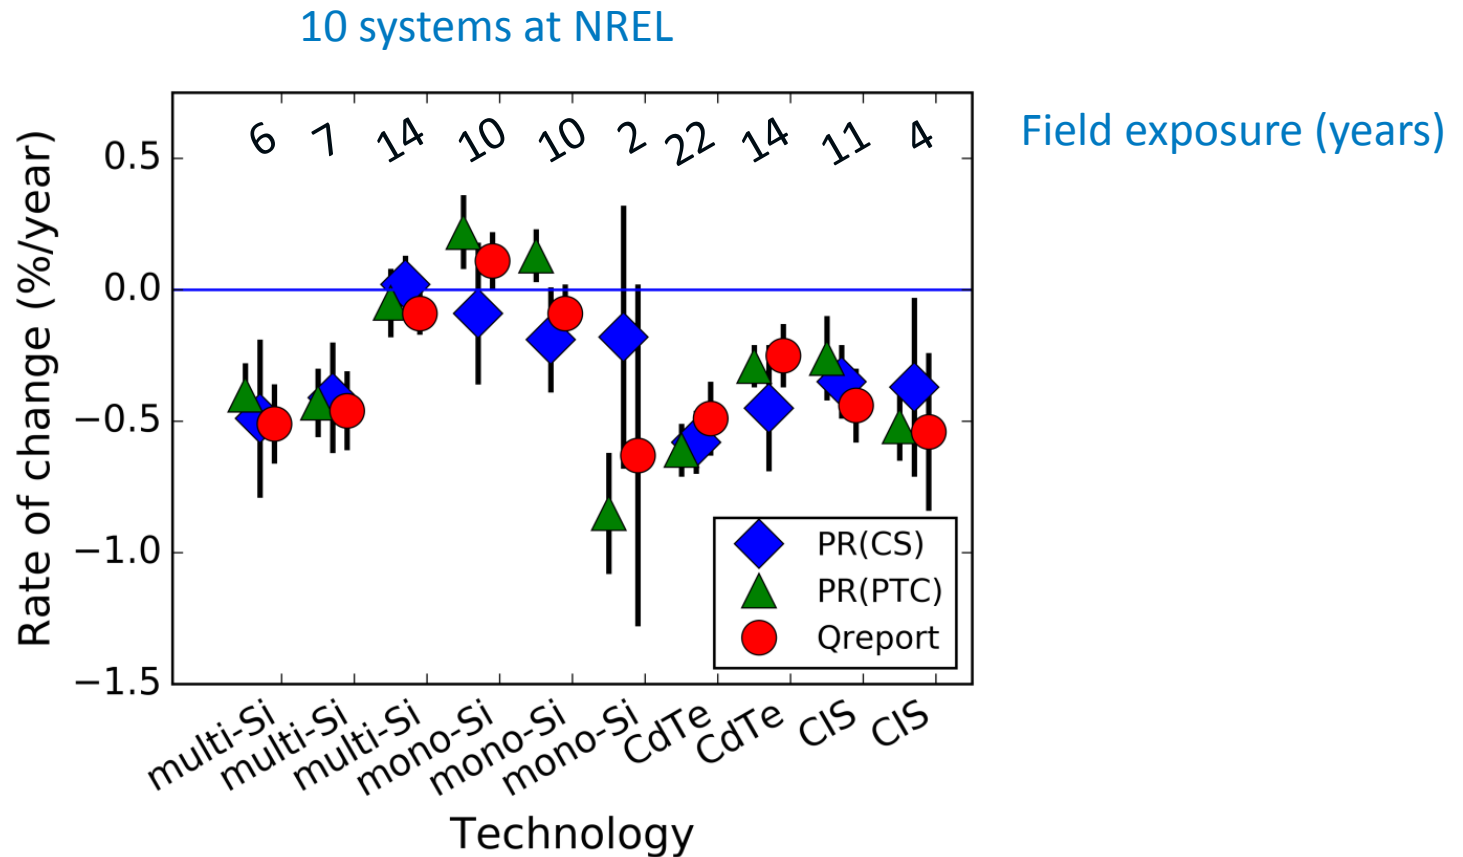

NREL prepares quarterly reports on PV performance based on time series analyses, outdoor + indoor IV measurements.

Good agreement between new and conventional analysis

Analysis of Sunpower fleet

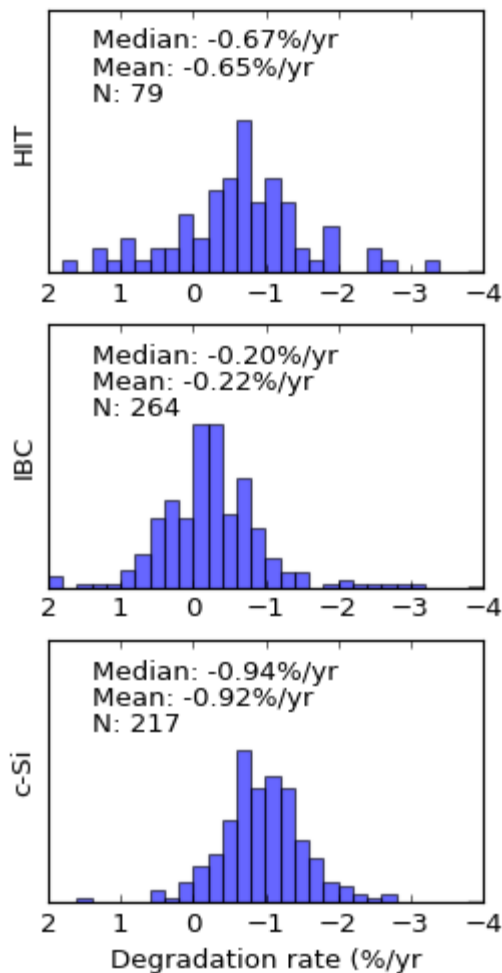


Divided into 3 different x-Si technologies

Interdigitated back contact (IBC) module systems showed lower median degradation rate.

Hot climate & mounting difference

One interesting example only

Disclaimer: may not be statistically representative

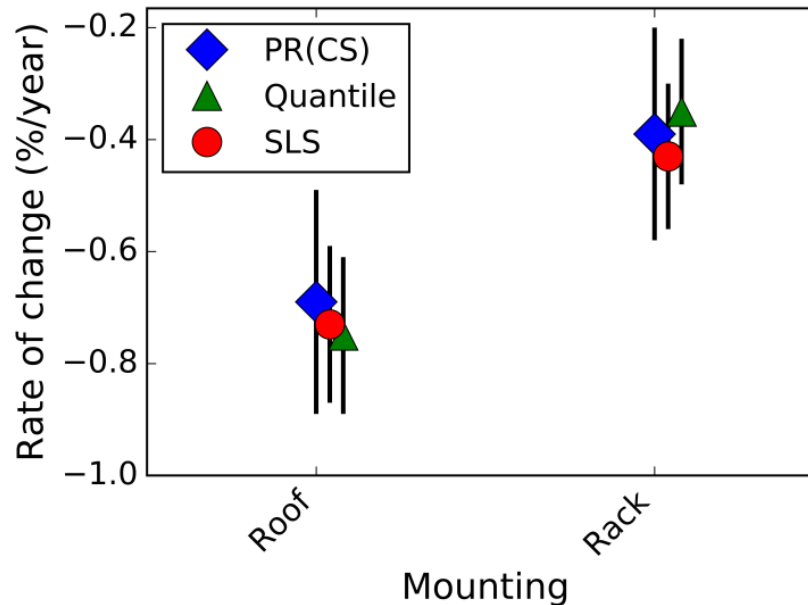


Desert knowledge center – Australia

BP systems, rack and roof mounted

Can achieve relatively low degradation in desert location.
Mounting may have substantial impact on degradation.

Software will be free & publicly available

Software written in Python and available on Github

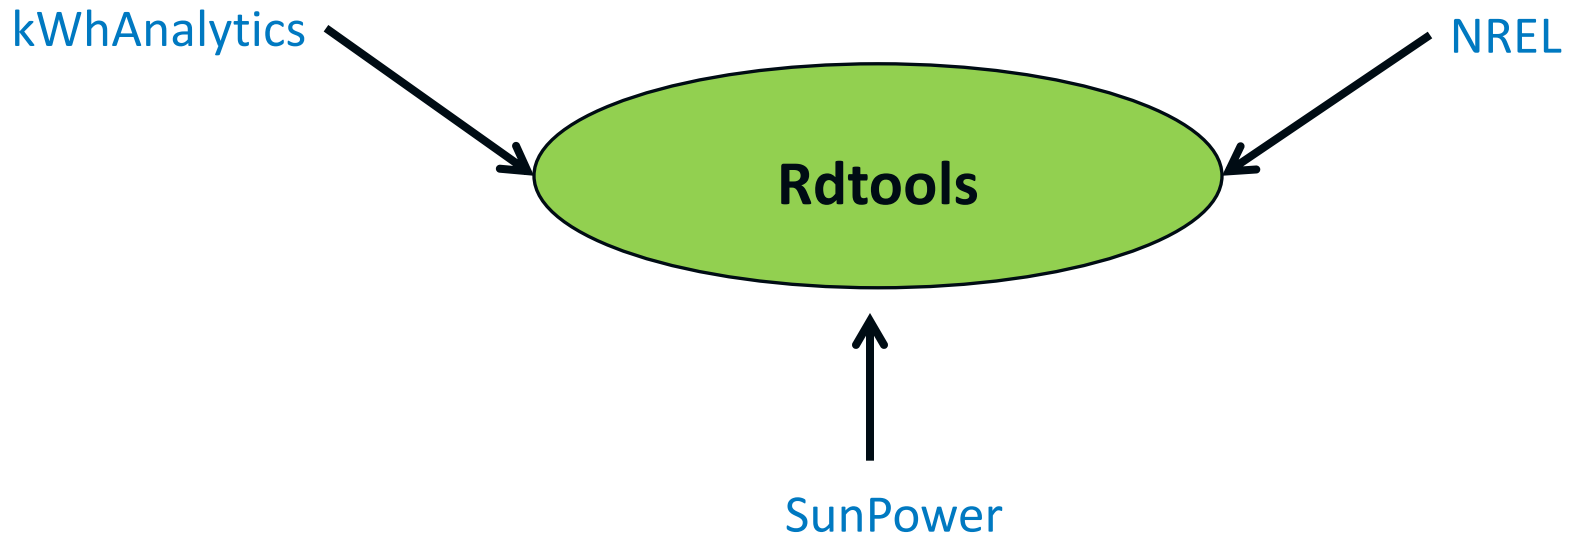

Beta version available later this summer!

Conclusion

- ❖ **Method:**
 1. *Use YoY approach*
 2. *Use clear sky modeled irradiance (Thank you PVLIB)*
 3. *Use clear sky temperature (Thank you NASA)*
- ❖ **It is accurate even in most common field issues such sensor drift/problems, data shifts, soiling, non-linearities etc.**
- ❖ **PRCs prevents poor sensors from looking like **AMAZING** performance!**

Acknowledgments

Thank you for your attention

NREL reliability group

Michael Deceglie

Adam Shinn

Ambarish Nag

Ben Bourne

Kris Davis

National Renewable Energy Laboratory

15013 Denver West Parkway, MS 3411

Golden, CO 80401, USA

dirk.jordan@nrel.gov

This work was supported by the U.S. Department of Energy under Contract No. DE-AC36-08-GO28308 with the National Renewable Energy Laboratory