

# **Fermentation of “Quick Fiber” Produced from a Modified Corn Milling Process into Ethanol and Recovery of Corn Fiber Oil**

**Nick J. Nagle\*<sup>2</sup>, Kelly Ibsen, Melvin P. Tucker<sup>2</sup> Bruce S. Dien<sup>1</sup>, Vijay Singh<sup>3</sup>, Robert A. Moreau<sup>4</sup>, Nancy N. Nichols<sup>1</sup>, David B. Johnson<sup>4</sup>, Michael A. Cotta<sup>1</sup>, Kevin B. Hicks<sup>4</sup>, Quang Nguyen<sup>2</sup>, Sally Noll<sup>6</sup> and Rodney J. Bothast<sup>5</sup>**

# Ethanol Dry Mills

- Over two billion gallons of ethanol were produced in 2002 in the U.S.
- Projected ethanol production is expected to more than double by 2010.
- Currently, 60% of all US ethanol is produced using dry mill technology.
- Traditional starch based operation using standard *S. cerevisiae* cultures.


## Ethanol Dry Mills cont.

- Two major co-products from the dry mill process:
  - Distillers grain (DG)
  - Carbon dioxide
- Over three million tons of DG are produced each year.
  - Used in feed formulations to replace soy bean meal for cattle.
  - Price and market concerns as DG production increases from increased ethanol production.

# Quick Fiber Project Objectives

- Improve profitability of the dry mill ethanol industry.
  - Model the wet milling process with a diversity of co-products from corn processing.
  - Increase ethanol production.
  - Produce higher quality DDG and DDGS.
  - Increase efficiency for the dry mill process




# Quick Germ and Fiber Process\* with Fiber to Ethanol Conversion

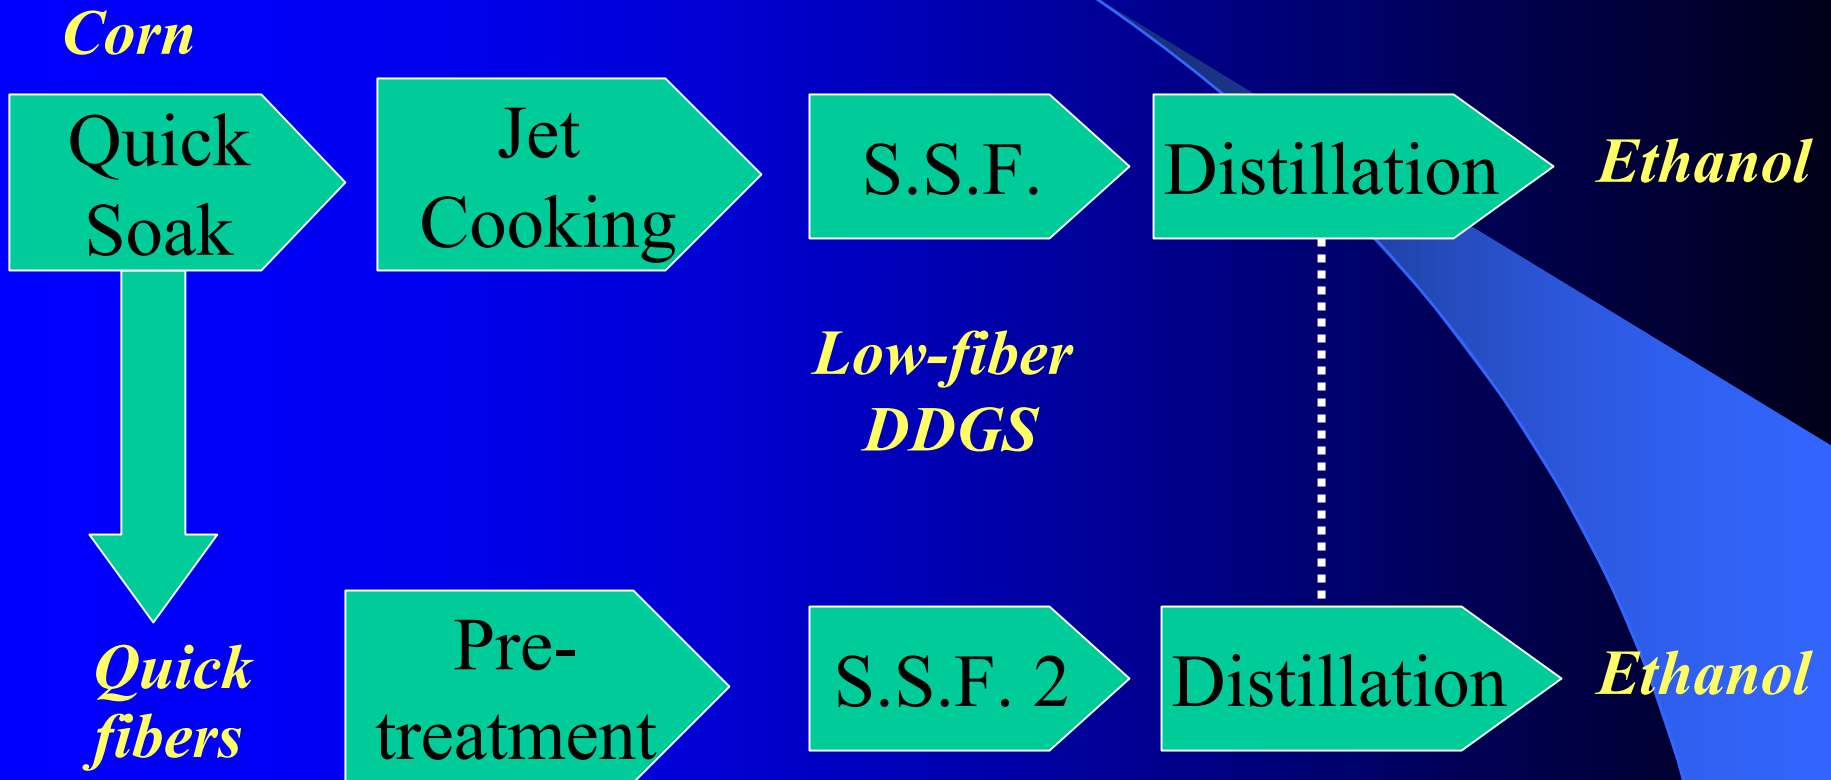

\*Developed by V.J. Singh, U of IL US patent #6,254,914

\*Cereal Chem. 1999 76(6):868-872

# Germ & Fiber Recovery in Dry Mill Process

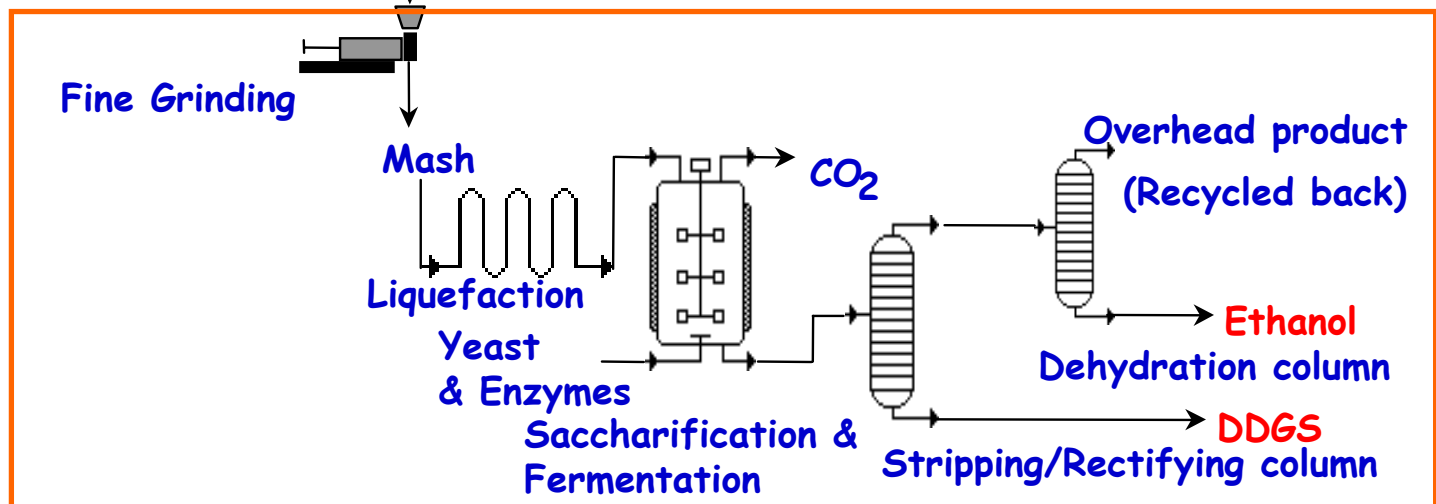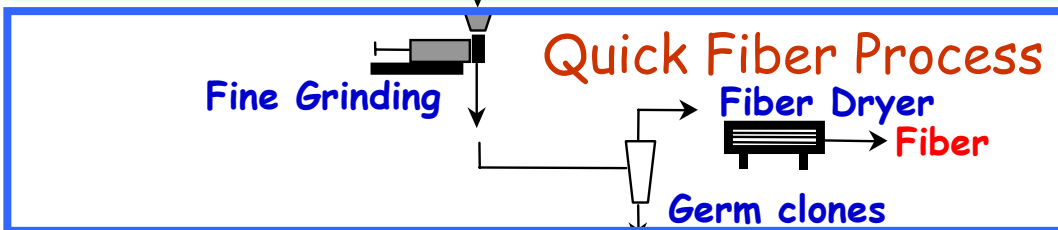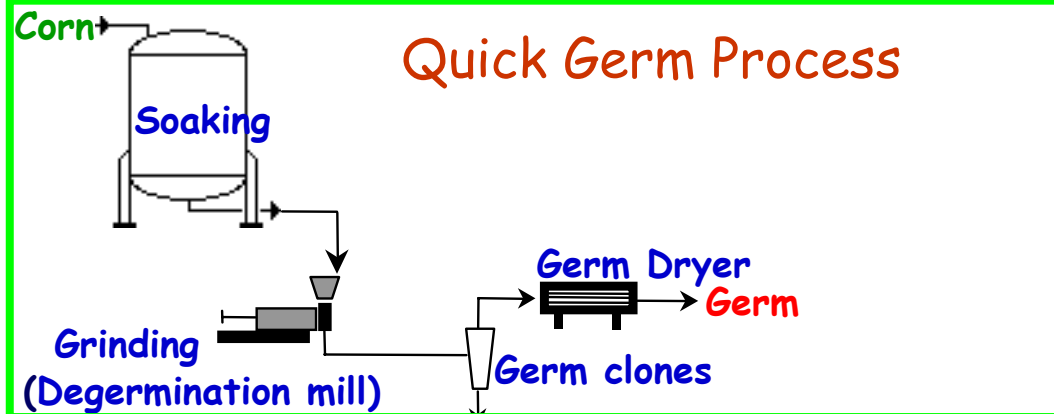

# Fiber Composition

<b>Component</b>	<b>Corn Fiber*</b>	<b>Quick Fiber*</b>
<b>Glucose **(Starch)</b>	<b>11-23</b>	<b>15</b>
<b>Glucose (Cellulose)</b>	<b>12-18</b>	<b>22</b>
<b>Xylose</b>	<b>18-29</b>	<b>17</b>
<b>Arabinose</b>	<b>11-19</b>	<b>11</b>
<b>Protein</b>	<b>11-12</b>	<b>11</b>
<b>Oil</b>	<b>3</b>	<b>1</b>

\* % w/w db

\*\*anhydrous basis

# Theoretical Ethanol Yield from a Bushel of Corn

<b>Product (per bu)</b>	<b>Ethanol Yield (gallons)</b>
<b>Starch</b>	<b>2.5-2.7</b>
<b>Quick Fiber*</b>	<b>0.2</b>

\*Assumes 90% efficiency & 3.8 lb Q.F./bu

One bushel of corn weighs 56 lbs

One gallon of ethanol = 3.785 L = 6.58 lbs



# Potential Co-Products from Quick Fiber Separation

- **Corn Fiber Oil**
  - Extracted from the pericarp, aleurone, and tip cap.
  - Contains phytosterols
  - Phytosterols have been recognized to lower serum cholesterol.
- **Corn Fiber Gums**
  - Comprised mainly of hemicellulose (arabinoxylan)
  - Can be used as a substitute for gum arabic (food emulsifier) or in industrial films and adhesives.

# Experimental Protocol

- Pretreat Quick Fiber using dilute acid.
- Condition and neutralize resulting pretreatment residue and hydrolyzate.
- Determine bioconversion potential of pretreated residue using *S. cerevisiae* and the hydrolyzate using a recombinant *E. coli*.
- Extract oil from starting material, pretreatment residue and SSF residue.

# Dilute Acid Pretreatment of Quick Fiber (Yeast Fermentation)

- Solids loading of Quick fiber was 10-20% dry wt. basis.
- Acid loading at 3.2 % of  $\text{H}_2\text{SO}_4$  per dry wt. of biomass.
- Temperature: 150°C.
- Hydrolysis Time: 10 minutes.
- After hydrolysis, hydrolysate was neutralized with  $\text{Ca}(\text{OH})_2$ .

Conditions based upon Grohmann and Bothast, 1993

## **Dilute Acid Pretreatment of Quick Fiber (Bacterial Fermentation)**

- **Quick fiber was ground using a small grinder.**
- **Solids were pretreated at 121°C using 1% H<sub>2</sub>SO<sub>4</sub> for one hour.**
- **Liquor was filtered from the solids and overlimed using Ca(OH)<sub>2</sub> for one hour.**
- **Liquor was neutralized to pH 7.0 and centrifuged to remove gypsum**
- **Final hydrolzate was filtered sterilized prior to fermentation**

# SSF Conditions

- Solids were loaded at 16.4% db.
- Cellulase (15 FPU/g cellulose),  $\beta$ -glucosidase and glucoamylase were added.
- Inoculated with *S. cerevisiae* and incubated at 32°C for 70 hr in a temperature controlled shaker at 150 rpm.
- Ethanol, sugars and organic acids were analyzed periodically.

# Bacterial Fermentation

- **Recombinant strain E.coli FBR5 was used to ferment all of the sugars in the hydrolyzate.**
- **Mini-bioreactors with pH control were used.**
- **No added cellulase – cellulose partitioned w/ solids.**
- **Inoculated with E. coli FBR5 at 5% v/v inoculum.**
- **Fermentation held at pH 6.5, 35°C for 70 hr.**
- **Ethanol, sugars, and organic acids were analyzed periodically.**

# Pretreatment Results from the Hydrolysis of Quick Fiber Using Dilute Acid


<b>% Acid Loading<sup>a</sup></b>	<b>Glucose<sup>b</sup></b>	<b>Xylose<sup>b</sup></b>	<b>Arabinose<sup>b</sup></b>	<b>pH<sup>c</sup></b>
<b>0</b>	<b>75±0</b>	<b>16±0</b>	<b>39±0</b>	<b>4.41 ±0.07</b>
<b>0.8</b>	<b>92±2</b>	<b>50±6</b>	<b>77±2</b>	<b>2.78 ±0.00</b>
<b>1.6</b>	<b>90±1</b>	<b>74±9</b>	<b>86±3</b>	<b>2.12 ±0.07</b>
<b>3.2</b>	<b>92±3</b>	<b>98±6</b>	<b>98±4</b>	<b>1.89 ±0.07</b>
<b>4.8</b>	<b>87±4</b>	<b>98±8</b>	<b>87±0</b>	<b>1.56 ±0.09</b>

<sup>a</sup> % g H<sub>2</sub>SO<sub>4</sub> per g biomass

<sup>b</sup> % of theoretical yield

<sup>c</sup> measured following pretreatment

# SSF of Pretreated Quick Fiber by *S. cerevisiae*

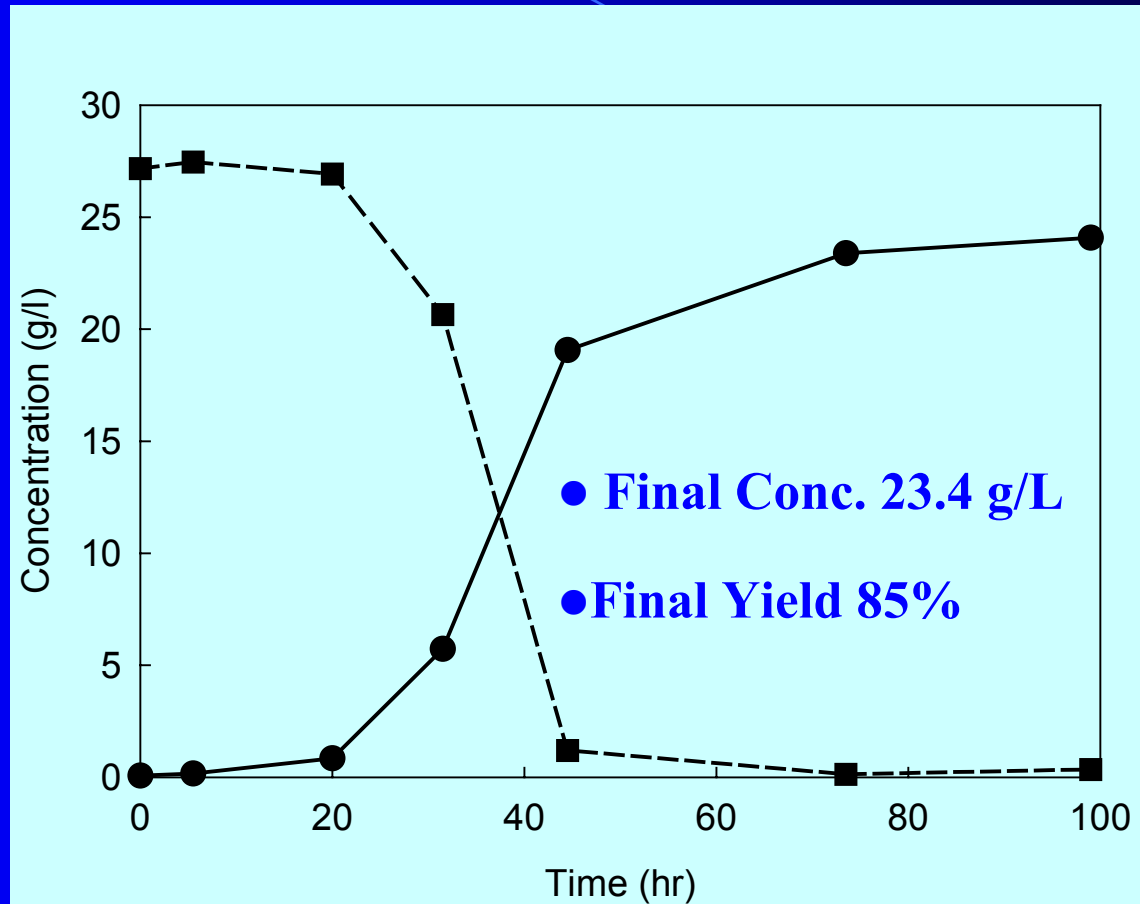


Legend: ■ Glucose ● Ethanol.



# Fermentation Results For Various Fibrous Feedstock's Using Ethanologenic Strain FBR5


Feedstock	Initial Hydrolyzate Sugar Concentrations % w/v			Maximum	Ethanol	Ethanol
	<u>Arabinose</u>	<u>Glucose</u>	<u>Xylose</u>	<u>Ethanol</u> %w/v	<u>Yield</u> g/g	<u>Productivity</u> g/l/hr
Quick Fiber	1.47	3.13	3.40	3.52±0.03	0.44±0.00	0.43±0.04
DWG	0.79	1.96	1.23	2.12±0.05	0.49±0.01	0.71±0.01
Corn Fiber	2.00	2.80	3.70	3.74±0.01	0.46±0.00	0.77±0.05

# Fermentation of Quick Fiber Hydrolyzate by Strain FBR5

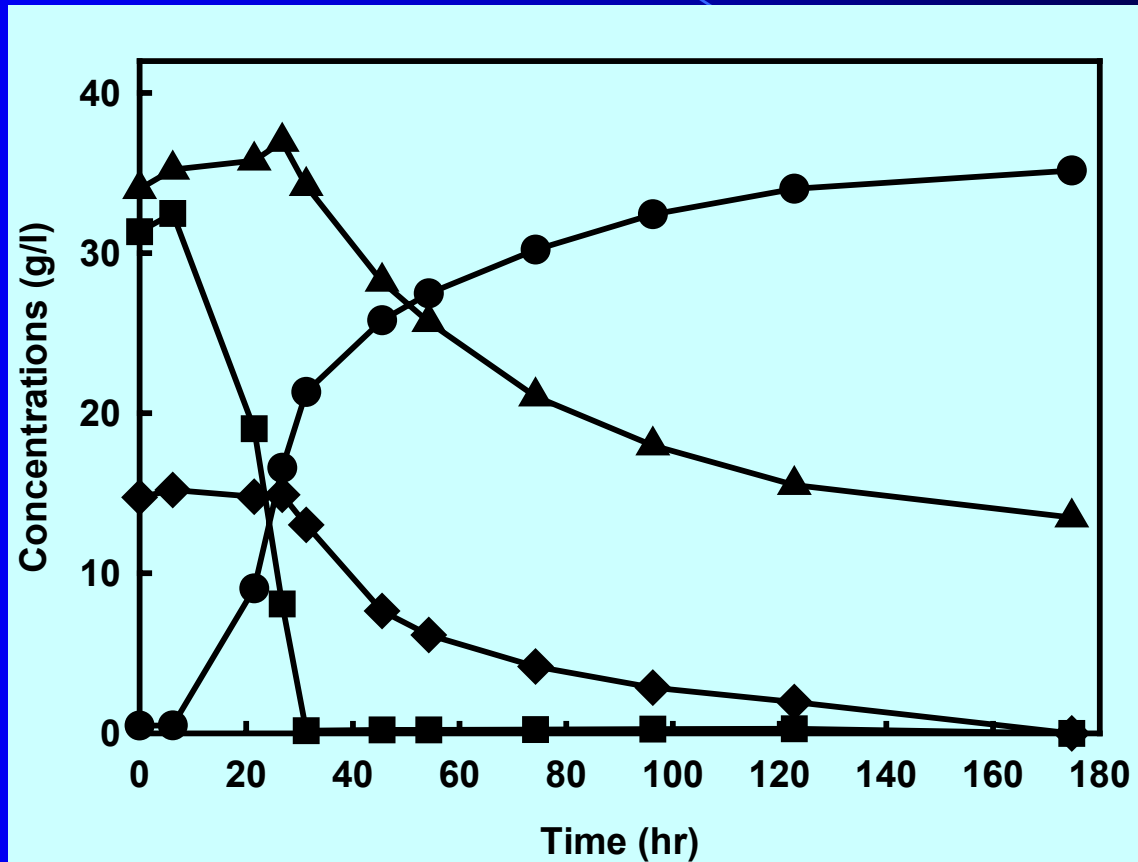

Legend: ▲ Xylose ■ Glucose ◆ Arabinose, and ● Ethanol

# Fermentation of Control Sugar Mixture by Strain FBR5

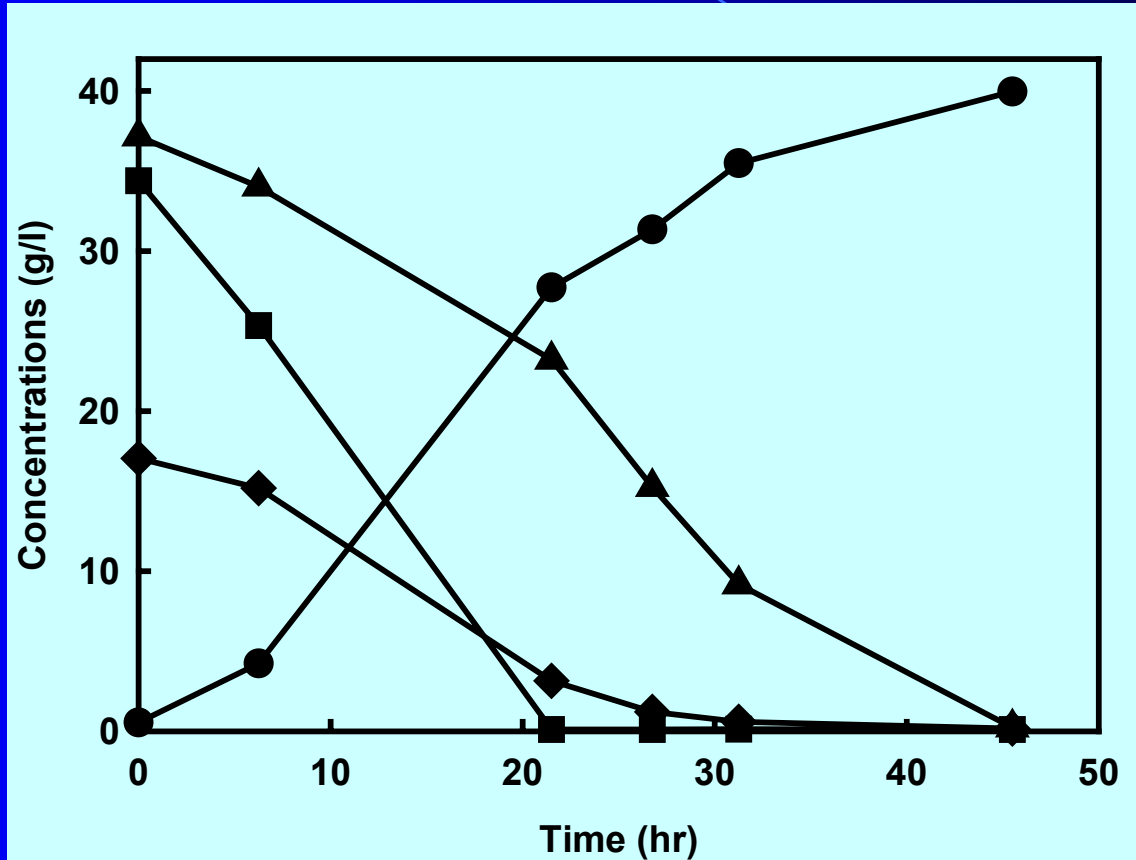

Legend: ▲ Xylose ■ Glucose ◆ Arabinose, and ● Ethanol

# Recovery Of Corn Fiber Oil From Process Fiber Residues

<b>Fiber Source</b>	<b>Total Oil % w/w</b>	<b>Free Sterol Yield w% oil</b>	<b>FPE<sup>1</sup> Yield w% oil</b>	<b>St:E<sup>2</sup> Yield %w oil</b>
<b>Pre SSF</b>	<b>7.9 ± 0.1</b>	<b>4.43 ± 0.19</b>	<b>3.27 ± 0.04</b>	<b>7.9 ± 0.1</b>
<b>Post SSF</b>	<b>1.8 ± 0.5</b>	<b>6.03 ± 3.74</b>	<b>5.82 ± 3.66</b>	<b>1.2 ± 0.57</b>
<b>Post FBR5 Ferm</b>	<b>12.2 ± 1.8</b>	<b>5.80 ± 0.79</b>	<b>4.29 ± 0.69</b>	<b>12.2 ± 1.8</b>

<sup>1</sup> FPE= Ferulate Phytosterol Esters

<sup>2</sup> St:E = Phytosterol Fatty Acyl Esters

# Conclusion

## *Quick Germ and Quick Fiber Process :*

- Remove non-fermentable material from process stream.
- Increase fermentor capacity leading to increasing ethanol production.
- Achieve high yields of sugars resulting from pretreatment.
- Achieve high levels of bioconversion using C5 or C6 organisms.
- Lead to potential co-products from corn fiber oil and gum.
- Allow for the dry mill process to model the wet milling process using less capital investment.
- Increase profitability and efficiency of the dry mill process.

# Future Work: Scale-Up Fiber Conversion

## *Acid Impregnation Study*



**30 qt. bread dough  
mixer**



**Fiber sprayed with  
red dye**

# Scale-Up of Fiber Conversion Using Several Types of Pretreatment Reactors



**Zipperclave**



**4 L Steam Gun**

# Acknowledgement

**<sup>1</sup> National Center for Agricultural Utilization Research, USDA, Agricultural Research Service**

**<sup>2</sup> National Bioenergy Center, Biotechnology Division for Fuels and Chemicals, National Renewable Energy Laboratory**

**<sup>3</sup> Eastern Regional Research Center, Agricultural Research Service. USDA**

**<sup>4</sup> Department of Agricultural Engineering, University of Illinois, Urbana, IL**

**<sup>5</sup> National corn to ethanol research pilot plant, SIU Edwardsville,**